

REV.	DESCRIPTION	DATE	BY
B	SEE ECO GM-9344	2/22/99	CGA

MATERIAL AND FINISH

HOUSING AND
INTERFACE RING:

CRES 303 PER ASTM A 484
AND ASTM A 582 OR ASTM A 555
AND ASTM A 581. PASSIVATE PER
MIL-F-14072 E300.

CENTER CONTACT:


BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.
GOLD PLATE PER MIL-G-45204;
TYPE I, GRADE C, CLASS 1.
OVER NICKEL PER QQ-N-290A;
CLASS 1; 50 MICROINCHES MIN.

DIELECTRICS:

VIRGIN PTFE FLUOROCARBON PER
ASTM D 1710 AND ASTM D 1457.

O-RINGS AND
GASKET:

SILICONE RUBBER PER ZZ-R-765.

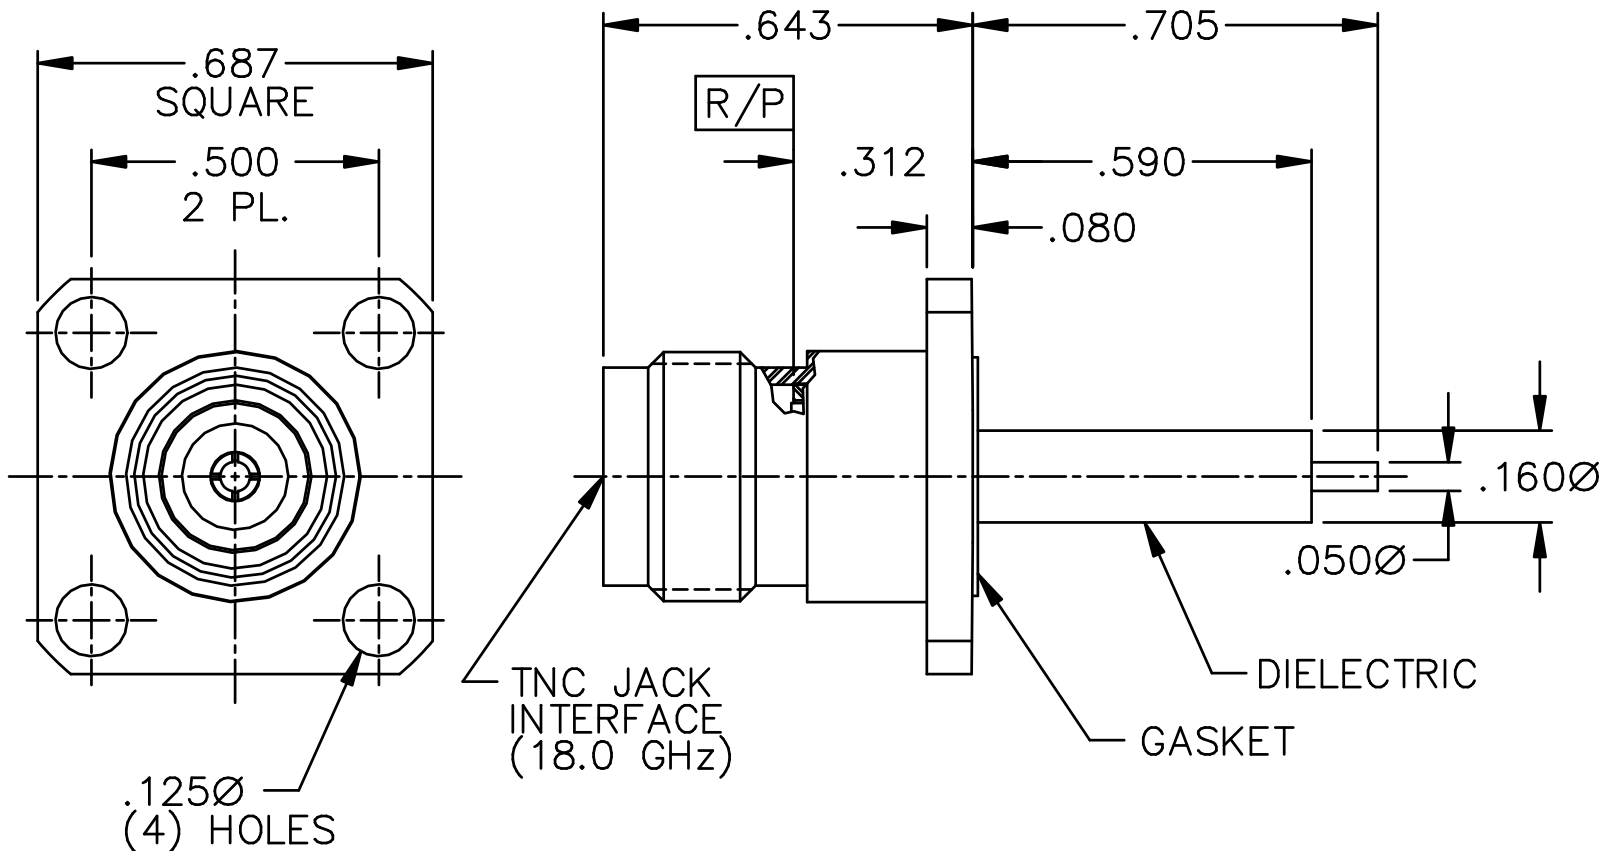

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use, or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co. Inc.

ALL DIMENSIONS ARE IN INCHES

CAT. NO. 0412-004-3

CODE IDENT NO.
82316

GILBERT ENGINEERING CO., INC.

BY		DATE	TITLE OUTLINE DRAWING FOR TNC JACK 4 HOLE FLANGE MOUNT STRAIGHT TERMINAL WEATHER SEALED (18.0 GHz)	
DRAWN: CGA		11/24/87		
ASSEMBLY PROCEDURES: NONE				
SOURCE FILE: MECR# 723	SHT. 1	OF 1	DWG. NO. OL-0412-004-3	REV B