


1. DIMENSIONS IN [] ARE IN INCHES.

2. MAXIMUM INSERTION LOSS IS 0.5d PLUS
CABLE ATTENUATION OF 1.5dB/km AT 1300nm.

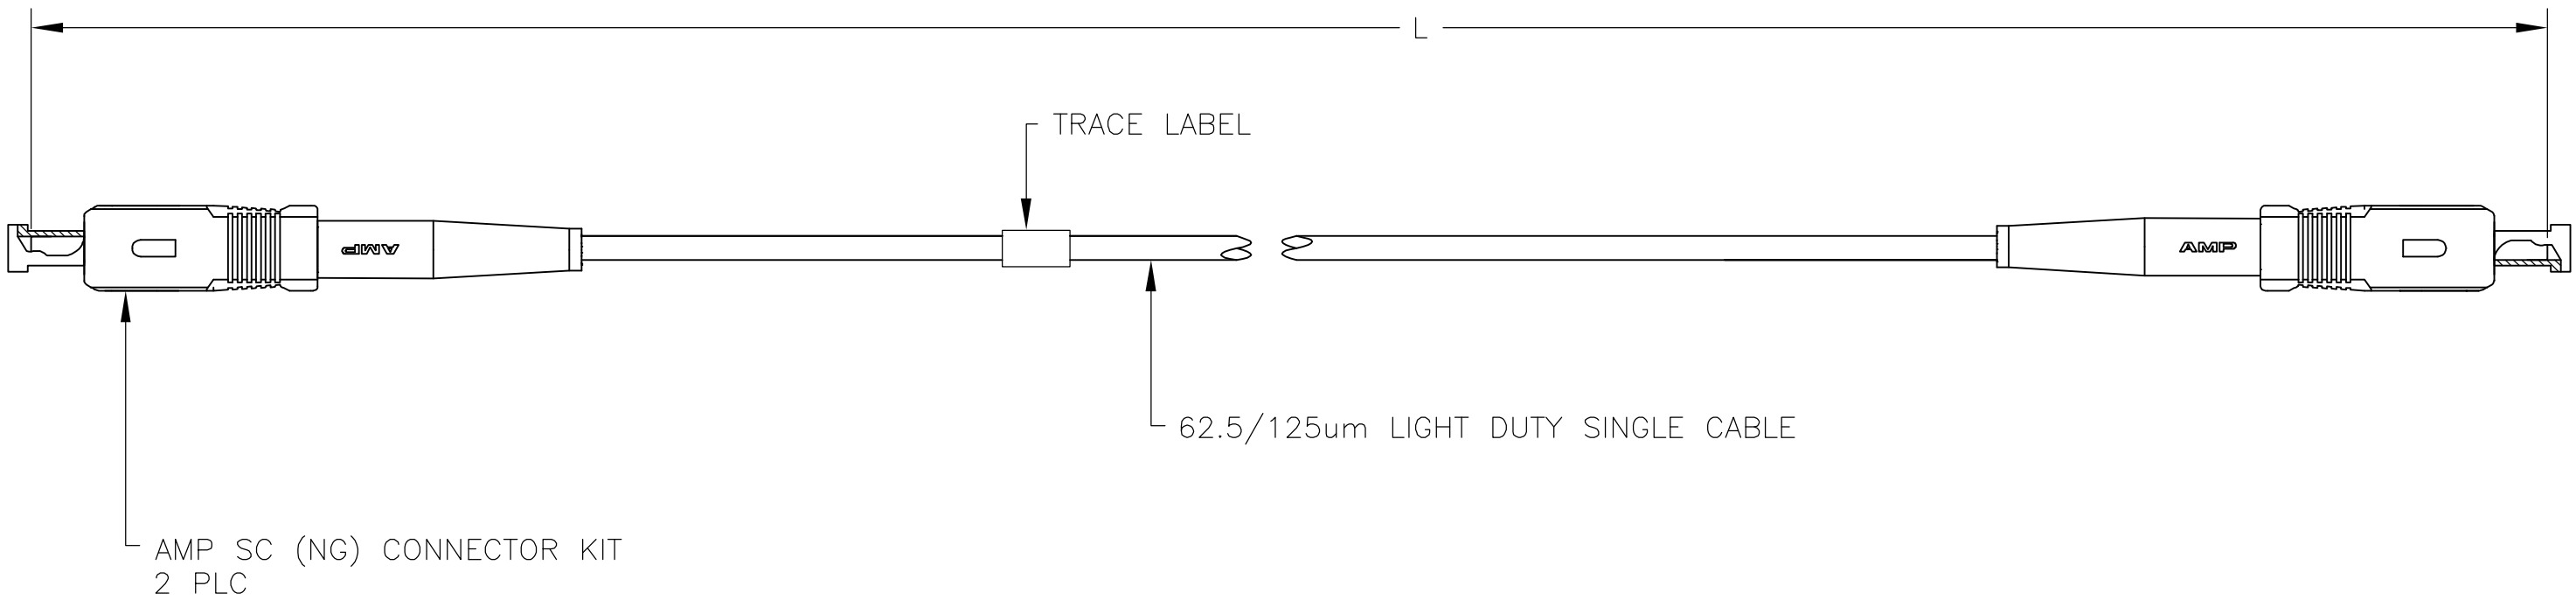

3.50	2000±20 [78740±787]	9-504970-9
1.33	550±5 [21653±197]	9-504970-8
0.52	12.80±0.15 [504±6]	1-504970-4
0.51	6.70±0.08 [264±3]	1-504970-3
0.50	4.00±0.08 [157.5±3.0]	1-504970-2
0.52	13.72±0.15 [540±6]	1-504970-1
0.52	12.19±0.15 [480±6]	1-504970-0
0.52	10.67±0.15 [420±6]	504970-9
0.51	6.1±0.08 [240±3]	504970-8
0.53	20±0.3 [787±12]	504970-7
0.52	15±0.15 [591±6]	504970-6
0.52	10±0.15 [394±6]	504970-5
0.51	5±0.08 [197±3]	504970-4
0.50	3±0.05 [118±2]	504970-3
0.50	2±0.05 [79±2]	504970-2
0.50	1±0.05 [39±2]	504970-1
MAX IL (dB)	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.URICH		20APR99				Tyco Electronics Corporation	
		CHK R.PAUL		23APR96				Harrisburg, Pa 17105-3608	
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD N.MILLER		24APR96		NAME	
		0 PLC ± -		PRODUCT SPEC		CABLE ASSY, FIBER OPTIC, 62.5/125µm LDS, AMP SC (NG) TO AMP SC (NG), OPTIMATE			
		1 PLC ± -		—					
		2 PLC ± -		—					
		3 PLC ± -		APPLICATION SPEC					
		4 PLC ± -		—					
		ANGLES ± -				SIZE		CAGE CODE	
MATERIAL		FINISH		WEIGHT		DRAWING NO		RESTRICTED TO	
—		—		—		A2 00779 C=504970		—	
CUSTOMER DRAWING						SCALE		SHEET	
						NTS		1 OF 1	
								REV	
								F	