


表1 (List No. 1)



社内番号	A mm	B mm	C mm	D mm	E mm	Contact Finish
GMF-NC 9H6GBFY1	30.8	24.99	12.6	7.82	16.26	Contact Zone: AU03
" " 15 "	39.1	33.32			24.59	
" " 25 "	53.0	47.04			38.30	DIP Zone: Solder Plating
" " 37 "	69.3	63.50	15.4	10.69	54.76	
" " 50 "	66.9	61.11			52.35	
GMF-NC 9H6GBFY2						Contact Zone: AU0.76
" " 15 "				上		
" " 25 "						DIP Zone: Solder Plating
" " 37 "						
" " 50 "						
GMF-NC 9H6GBFY3						Contact Zone: AU0.76
" " 15 "				上		
" " 25 "						DIP Zone: Solder Plating
" " 37 "						
" " 50 "						

15.37.50は現在討案中です。

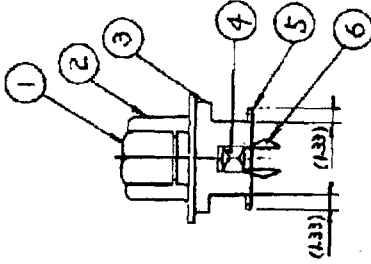

This drawing shows

1. GMF-NC25H6GBFY(1)を承ります。
2. 本品は大同社の器具が材料の作りかえされています。
3. 差板の取り付けは別紙を参照して下さい。

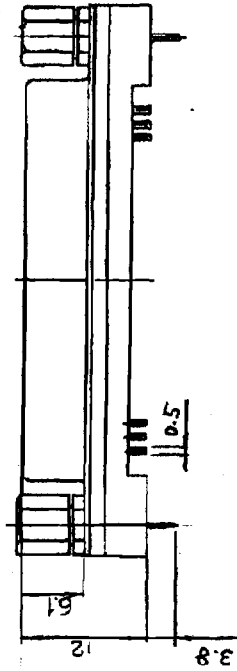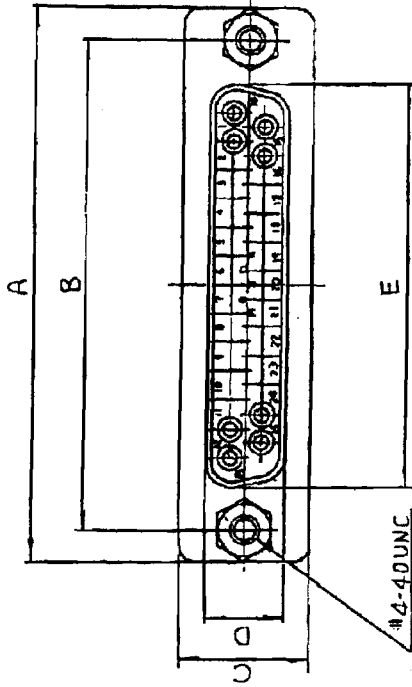

品名	仕様	数量	単位	備考
6	Each Lock Pin	2	個	2 Solder Plate
5	Socket Contact	2	個	2 W. Plate
4	Hexagonal Nut	1	個	1 W. Plate
3	Insulator	1	個	1 W. Plate
2	Shell	2	個	2 "
1	Hexagonal Fitting	2	個	2 "

日付	内容	単位	数量	備考
5.14.10(1973)	2/	個	2	2 Solder Plate

日付	内容	単位	数量	備考
5.14.10(1973)	2/	個	2	2 Solder Plate

日付	内容	単位	数量	備考
5.14.10(1973)	2/	個	2	2 Solder Plate

