




EMC® Product "SPS" Series

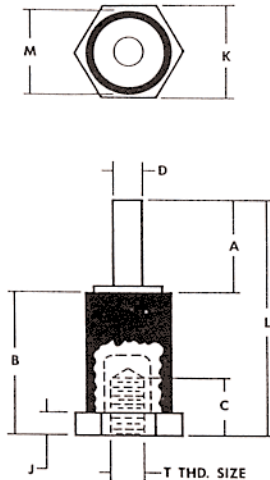

Type 98

Plating:

- 14: 400μ" Tin terminal,
200μ" Cadmium Chromate base/eyelet
- 4: 30μ" Gold terminal,
200μ" Cadmium Chromate base/eyelet
- 17: 400μ" Tin terminal,
200μ" Nickel base/eyelet
- 52: 400μ" Tin terminal,
200μ" Cadmium Chromate base/eyelet

Material:

Terminal: Brass, 1/2-hard, QQ-B-626
Base/Eyelet: Brass, 1/2-hard, QQ-B-626
Insulator: Diallyl Phthalate, MIL-M-14F Type SDG

Type	EMC Part #	Flash-over Volt.	A	B	C	D	J	K	L	M	T
98	4606-14-1	9000	.250 (6.35)	.500 (12.70)	.219 (5.56)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.750 (19.05)	.232 (5.89)	2-56
98	4604-14-1	9000	.250 (6.35)	.500 (12.70)	.219 (5.56)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.750 (19.05)	.232 (5.89)	6-32
98	4602-14-1	9000	.250 (6.35)	.500 (12.70)	.219 (5.56)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.750 (19.05)	.232 (5.89)	4-40
98	6052-14-1	8000	.250 (6.35)	.375 (9.53)	.156 (3.96)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.625 (15.88)	.232 (5.89)	6-32
98	6051-14-1	8000	.250 (6.35)	.375 (9.53)	.156 (3.96)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.625 (15.88)	.232 (5.89)	4-40
98	2762-14-1	8000	.250 (6.35)	.375 (9.53)	.156 (3.96)	.078 (1.98)	.062 (1.57)	.250 (6.35)	.625 (15.88)	.232 (5.89)	2-56
98	4351-14-1	8000	.219 (5.56)	.375 (9.53)	.219 (5.56)	.076 (1.93)	.062 (1.57)	.250 (6.35)	.594 (15.09)	.232 (5.89)	2-56
98	2658-14-1	8000	.290 (7.37)	.375 (9.53)	.156 (3.96)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.665 (16.89)	.232 (5.89)	4-40
98	2659-14-1	8000	.290 (7.37)	.375 (9.53)	.156 (3.96)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.665 (16.89)	.232 (5.89)	6-32
98	2009-14-1	6000	.290 (7.37)	.375 (9.53)	.156 (3.96)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.665 (16.89)	.232 (5.89)	6-32
98	2003-14-1	6000	.290 (7.37)	.375 (9.53)	.156 (3.96)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.665 (16.89)	.232 (5.89)	4-40
98	6065-52-6	6000	.290 (7.37)	.594 (15.09)	.219 (5.56)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.883 (22.43)	.232 (5.89)	4-40
98	6066-52-6	6000	.290 (7.37)	.594 (15.09)	.219 (5.56)	.070 (1.78)	.062 (1.57)	.250 (6.35)	.883 (22.43)	.232 (5.89)	6-32
98	2178-14-1	3000	.188 (4.78)	.234 (5.94)	.078 (1.98)	.062 (1.57)	.046 (1.17)	.156 (3.96)	.422 (10.72)	.146 (3.71)	2-56