





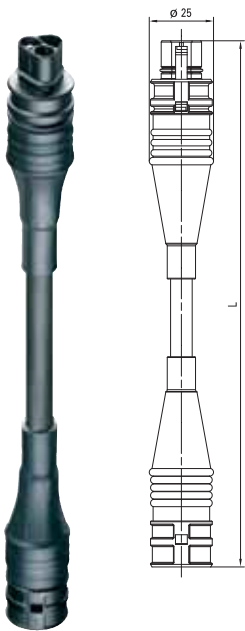


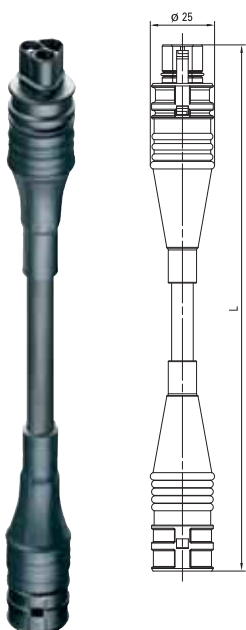
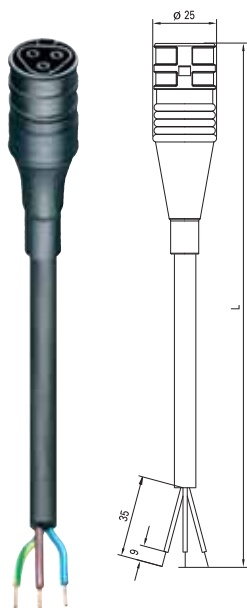
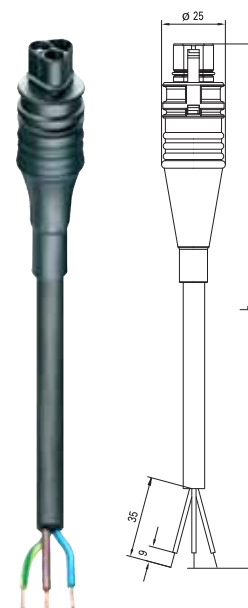


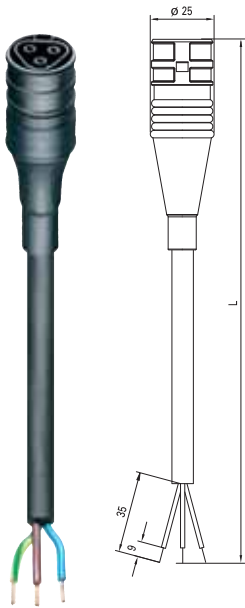

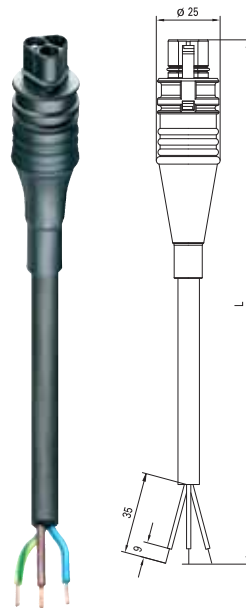

Cable assemblies, 2.5 mm

		Extension cable	Connection cable	Connection cable			
		H05VV-F 3x2.5 Female – Male with locking device	H05VV-F 3x2.5 Female – Free end with ultrasonically compressed wire ends	H05VV-F 3x2.5 Male – Free end with ultrasonically compressed wire ends and locking device			
			Cable strip length: 35 mm Insulation strip length: 9 mm	Cable strip length: 35 mm Insulation strip length: 9 mm			
<p>Cable assemblies</p>  <p>N = bl L = br ground = gn/yl</p>							
Cable ¹⁾ and shrinkage tube in black							
Application	Length ²⁾	Part No.	Std. Pack	Part No.	Std. Pack	Part No.	Std. Pack
Mains 250 V		Black insulation					
L, N, ground  Female	1.0 m	96.233.1000.1		96.233.1003.1		96.233.1004.1	
	2.0 m	96.233.2000.1		96.233.2003.1		96.233.2004.1	
	3.0 m	96.233.3000.1		96.233.3003.1		96.233.3004.1	
	4.0 m	96.233.4000.1		96.233.4003.1		96.233.4004.1	
	5.0 m	96.233.5000.1		96.233.5003.1		96.233.5004.1	
	6.0 m	96.233.6000.1		96.233.6003.1		96.233.6004.1	
	7.0 m	96.233.7000.1		96.233.7003.1		96.233.7004.1	
	8.0 m	96.233.8000.1		96.233.8003.1		96.233.8004.1	
Male 	1.0 m	Gray insulation					
	2.0 m						
	3.0 m						
	4.0 m						
	5.0 m						
	6.0 m						
	7.0 m						
	8.0 m						
Mains 250/400 V 1, 2, ground  Female	1.0 m	Green insulation					
	2.0 m	96.233.1001.7		96.233.1005.7		96.233.1006.7	
	3.0 m	96.233.2001.7		96.233.2005.7		96.233.2006.7	
	4.0 m	96.233.3001.7		96.233.3005.7		96.233.3006.7	
	5.0 m	96.233.4001.7		96.233.4005.7		96.233.4006.7	
	6.0 m	96.233.5001.7		96.233.5005.7		96.233.5006.7	
	7.0 m	96.233.6001.7		96.233.6005.7		96.233.6006.7	
	8.0 m	96.233.7001.7		96.233.7005.7		96.233.7006.7	
Male 	1.0 m	96.233.8001.7		96.233.8005.7		96.233.8006.7	
	2.0 m						
	3.0 m						
	4.0 m						
	5.0 m						
	6.0 m						
	7.0 m						
	8.0 m						

¹⁾ Other cables available on request

²⁾ Other lengths available on request

		Extension cable	Connection cable	Connection cable	
		H07RN-F 3x2.5	H07RN-F 3x2.5	H07RN-F 3x2.5	
		Female – Male with locking device	Female – Free end with ultrasonically compressed wire ends	Male – Free end with ultrasonically compressed wire ends and locking device	
			Cable strip length: 35 mm Insulation strip length: 9 mm	Cable strip length: 35 mm Insulation strip length: 9 mm	
Cable assemblies					
 <p>N = bl L = br ground = gn/yl</p>					
Cable ¹⁾ and shrinkage tube in black					
Application	Length ²⁾	Part No.	Std. Pack	Part No.	Std. Pack
Mains 250 V		Black insulation			
L, N, ground  Female	1.0 m	96.233.1030.1		96.233.1033.1	96.233.1034.1
	2.0 m	96.233.2030.1		96.233.2033.1	96.233.2034.1
	3.0 m	96.233.3030.1		96.233.3033.1	96.233.3034.1
	4.0 m	96.233.4030.1		96.233.4033.1	96.233.4034.1
	5.0 m	96.233.5030.1		96.233.5033.1	96.233.5034.1
	6.0 m	96.233.6030.1		96.233.6033.1	96.233.6034.1
	7.0 m	96.233.7030.1		96.233.7033.1	96.233.7034.1
	8.0 m	96.233.8030.1		96.233.8033.1	96.233.8034.1
 Male	1.0 m				
	2.0 m				
	3.0 m				
	4.0 m				
	5.0 m				
	6.0 m				
	7.0 m				
	8.0 m				
Mains 250/400 V		Green insulation			
1, 2, ground  Female	1.0 m	96.233.1031.7		96.233.1035.7	96.233.1036.7
	2.0 m	96.233.2031.7		96.233.2035.7	96.233.2036.7
	3.0 m	96.233.3031.7		96.233.3035.7	96.233.3036.7
	4.0 m	96.233.4031.7		96.233.4035.7	96.233.4036.7
	5.0 m	96.233.5031.7		96.233.5035.7	96.233.5036.7
	6.0 m	96.233.6031.7		96.233.6035.7	96.233.6036.7
	7.0 m	96.233.7031.7		96.233.7035.7	96.233.7036.7
	8.0 m	96.233.8031.7		96.233.8035.7	96.233.8036.7
 Male	1.0 m				
	2.0 m				
	3.0 m				
	4.0 m				
	5.0 m				
	6.0 m				
	7.0 m				
	8.0 m				

¹⁾ Other cables available on request
²⁾ Other lengths available on request