
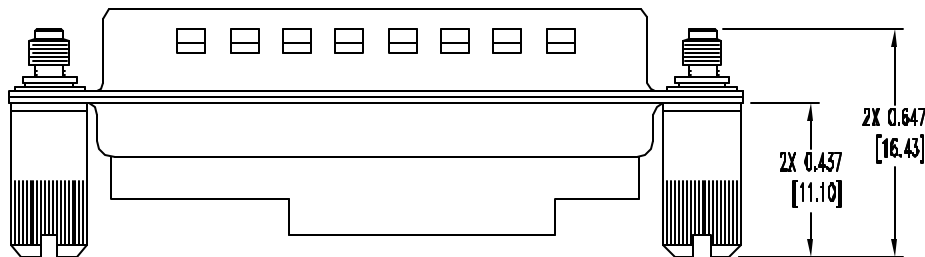
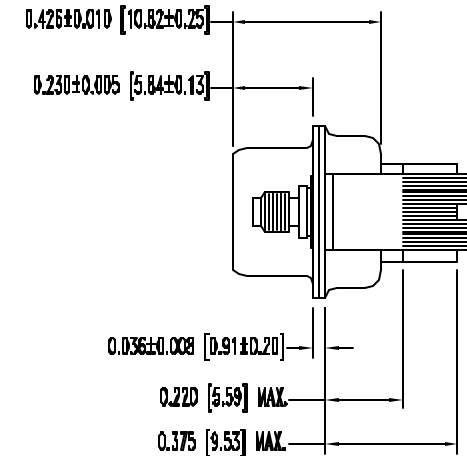


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK3944

DATE	REV	REVISION	RECORD	APP	DR	CK
10-3 01	NC	ECO	18373		ME	

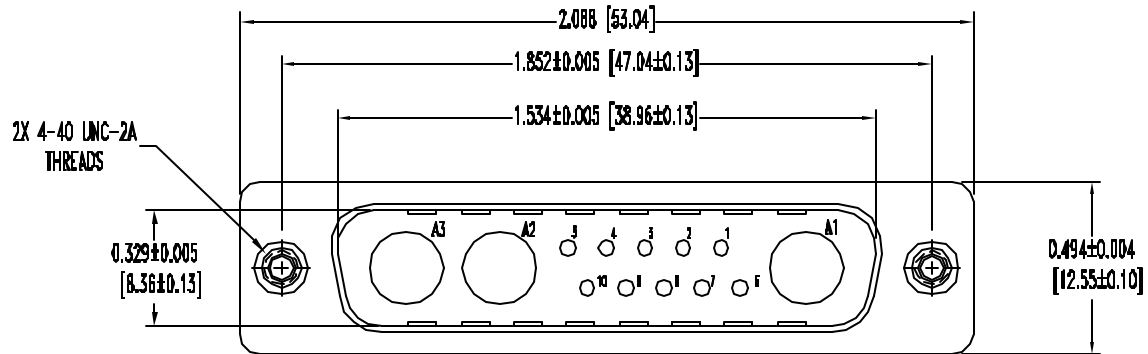

NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-W-24519, UL 94V-0, BLUE COLOR.
SHELLS: STEEL, TIN PLATED AND DIMPLED.
JACKSCREWS: STEEL WITH ZINC PLATE AND DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 V r.m.s.
- THIS MOS ALLOWS FOR THE CONNECTOR TO BE PERMANENTLY MARKED WITH P+ LOGO, POSITRONIC PART NUMBER [INCLUDING MOS] AND DATE CODE OR PER CUSTOMER PRINT.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
		N.T.S.	M. ENBA
DECIMAL TOL.	CBC SERIES	APPROVED BY	
± 0.015 [0.38]	TITLE	CBC13W3M000EZ-538.0	
WF # 4039	DATE	DRAWING NUMBER	REV.
ANGULAR TOL.	7-18-01	SK3944	NC
± 5°			