
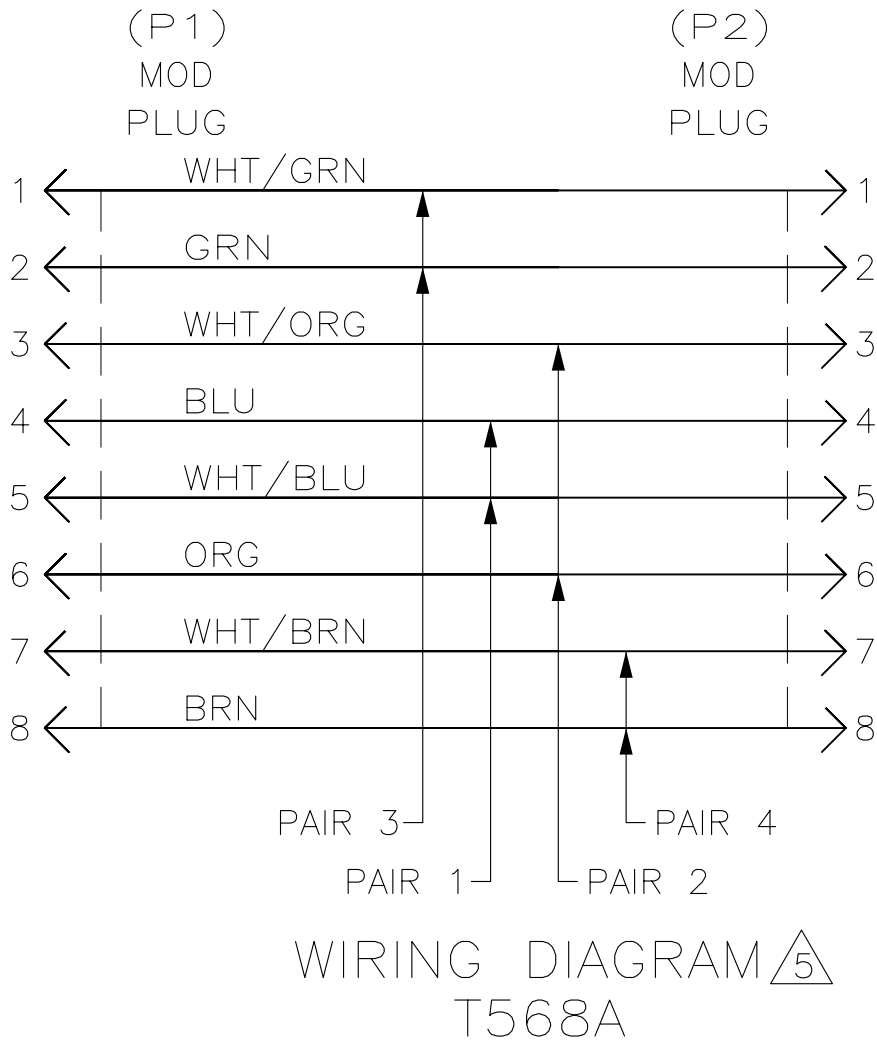


1. ONE CABLE ASSEMBLY PACKAGED IN A POLY BAG.
2. CABLE: UNSHIELDED, 24AWG, 4 TWISTED PAIRS
7/32 STRANDED CONDUCTORS, 100 OHMS.
3. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
4. DESIGNATIONS IN PARENTHESES () ARE FOR REFERENCE ONLY.
5. WIRES TO BE LACED IN MOD PLUG PER COLOR CODE IN WIRING DIAGRAM. FINAL ASSEMBLY WILL BE T568A.

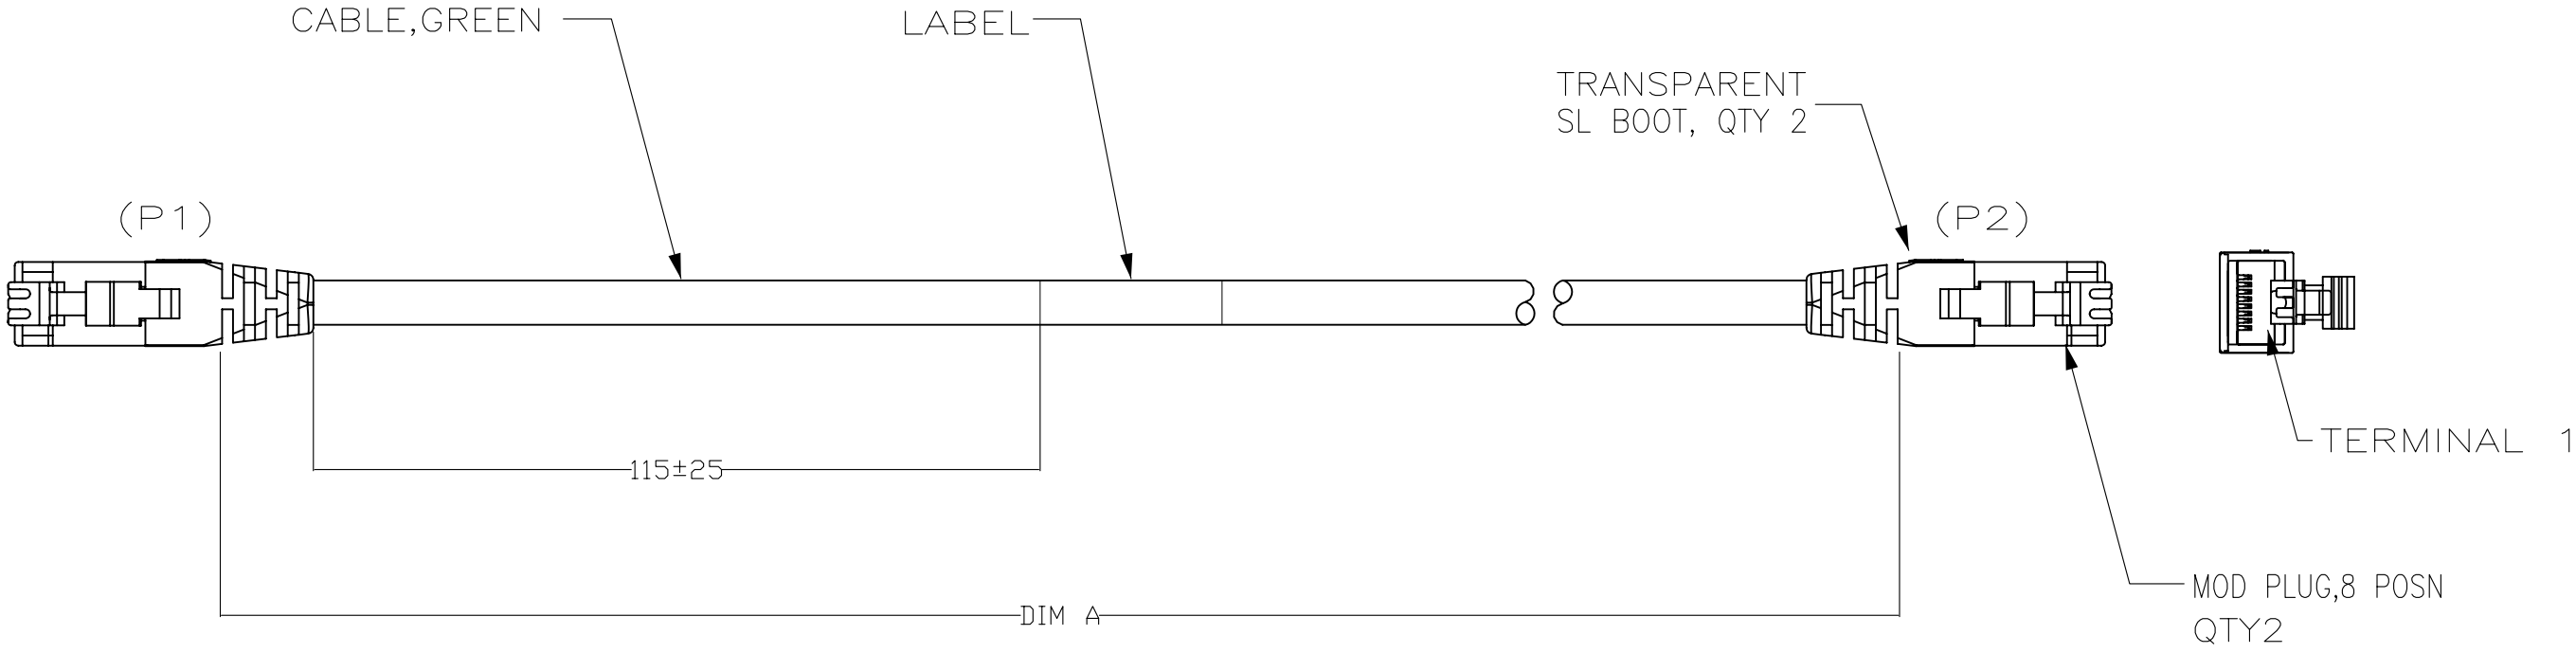

WIRING DIAGRAM 5
T568A

2-1859232-0	20050	20.0
1-1859232-5	15050	15.0
1-1859232-2	12050	12.0
1-1859232-0	10050	10.0
1859232-9	9050	9.0
1859232-8	8050	8.0
1859232-7	7050	7.0
1859232-6	6050	6.0
1859232-5	5050	5.0
1859232-4	4050	4.0
1859232-3	3050	3.0
1859232-2	2050	2.0
1859232-1	1050	1.0
PART NO	DIM A 3	METERS, REF

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RICKY CHEN 12JUN2007	Tyco Electronics Corporation Raychem, Shanghai			
		CHK RICKY CHEN 12JUN2007				
		APVD ERIC WANG 12JUN2007	NAME CABLE ASSY, CAT5E, MOD PLUG, 8 POSN, GREEN, TRANSPARENT SL BOOT			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:				
		0 PLC ± -	SIZE A2			
		1 PLC ± -	CAGE CODE 00779			
		2 PLC ± -	DRAWING NO C=1859232			
		3 PLC ± -	RESTRICTED TO -			
MATERIAL -		4 PLC ± -				
		ANGLES ± -				
		FINISH -				
CUSTOMER DRAWING			SCALE -	SHEET 1 of 1	REV A	