


L 207 200 Power connectors

► Expert Range - Screw clamp connection

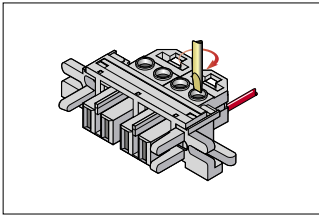


Female plug.

Body : UL94 V0 - PC

Modular mounting (panel or through panel mounting).

Grey

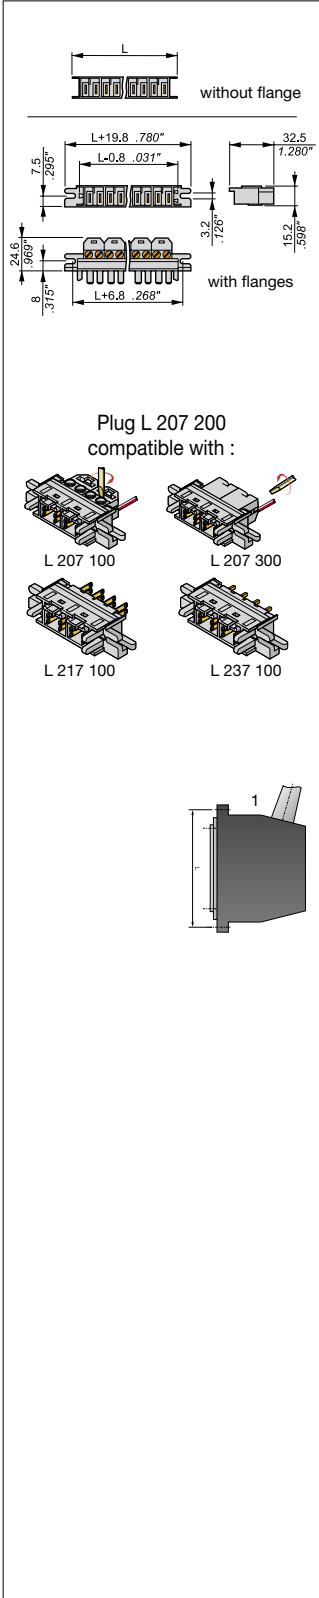

4 mm² - Spacing 7.62 mm .300"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
Without flange :				
4	0.0191	30	39.90	1SSA 207 204 R0000
6	0.0287	20	55.10	1SSA 207 206 R0000
8	0.0383	20	70.40	1SSA 207 208 R0000
Other numbers of poles, consult us				
With flanges :				
4	0.0191	30	59.70	1SSA 207 204 R3000
6	0.0287	20	74.90	1SSA 207 206 R3000
8	0.0383	20	90.20	1SSA 207 208 R3000
Other numbers of poles, consult us				

Technical data


	IEC	UL	CSA
Wire size			
Screw			
Solid wire	4 mm ²	22 - 12 AWG	20 - 12 AWG
Stranded wire	4 mm ²	22 - 12 AWG	20 - 12 AWG
With ferrule			
Rated voltage	380 V	300 V	300 V
Rated current	25 A	15 A	20 A
Short-circuit current			
Rated wire size / Gauge	4 mm ²	12 AWG	12 AWG
Storage temperature range	-20 ~ +80 °C		
Insulation resistance	≥ 10 ⁹ Ω		
Wire stripping length	10 mm / .394"		
Recommended screwdriver	3.5 mm / .138"		
Recommended torque	0.6 Nm / 5.3 lb.in		
Protection	IP 20 / NEMA 1		

Accessories

Rep.	Description	Type	Order code	L. mm	Packaging	Weight kg
1	Housing	4 poles	1SSA 299 004 R0100	50.30 mm		
	grey <input type="checkbox"/>	6 poles	1SSA 299 004 R0200	65.50 mm		
	grey <input type="checkbox"/>	8 poles	1SSA 299 004 R0300	80.80 mm		

Other versions, please consult us :

Female plug. Wire Wrapping.



L 227 200

