

L 217 200 Power connectors

► Expert Range - Quick-connect connection




Female plug.

Modular mounting (panel or through panel mounting).

Body : UL94 V0 - PC

Grey




Spacing 7.62 mm .300"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
Without flange :				
4	0.0111	20	39.90	1SSA 217 204 R0000
6	0.0167	20	55.10	1SSA 217 206 R0000
8	0.0223	20	70.40	1SSA 217 208 R0000
Other numbers of poles, consult us				
With flanges :				
4	0.0133	20	59.70	1SSA 217 204 R3000
6	0.0189	20	74.90	1SSA 217 206 R3000
8	0.0245	20	90.20	1SSA 217 208 R3000
Other numbers of poles, consult us				

Technical data

	IEC	UL	CSA
Wire size			
Quick-connect		2.86 x 0.8 mm 6.30 x 0.8 mm	
Rated voltage	380 V	300 V	300 V
Rated current	25 A	15 A	20 A
Short-circuit current			
Rated wire size / Gauge			
Storage temperature range		-20 ~ +80 °C	
Insulation resistance		≥ 10 ⁹ Ω	
Wire stripping length			
Recommended screwdriver			
Recommended torque			
Protection			

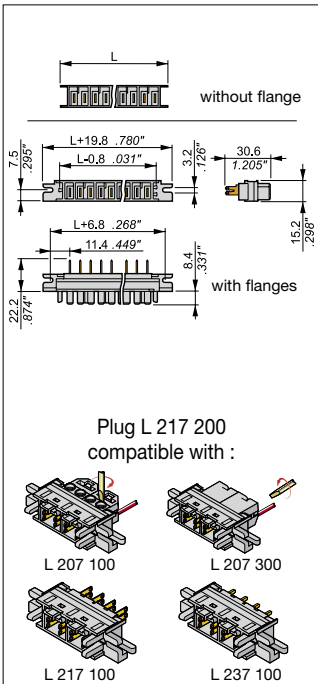


Accessories

Rep.	Description	Type	Order code	L. mm	Packaging	Weight kg
1	Housing	grey	4 poles	1SSA 299 004 R0100	50.30 mm	
		grey	6 poles	1SSA 299 004 R0200	65.50 mm	
		grey	8 poles	1SSA 299 004 R0300	80.80 mm	

Other versions, please consult us :

Female plug. Wire Wrapping.



L 227 200

