



3731130 0001916 2

FEATURES

2 Pole-Pair Bandpass Models with Butterworth Transfer Characteristics, featuring:

- Digitally Programmable Corner Frequency via CMOS Interface Logic
- Internally Latched Control Lines to Store Frequency Selection Data
- Most Widely Used Transfer Characteristics for Broadest Application Scope
- Plug-in Ready-to-Use Fully Finished Filter Component

APPLICATIONS

T-64-05

- Programmable Automatic Test Equipment (A.T.E.) Systems
- Production Test Systems
- Industrial Process Control
- Programmable Comb Filtering
- Frequency Spectrum Analysis
- Vibration Analysis

25E D

FREQUENCY DEVICES INC

GENERAL DESCRIPTION

The **864 Series** are digitally-programmable bandpass active filters that are tunable over a 256:1 frequency range. These units contain 8-bit CMOS clocked "D" latches which can be digitally configured to operate in any of three modes:

- Transfer frequency control input data into the latches on the STROBE (or CLOCK) rising edge.
- As above, but on the STROBE falling edge.
- Follow the tuning input data, in a non-latching transparent mode.

Twenty two models offer a selection of 2 pole-pair bandpass responses with Butterworth transfer characteristics. The

choices include a Q of 1, 2, 5, 10 or 20, plus any single tuning listed below:

- 1 Versions: 0.1Hz to 25.6Hz
- 2 Versions: 1.0Hz to 256Hz
- 3 Versions: 10Hz to 2560Hz
- 4 Versions: 100Hz to 25.6kHz
- 5 Versions: 200Hz to 51.2kHz

All **864 Series** models are fully finished filters which require no external components or adjustments, and operate from non-critical ± 12 to $\pm 18V$ power supplies. A 20K Ω input impedance and a 10 Ω (max.) output impedance make these compact (2.0"W x 4.0"L footprint, by 0.4"H or 0.6"H) encapsulated plug-in modules convenient and easy to use.

CONDENSED FREQUENCY SELECTION TABLE

MSB	---	---	---	---	---	---	LSB	< - Bit Weight
27	26	25	24	23	22	21	20	Corner Frequency (fc)
D ₇	D ₆	D ₅	D ₄	D ₃	D ₂	D ₁	D ₀	
0	0	0	0	0	0	0	0	fmax/256
0	0	0	0	0	0	1	1	fmax/64
0	0	0	0	1	1	1	1	fmax/16
0	1	1	1	1	1	1	1	fmax/2
1	1	1	1	1	1	1	1	fmax

Five of the possible 256 frequency selection codes.

Frequency 25 Haverhill,
Devices Locust Massachusetts
Incorporated Street 01832

(508) 374-0761
FAX
(508) 521-1839



25E D ■ 3731130 0001917 4 ■

FREQUENCY DEVICES INC T-64-05

ANALOG SPECIFICATIONS (Typical @ 25°C & ±15Vdc unless otherwise noted)
RESPONSE CHARACTERISTICS

Gain @ f_0 (Non-inverting)	$0 \pm 0.2\text{dB}$
Gain @ Specific Frequencies	
@ f_1 (-3dB), f_h (-3dB)	$-3 \pm 0.5\text{dB}$
@ f_1 (-40dB), f_h (-40dB)	$-40 \pm 2\text{dB}$
Tuning Characteristics	
Programming Range	$F_{\text{max}}/256 \text{ to } F_{\text{max}}$
Step Size (Resolution)	$F_{\text{max}}/256$
Stability	$\pm 0.01\%/^{\circ}\text{C}$

ATTENUATION CHARACTERISTICS

Gain vs. Frequency Plot	See Figures 1, 2, 3, 4
Gain, Phase and Delay Data	See Tables 1, 2

ANALOG INPUT CHARACTERISTICS

Impedance	$20\text{K}\Omega$
Voltage Range	$\pm 10\text{V}$
Maximum Safe Voltage	$\pm V_s$

ANALOG OUTPUT CHARACTERISTICS

Resistance	$10\Omega \text{ max.}$
Linear Operating Range	$\pm 10\text{V}$
Maximum Current	$\pm 2\text{mA}$
Offset Voltage	$2\text{mV typ., } 20\text{mV max.}$
Offset vs. Temperature	See discussion, next page.
Noise	$50\mu\text{V RMS}$

POWER SUPPLY ($\pm V_s$)

Rated Voltage	$\pm 15\text{Vdc}$
Operating Range	$\pm 12 \text{ to } \pm 18\text{Vdc}$
Maximum Safe Voltage	$\pm 18\text{Vdc}$
Quiescent Current	20mA max.

TEMPERATURE

Operating	$0^{\circ}\text{C to } +70^{\circ}\text{C}$
Storage	$-25^{\circ}\text{C to } +85^{\circ}\text{C}$

- Notes:**
1. Input and output signal voltages are referenced to supply common.
 2. Output is short circuit protected to common. DO NOT CONNECT TO $\pm V_s$.
 3. Measured in a 5Hz to 50kHz bandwidth.

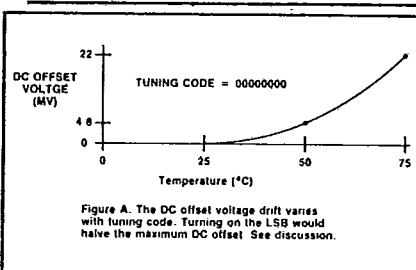


3731130 0001918 6

DC OFFSET vs. TEMPERATURE

The DC offset voltage of 864 Series filters originates at two internal sources that cause it to vary with temperature and selected frequency. Slight mismatches between operational amplifier (op amp) semiconductor junctions create the first source of DC offset. Switching element leakage currents flowing through switch-selected tuning resistors predominate as the second source of DC offset. Though small at 25°C, the switch leakage currents increase exponentially with absolute temperature to become significantly large at higher temperatures. This becomes a problem when the filter is tuned to low frequencies, which require high-value tuning resistors.

Figure A illustrates the worst case temperature behavior of the offset voltage; this improves with higher frequency codes. The maximum DC offset voltage will generally occur at the highest temperature and the lowest corner frequency (all "0" input code). This recommends the user to select the model with the LOWEST CORNER FREQUENCY possible.



USER NOTES

Grounding: To achieve specified precision, all analog and digital grounds are connected internal to the filter. Should this cause a problem, all digital inputs (C, P, and D₀-D₇) can be optically isolated.

Settling Time: When tuned to a different frequency, a filter requires sufficient transient settling time corresponding to several cycles of the new frequency. PLEASE NOTE: DO NOT use these filters in frequency scanning applications without considering settling time.

DATA CONTROL CHARACTERISTICS

Data Control Lines		
Functions	Latch Strobe (C)	Transition Polarity (P)
Data Control Modes		
Mode 1	P = 0; C = 0	frequency follows input codes
	P = 0; C = 0 → 1	frequency latched on rising edge
Mode 2	P = 1; C = 1	frequency follows input codes
	P = 1; C = 1 → 0	frequency latched on falling edge
INPUT DATA LEVELS (CMOS Logic)		
Input Voltage	Min.	Max. Acceptable
(V _s = 15V)		
Low Level In	0 Volts	4 Volts
High Level In	11 Volts	15 Volts
Input Current	Typ.	Max.
High Level In	-10 ⁻⁵ μA	-1 μA
Low Level In	+10 ⁻⁵ μA	+1 μA
Input Capacitance	5pF	7.5pf
Latch Response		
Data Set Up Time ¹	25 ns	—
Data Hold Time ²	50 ns	—
Strobe		
Min Pulse Width	80 ns	—

Notes: 1. The time data must be present before occurrence of strobe edge.
2. The time data must be present after occurrence of strobe edge.

Frequency 25 Haverhill, (508) 374-0761
Devices Locust Massachusetts FAX
Incorporated Street 01832 (508) 521-1839



25E D ■ 3731130 0001919 8 ■ T-64-05

DIGITAL TUNING CHARACTERISTICS

The digital tuning interface circuits are two 4042 quad CMOS latches which accept the following CMOS-compatible inputs: eight tuning bits ($D_0 - D_7$), a latch strobe bit (C), and a transition polarity bit (P).

FREQUENCY DEVICES INC

Filter tuning follows the tuning equation given below:

$$f_c = (f_{\max}/256) [1 + D_7 \cdot 2^7 + D_6 \cdot 2^6 + D_5 \cdot 2^5 + D_4 \cdot 2^4 + D_3 \cdot 2^3 + D_2 \cdot 2^2 + D_1 \cdot 2^1 + D_0 \cdot 2^0]$$

where $D_0 - D_7$ = Logic "0" or "1", and

$f_{\max}$ = maximum tunable frequency

f_c = center frequency

Minimum tunable frequency = $f_{\max}/256$ ($D_0 - D_7 = 0$)

Minimum frequency step (Resolution) = $f_{\max}/256$

INPUT DATA FORMAT
Frequency Select Bits

Positive Logic Logic "1" = +Vs
 Logic "0" = Gnd Logic threshold typ. = 0.45Vs

Bit Weighting D_0 = least significant bit (LSB)
 (Binary-Coded) D_7 = most significant bit (MSB)

Frequency Range 256:1, Binary Weighted

DIGITAL FREQUENCY SELECTION

Nine of the 256 possible frequency selection codes

MSB	---	---	---	---	---	---	LSB	< - Bit Weight
27	26	25	24	23	22	21	20	Corner Frequency (f_c)
D_7	D_6	D_5	D_4	D_3	D_2	D_1	D_0	
0	0	0	0	0	0	0	0	$f_{\max}/256$
0	0	0	0	0	0	0	1	$f_{\max}/128$
0	0	0	0	0	0	1	1	$f_{\max}/64$
0	0	0	0	0	1	1	1	$f_{\max}/32$
0	0	0	0	1	1	1	1	$f_{\max}/16$
0	0	0	1	1	1	1	1	$f_{\max}/8$
0	0	1	1	1	1	1	1	$f_{\max}/4$
0	1	1	1	1	1	1	1	$f_{\max}/2$
1	1	1	1	1	1	1	1	$f_{\max}$

Frequency 25 Haverhill,
 Devices Locust Massachusetts
 Incorporated Street 01832

(508) 374-0761
 FAX
 (508) 521-1839



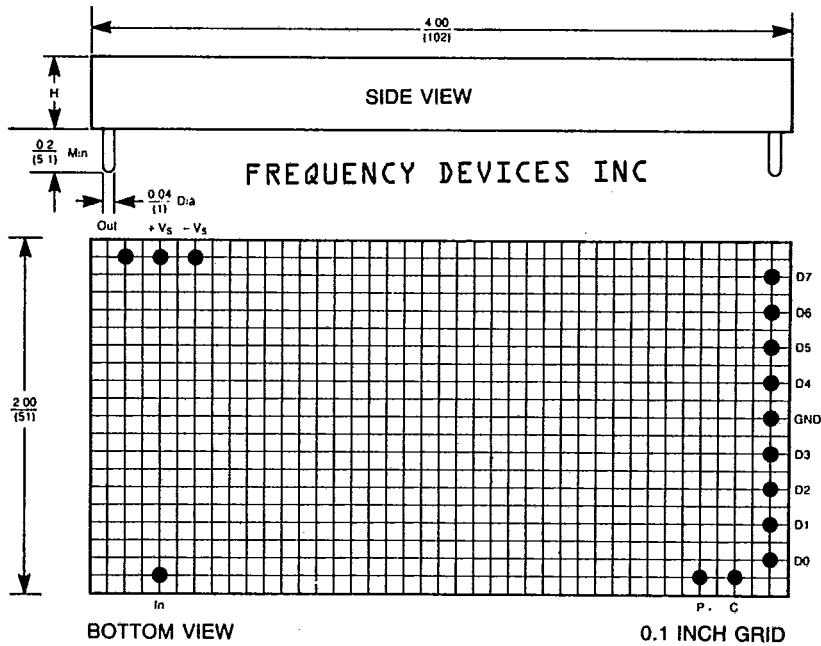
**FREQUENCY
DEVICES**

864 SERIES *T-64-05*
PACKAGE AND PIN-OUT DATA

177

25E D ■ 3731130 0001920 4 ■

**PACKAGE AND PIN-OUT DATA
DIMENSIONS
IN INCHES (MM)**



CASE DIMENSIONS. ALL 864 SERIES MODELS

CASE	DIMENSIONS IN INCHES AND (MM)
M-1	2.0"W x 4.0"L x 0.4"H (51 x 102 x 10 mm)
M-2	2.0"W x 4.0"L x 0.6"H (51 x 102 x 15 mm)

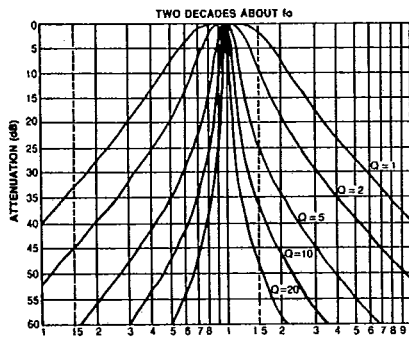
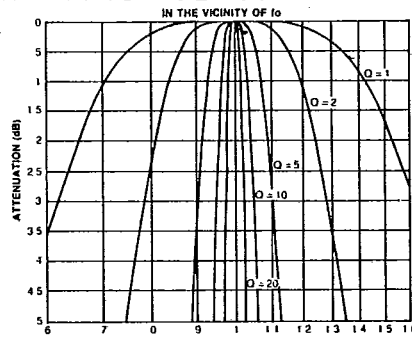
TERMINAL KEY

In	Analog Input Signal	D ₀	Tuning Bit 0 (LSB)
Out	Analog Output Signal	D ₁	Tuning Bit 1
GND	Power and Signal Return	D ₂	Tuning Bit 2
"P"	Transition Polarity Bit	D ₃	Tuning Bit 3
"C"	Tuning Strobe Bit	D ₄	Tuning Bit 4
+Vs	Supply Voltage, Positive	D ₅	Tuning Bit 5
-Vs	Supply Voltage, Negative	D ₆	Tuning Bit 6
		D ₇	Tuning Bit 7 (MSB)

Frequency 25 Haverhill,
Devices Locust Massachusetts
Incorporated Street 01832

(508) 374-0761
FAX
(508) 521-1839

177


**FREQUENCY
DEVICES**
**864 SERIES T-64-05
THEORETICAL BANDPASS
AMPLITUDE RESPONSE**
25E D 3731130 0001921 6
AMPLITUDE RESPONSE CURVES..
FREQUENCY DEVICES INC

FIGURE 1 NORMALIZED FREQUENCY (f/f_0)

FIGURE 2 NORMALIZED FREQUENCY (f/f_0)
**NORMALIZED THEORETICAL
AMPLITUDE DATA**

Q ->	Q = 1		Q = 2		Q = 5		Q = 10		Q = 20	
AMP. (dB)	$f < f_0 < f$		$f < f_0 < f$		$f < f_0 < f$		$f < f_0 < f$		$f < f_0 < f$	
	f/f_0	f_0/f	f/f_0	f_0/f	f/f_0	f_0/f	f/f_0	f_0/f	f/f_0	f_0/f
0.5	0.75	1.34	0.86	1.16	0.94	1.06	0.97	1.03	0.99	1.02
1.0	0.71	1.42	0.84	1.19	0.93	1.07	0.97	1.04	0.98	1.02
1.5	0.67	1.48	0.82	1.22	0.92	1.08	0.96	1.04	0.98	1.02
2.0	0.65	1.53	0.81	1.24	0.92	1.09	0.96	1.05	0.98	1.02
2.5	0.64	1.57	0.79	1.26	0.91	1.10	0.95	1.05	0.98	1.02
3.0	0.62	1.62	0.78	1.28	0.91	1.10	0.95	1.05	0.98	1.03
5.0	0.56	1.78	0.74	1.35	0.89	1.13	0.94	1.06	0.97	1.03
10.0	0.46	2.19	0.66	1.52	0.84	1.19	0.92	1.09	0.96	1.04
15.0	0.37	2.72	0.57	1.75	0.79	1.26	0.89	1.13	0.94	1.06
20.0	0.29	3.45	0.49	2.06	0.73	1.36	0.89	1.17	0.92	1.08
25.0	0.23	4.44	0.40	2.51	0.66	1.51	0.81	1.23	0.90	1.11
30.0	0.17	5.80	0.32	3.13	0.59	1.71	0.76	1.32	0.87	1.15
35.0	0.13	7.63	0.25	4.00	0.50	2.00	0.69	1.44	0.83	1.21
40.0	0.10	10.1	0.19	5.19	0.41	2.41	0.62	1.62	0.78	1.28
45.0	0.08	13.4	0.15	6.13	0.33	3.00	0.54	1.87	0.72	1.39
50.0	0.06	17.3	0.11	9.00	0.26	3.82	0.45	2.23	0.65	1.54

Frequency 25 Haverhill,
Devices Locust Massachusetts
Incorporated Street 01832

(508) 374-0761
FAX
(508) 521-1839



25E D ■ 3731130 0001922 8 ■

PHASE RESPONSE CURVES.. T-64-05

FREQUENCY DEVICES INC

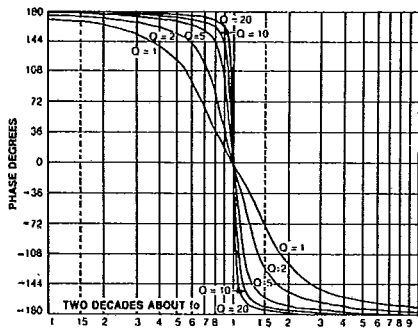


FIGURE 3 NORMALIZED FREQUENCY (f/f₀)

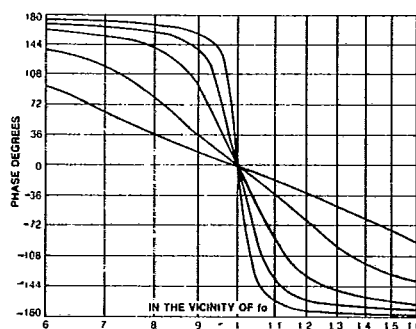


FIGURE 4 NORMALIZED FREQUENCY (f/f₀)

NORMALIZED THEORETICAL
PHASE RESPONSE DATA

PHASE ANGLE (deg)	Q = 1		Q = 2		Q = 5		Q = 10		Q = 20	
	f < f ₀ < f		f < f ₀ < f		f < f ₀ < f		f < f ₀ < f		f < f ₀ < f	
POL-<	(-)	(+)	(-)	(+)	(-)	(+)	(-)	(+)	(-)	(+)
MAG.	f/f ₀	f ₀ /f	f/f ₀	f ₀ /f	f/f ₀	f ₀ /f	f/f ₀	f ₀ /f	f/f ₀	f ₀ /f
5	0.97	1.03	0.99	1.02	0.99	1.01	0.10	1.00	1.00	1.00
10	0.94	1.06	0.97	1.03	0.99	1.01	0.99	1.01	1.00	1.00
15	0.91	1.10	0.96	1.05	0.98	1.02	0.99	1.01	1.00	1.01
30	0.84	1.19	0.92	1.09	0.97	1.04	0.98	1.02	0.99	1.01
45	0.77	1.29	0.89	1.14	0.95	1.05	0.97	1.03	0.99	1.01
60	0.72	1.39	0.85	1.18	0.94	1.07	0.97	1.03	0.98	1.02
75	0.67	1.50	0.81	1.23	0.92	1.09	0.96	1.04	0.98	1.02
90	0.62	1.62	0.78	1.28	0.91	1.11	0.95	1.05	0.98	1.03
105	0.56	1.77	0.74	1.35	0.89	1.13	0.94	1.06	0.97	1.03
120	0.50	1.99	0.70	1.44	0.86	1.16	0.93	1.08	0.96	1.04
135	0.42	2.36	0.63	1.59	0.83	1.21	0.91	1.10	0.95	1.05
150	0.32	3.13	0.52	1.92	0.76	1.39	0.89	1.15	0.93	1.07
165	0.18	5.64	0.33	3.06	0.59	1.69	0.76	1.31	0.87	1.15
180	0	∞	0	∞	0	∞	0	∞	0	∞



25E D ■ 3731130 0001923 T ■

FREQUENCY DEVICES INC
AVAILABLE 864 SERIES BANDPASS MODELS
T-64-05

FREQ	TUNING RANGE				
	0.1Hz to 25.6Hz	1.0Hz to 256Hz	10Hz to 2.56kHz	100Hz to 25.6kHz	200Hz to 51.2kHz
	MINIMUM TUNABLE STEP (RESOLUTION)				
	0.1Hz	1.0Hz	10Hz	100Hz	200Hz
CASE	M-1	M-2	M-2	M-2	M-2
"Q"	MODELS				
Q = 1	864P8BQ1-1	864P8BQ1-2	864P8BQ1-3	864P8BQ1-4	864P8BQ1-5
Q = 2	864P8BQ2-1	864P8BQ2-2	864P8BQ2-3	864P8BQ2-4	864P8BQ2-5
Q = 5	864P8BQ5-1	864P8BQ5-2	864P8BQ5-3	864P8BQ5-4	864P8BQ5-5
Q = 10	864P8BQ10-1	864P8BQ10-2	864P8BQ10-3	864P8BQ10-4	—
Q = 20	864P8BQ20-1	864P8BQ20-2	864P8BQ20-3	---	---

TRANSFER CHARACTERISTICS APPEAR IN TABLES ON PAGES 178, 179.

HOW TO ORDER

The AVAILABLE MODELS table above lists the twenty two **864 Series** models and the features that distinguish each model from the other. Selection is the simple matter of choosing the filter model with the frequency response, range and resolution required by the application. NOTE: FOR LOWEST DC OFFSET AND BEST FILTER PERFORMANCE, SELECT THE LOWEST FREQUENCY MODEL THAT SPANS THE BANDWIDTH OF INTEREST.

 Frequency 25 Haverhill,
 Devices Locust Massachusetts
 Incorporated Street 01832

 (508) 374-0761
 FAX
 (508) 521-1839