

Product Specifications



C085NFPM

Type N Female Panel Mount for 0.085 in CF085-50 cable

CHARACTERISTICS

General Specifications

Interface	N Female
Body Style	Panel mount
Mounting Angle	Straight

Electrical Specifications


Connector Impedance	50 ohm
Operating Frequency Band	0 – 6000 MHz
Cable Impedance	50 ohm
3rd Order IMD	-112 dBm @ 910 MHz
3rd Order IMD Test Method	Two +43 dBm Carriers
RF Operating Voltage, maximum (vrms)	671.00 V
dc Test Voltage	1900 V
Outer Contact Resistance	0.25 mOhm
Inner Contact Resistance	1.00 mOhm
Insulation Resistance, minimum	5000 MOhm
Average Power	0.2 kW @ 900 MHz
Peak Power, maximum	0.21 kW
Shielding Effectiveness	-100 dB

Product Specifications

C085NFPM



Outline Drawing

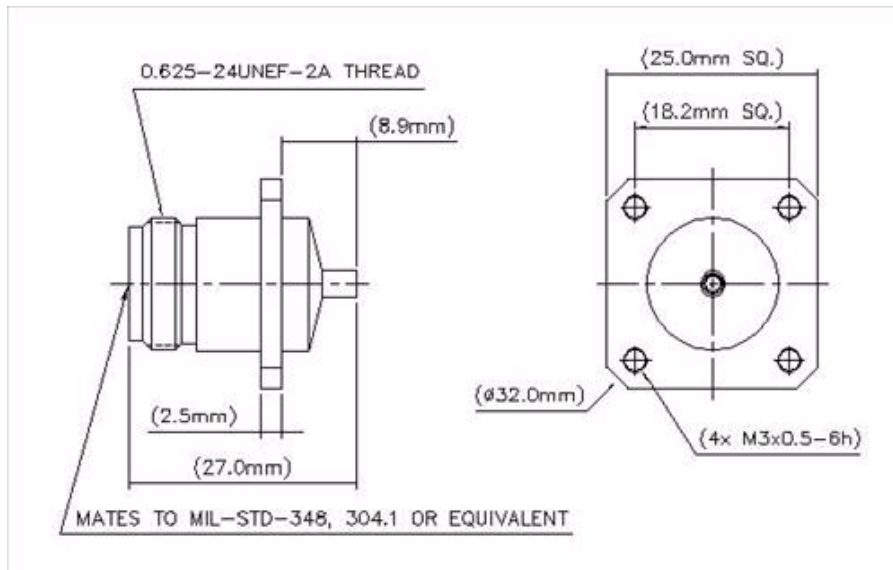

Mechanical Specifications

Outer Contact Attachment Method	Solder
Inner Contact Attachment Method	Solder
Outer Contact Plating	Trimetal
Inner Contact Plating	Gold
Interface Durability	500 cycles
Interface Durability Method	IEC 169-4:17
Insertion Force	124.55 N 28.00 lbf
Insertion Force Method	IEC 169-16:9.3.5
Pressurizable	No

Dimensions

Diameter, maximum	25.00 mm 0.98 in
Height	32.00 mm 1.26 in
Length	27.00 mm 1.06 in
Weight	0.85 g 0.00 lb
Width	32.00 mm 1.26 in

Environmental Specifications

Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)
-----------------------	--------------------------------------

Product Specifications

CO85NFPM



Storage Temperature	-65 °C to +125 °C (-85 °F to +257 °F)
Immersion Depth	1 m
Immersion Test Mating	Mated
Immersion Test Method	IEC 60529:2001, IP68
Moisture Resistance Test Method	IEC 60068-2-3
Mechanical Shock Test Method	IEC 60068-2-27
Thermal Shock Test Method	IEC 60068-2-14
Vibration Test Method	IEC 60068-2-6
Corrosion Test Method	IEC 60068-2-11

Standard Conditions

Attenuation, Ambient Temperature	20 °C 68 °F
Average Power, Ambient Temperature	40 °C 104 °F
Average Power, Inner Conductor Temperature	100 °C 212 °F

Return Loss

Frequency Band	VSWR	Return Loss (dB)
824–2700 MHz	1.05	32.00
3000–6000 MHz	1.09	27.00

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)



* Footnotes

Immersion Depth	Immersion at specified depth for 24 hours
-----------------	---