

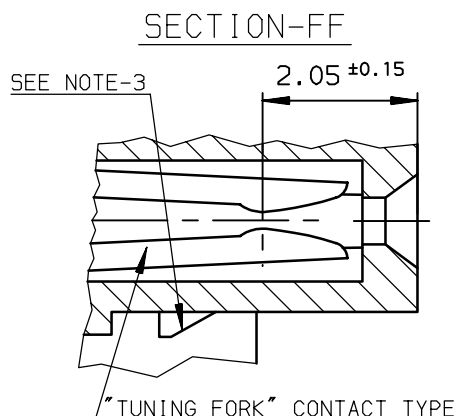
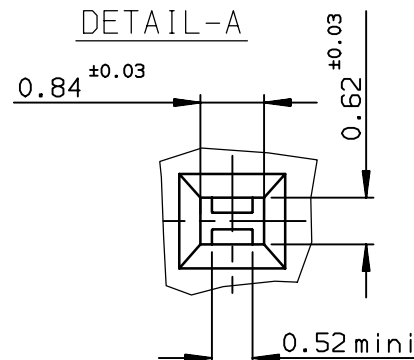
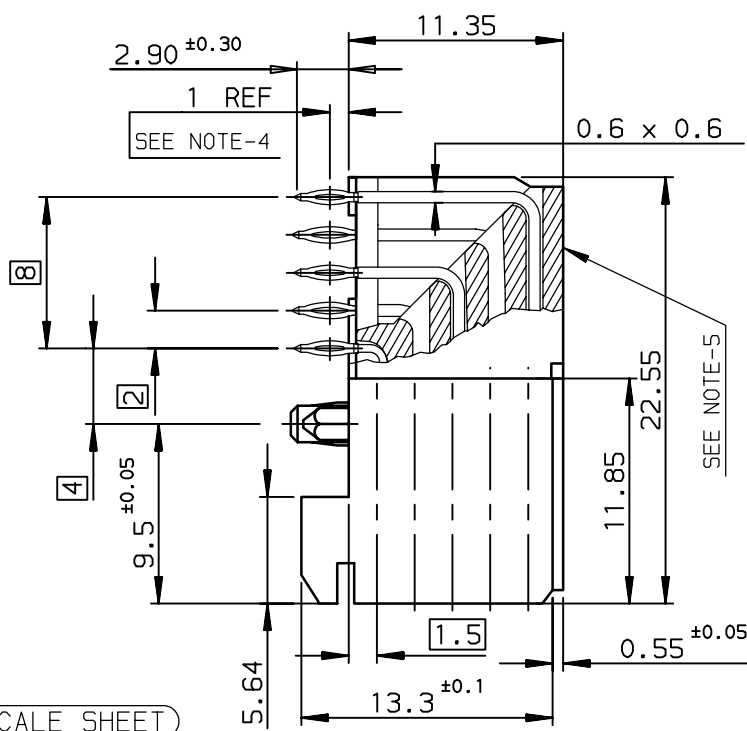
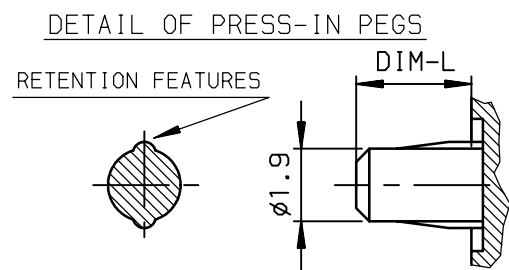


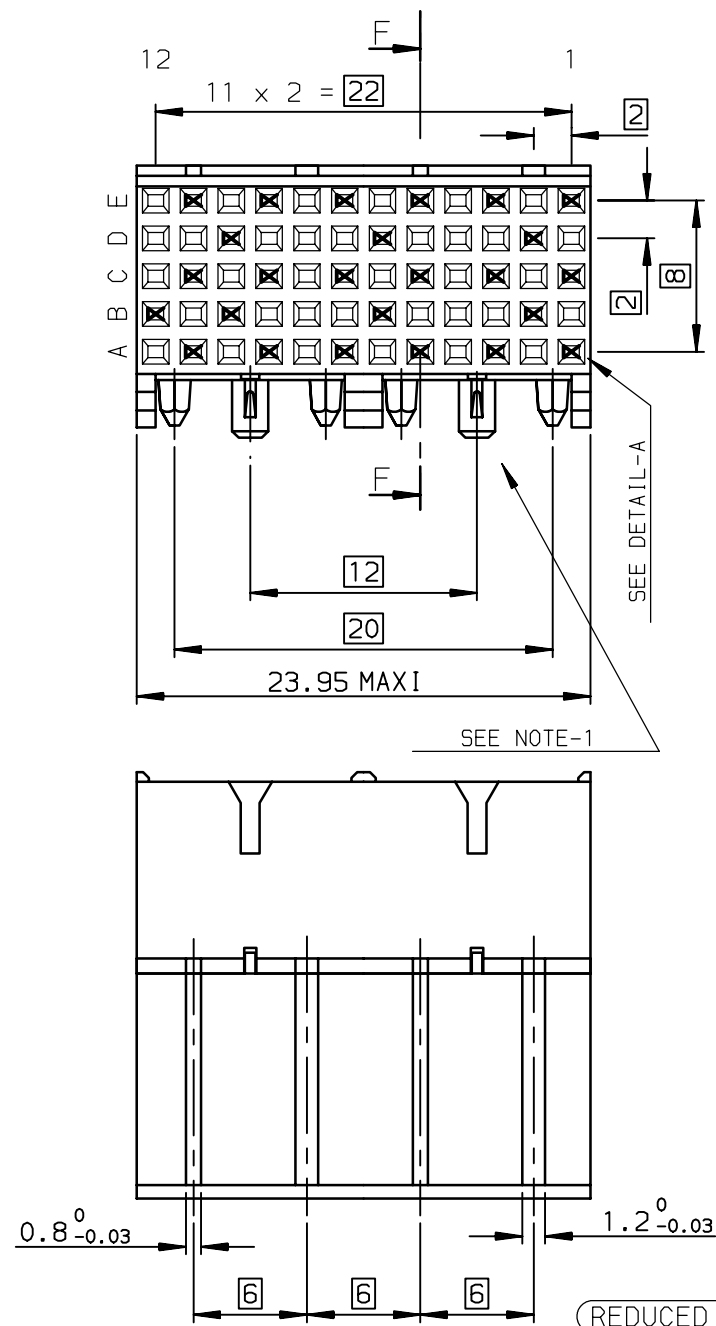

LAYOUT FOR P.C.B

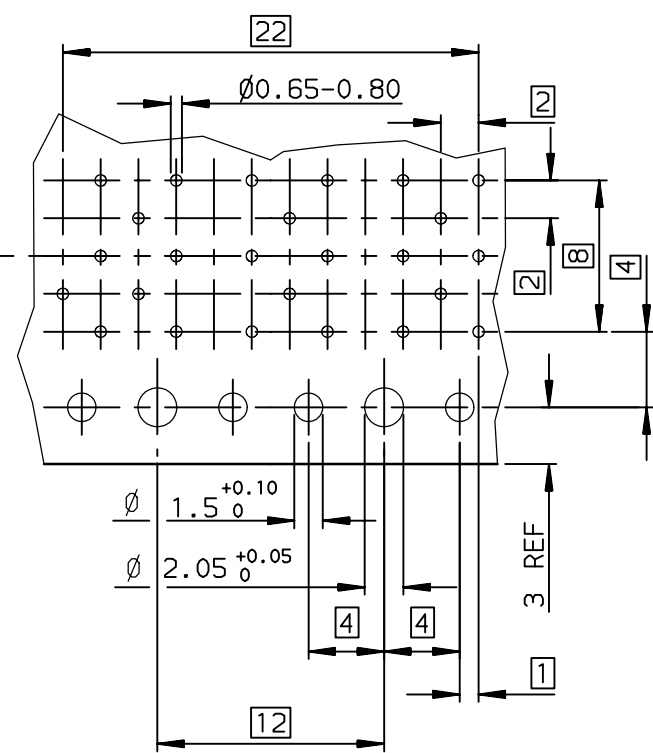

SPECIFIC DATAS

SELECTIVE CONTACT LOADING: CONTACT IN A1-A3-A5-A7-A9-A11
CONTACT IN B2-B6-B10-B12
CONTACT IN C1-C3-C5-C7-C9-C11
CONTACT IN D2-D6-D10
CONTACT IN E1-E3-E5-E7-E9-E11

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8626-000P

NOTE-1: PRESS-IN RETENTION PEG

PERFORMANCE LEVEL = PL1 OF IEC-48B/424/CDV SPECIFICATION

NOTE-3: PLUG FOR CODING KEY FIXING

NOTE-4: EYE OF THE NEEDLE PRESS-FIT CTS TYPE

NOTE-5: FLAT ROCK INSERTION TOOLING IN PCB,SEE DRW C-8626-1003

TIN LEAD PART NUMBER

Part Number: HM1F52FDP395H6P

LEAD FREE PART NUMBER

Part Number: HM1F52FDP395H6PLF

European Views

rev	ecn no	dr	date
A	-	-	2000/03/13
B	LS05-004	MLE	2005/02/21
C	LS06-0095	LGO	2006/07/19
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 	 mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ETIEMBRE	2000/03/13	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2.5	
Eng	LENOIR	2000/03/13			0.XX	±0.1			
Chr	LEGARE	2000/03/13			0.XXX	±0.1			
Appr	LEGARE	2000/03/13	0.XX' ±2'		0.XXX	±0.1	ECN	LS06-0095	
			Product family				METRAL	Spec ref -	
			title HM1 FEMALE 5 ROW -25 CONTACTS R.A PRESS-FIT,SPECIFIC				dwg no C-8626-11062		Rev. C
			catalog no		-	CUSTOMER		sheet 1 of 1	