

2.54mm (0.1")


Flexible Printed Circuits Connector (Straight & Right Angle) 2241 Series

APPLICATION AND FEATURES

1. Compact and low profile design for saving space.
2. High reliable contact with low insertion force.
3. Straight and right angle type facilitate engineering design.
4. Mate with Flexible Printed Circuit.
5. 04 to 31 contacts

SPECIFICATIONS

Current Rating:	1 Amps
Insulator resistance:	5000 Megohms Min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0

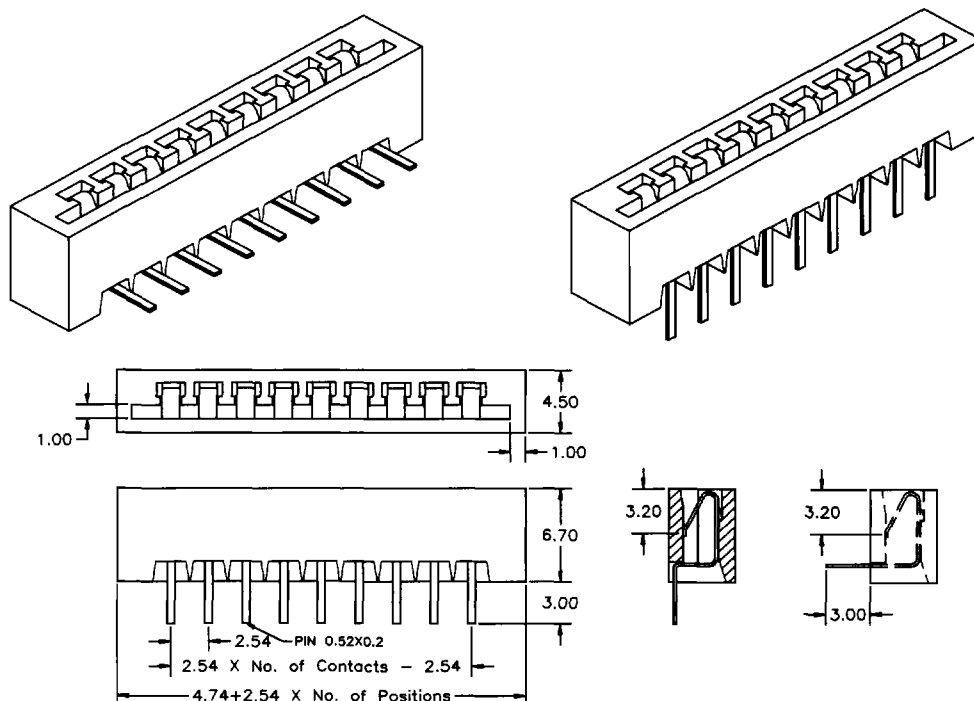

Order Information 2241 Series

Example: 2241-21-S-01

Series No.	Number of Contacts	Connector Type	Contact Plating
		Straight	Tin Plated
		Right Angle	

Recommended P.C.Board
Hole Layout

