



# 2682-6460-XX

## 26.5 GHz SMA Hex/Round Attenuator

### Specifications


#### Electrical:

Freq. Range:	DC-26.5 GHz
VSWR:	
DC-18 GHz	1.35:1 Max
18-26.5 GHz	1.50:1 Max
Power (Ave):	2 Watts @ 25 Deg. C
Power (Peak):	500 Watts
Impedance	50 Ohms
Operating Temp Range	-55 to +125 °C

#### Mechanical:

Size	Length (0-12dB)	.86"
	(13-30 dB)	1.02"
Body Dia:	.28"/.312 Hex Nut	
Connector & Body	Passivated Stainless Steel	
Center Conductor	Gold Plated Beryllium Copper	

### Outline Drawing

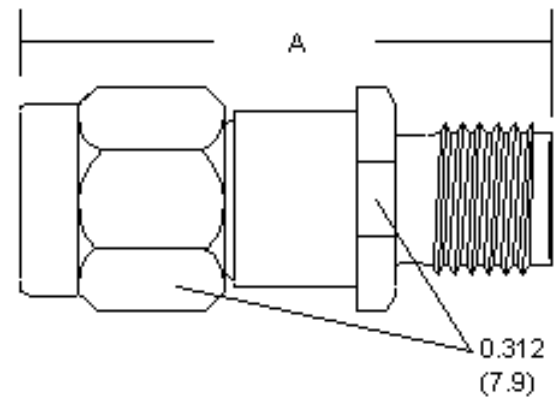

A = 0.86" (00-12 dB)  
A = 1.02" (13-30 dB)

### Ordering Guide

Part Number Format: 2682-6460-XX  
XX = 00-12, 15, 20, 30 dB. Other dB Values available upon request.  
Add letter U to end of part number for unmarked parts

Rev: A0 112606DC

# WHEN PERFORMANCE MATTERS