







defining a degree of excellence


V.34 SRF. MNT. MODEM TRANSFORMERS S574-1000-17 and S574-1000-18

TM0053


MECHANICALS

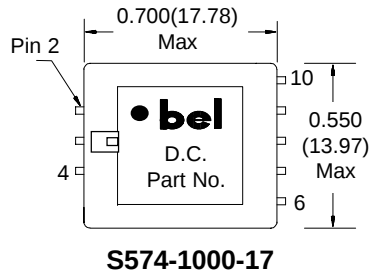

SCHEMATIC



SUGGESTED PC BOARD LAYOUT





ELECTRICALS

SPECIFICATIONS		UNITS
Suitable for modem speeds up to:	V.34	--
Reflects 600 ohm at Pri with R_{Load}	340	ohms
D.C. Resistance, 20°C, +/- 10%, Pri	120	ohms
D.C. Resistance, 20°C, +/- 10%, Sec	145	ohms
Frequency Response, 100 to 4000Hz	+/- 0.2	dB
Insertion Loss at 1KHz, 20°C	2.5 Max	dB
Return Loss vs 600 ohms at 1KHz	37 Typ	dB
Direct Current	None	--
Dielectric Test Pri-Sec, Pri to core	1250	VAC
Direct Current	None	--
Turns Ratio (Pri-Sec) 1KHz, +/- 1%	1:1	--
Longitudinal Balance 60 to 1000Hz	70 Min	dB
Longitudinal Balance 1000 to 4000Hz	60 Min	dB
Total Harmonic Distortion 600Hz @ -10dBm	-86 Max	dB

TYPICAL DISTORTION FIGURES (T.H.D.)

PART NUMBER	Ref	100 Hz	150 Hz	200 Hz	250 Hz	300 Hz	600 Hz
S574-1000-17	-10 dBm	-72	-80	-83	-86	-89	-93
S574-1000-18	-10 dBm	-59	-66	-72	-75	-78	-88

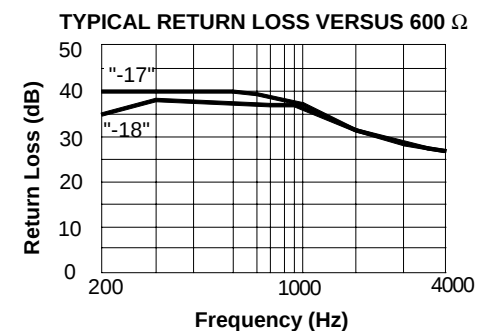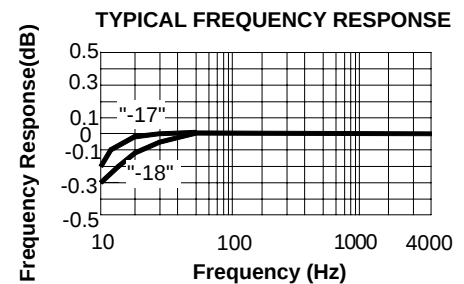

All dimensions are in inches(mm).
The dimension tolerance is +/- 0.01(0.25) unless otherwise specified.

Corporate Office

Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366