





**Maximum Ratings and Thermal Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Value	Unit
Vin Pin to ADJ/GND Pin	Vin	7	V
Thermal Resistance – Junction to Case	R $\theta$ JC	3.0	$^\circ\text{C}/\text{W}$
TO-220AB		8.0	
TO-252 TO-263AB		3.0	
Operating Junction Temperature Range	T $_J$	0 to +125	$^\circ\text{C}$
Storage Temperature Range	T $_{stg}$	-65 to 150	$^\circ\text{C}$

**Electrical Characteristics** <sup>(1)</sup>  $T_J = 25^\circ\text{C}$ , <sup>(2)</sup>  $V_{IN} = 5\text{V}$ ,  $I_o = 10\text{mA}$  unless otherwise noted.



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reference Voltage	V $_{REF}$	T $_J = 25^\circ\text{C}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ $2.65\text{V} \leq V_{IN} \leq 7\text{V}$ $10\text{mA} \leq I_o \leq 3\text{A}$	1.238 1.225	1.250 1.250	1.262 1.275	V
Output Voltage	V $_{OUT}$	GS1085-1.8 $V_{IN} = 5\text{V}$ GS1085-2.5 $V_{IN} = 5\text{V}$ GS1085-3.3 $V_{IN} = 7\text{V}$ GS1085 $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ $2.65\text{V} \leq V_{IN} \leq 5\text{V}$ $10\text{mA} \leq I_o \leq 3\text{A}$	1.78 2.47 3.26 0.98V $_N$	1.8 2.5 3.3 V $_N$	1.82 2.53 3.33 1.02V $_N$	V
Line Regulation	REG $_{line}$	$2.65\text{V} \leq V_{IN} \leq 7\text{V}$ T $_J = 25^\circ\text{C}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$		0.015 0.035	0.2 0.2	% V $_O$
Load Regulation	REG $_{load}$	$10\text{mA} \leq I_o \leq 3\text{A}$ T $_J = 25^\circ\text{C}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$		0.1 0.2	0.3 0.4	% V $_O$
Dropout Voltage	V $_{DROP}$	$0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ $I_o = 3\text{A}$ $I_o = 2\text{A}$ $I_o = 1\text{A}$		1.3 1.28 1.25	1.4 1.37 1.34	V
Output Current	I $_o$	$0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	3.0	4.0	–	A
Adjust Pin Current	I $_{adj}$	$2.65 \leq V_{in} \leq 7\text{V}$ $10\text{mA} \leq I_o \leq 3\text{A}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	–	55	120	$\mu\text{A}$
Adjust Pin Current Change	$\Delta I_{adj}$	$2.65 \leq V_{in} \leq 7\text{V}$ $10\text{mA} \leq I_o \leq 3\text{A}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	–	0.2	5	$\mu\text{A}$
Temperature Stability	T $_S$	$I_o = 0.5\text{A}$ $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	–	0.5	–	%V $_O$
Minimum Load Current Adjustable Version	I $_{LMIN}$	$0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	–	5	10	mA

**Electrical Characteristics(con't.)**<sup>(1)</sup>  $T_J = 25^\circ\text{C}$ <sup>(2)</sup>,  $V_{IN} = 5\text{V}$ ,  $I_O = 10\text{mA}$  unless otherwise noted.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Current Fixed Voltage Version	$I_Q$	$0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	–	10	14	mA
RMS Output Noise	N	$10\text{Hz} \leq f \leq 10\text{kHz}$	–	0.003	–	% $V_O$
Ripple Rejection Ratio	RR	$f = 120\text{Hz}$ , $C_O = 25\mu\text{F}$ $C_{\text{adj}} = 25\mu\text{F}$	60	68	–	dB
Thermal Regulation	$R_{TH}$	$T_A = 25^\circ\text{C}$ , 30ms Pulse	–	0.02	0.05	%/W
Long Term Stability		$T_A = 125^\circ\text{C}$ , 1000 Hrs	–	0.3	–	% $V_O$

**Notes:**

- (1) All parameters, except nominal output voltage are specified for the variable voltage version, allowing a wider  $V_{IN}$  Range. The specified limits also apply for the fixed voltage versions over the allowable input voltage range: GS1085-1.8 (3.2V - 7.0V), GS1085-2.5 (3.9V - 7.0V), GS1085-3.3 (4.75V - 7.0V).
- (2) To maintain the specified junction temperatures, low duty cycle pulse testing is required for most parameters.

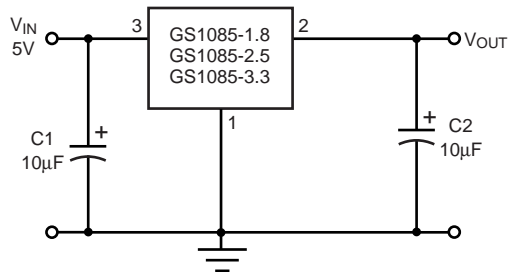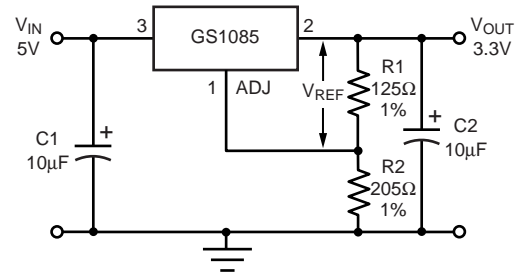**Typical Application Circuit**

**Fixed Voltage Regulator**

**Adjustable Voltage Regulator**
**Notes:**

$$V_{REF} = V_{OUT} - V_{ADJ} = 1.25\text{V (typ.)}$$

$$V_{OUT} = V_{REF} \times (1 + R2/R1) + I_{ADJ} \times R2$$


$$I_{ADJ} = 55\mu\text{A (typ.)}$$

(1) C1 needed if device is far away from filter capacitors


(2) C2 required for stability

**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 – Dropout Voltage vs. Output Current**

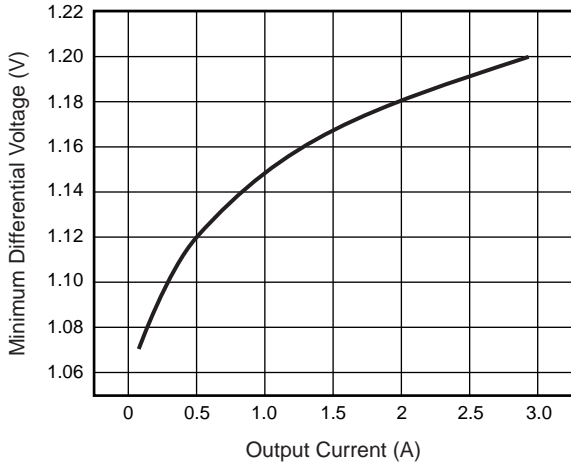


**Fig. 2 – Load Regulation vs. Temperature**

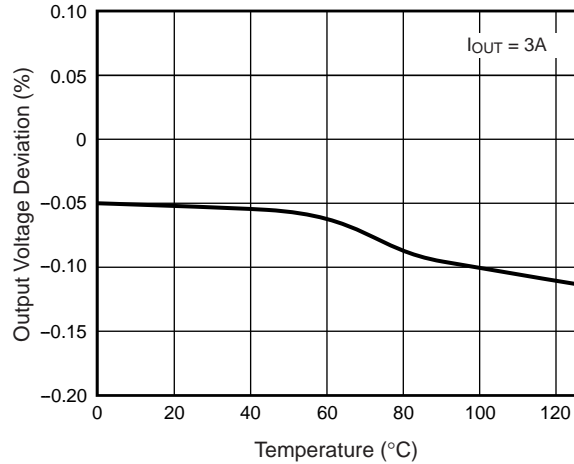


**Fig. 3 – Minimum Load Current (Adjustable Version)**

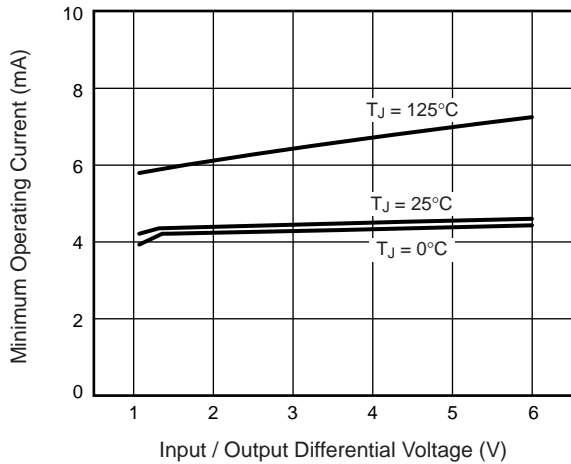


**Fig. 4 – Adjust Pin Current**

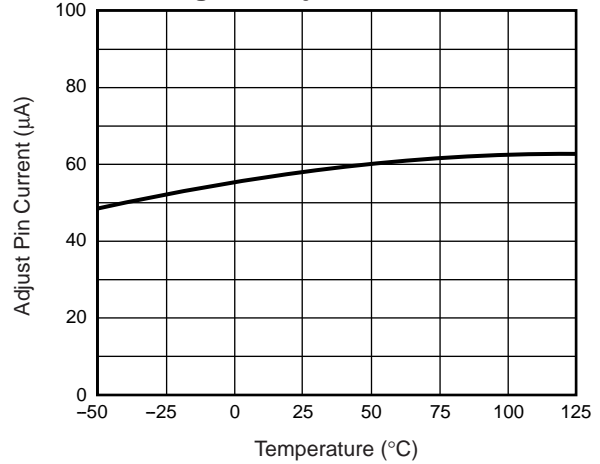



**Fig. 5 – Temperature Stability**

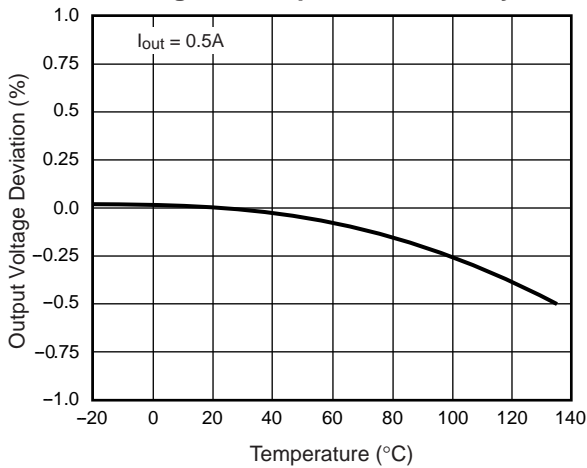

**Fig. 6 – Ripple Rejection (with Cadj 25µF)**

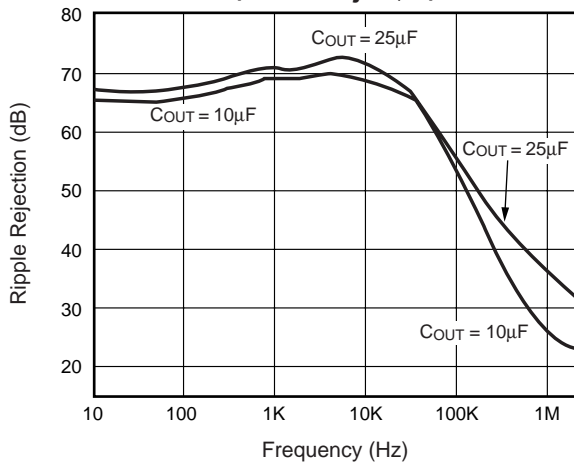

**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

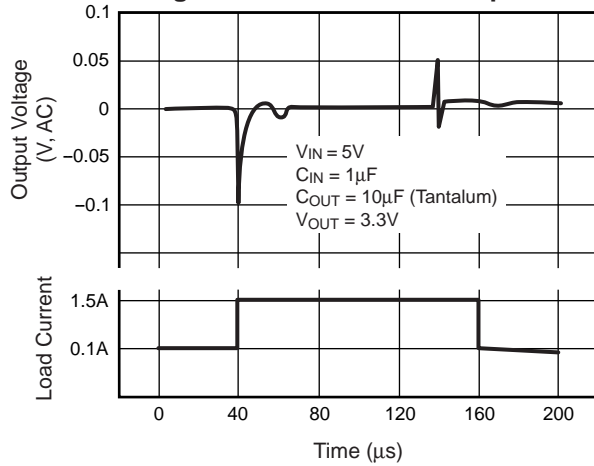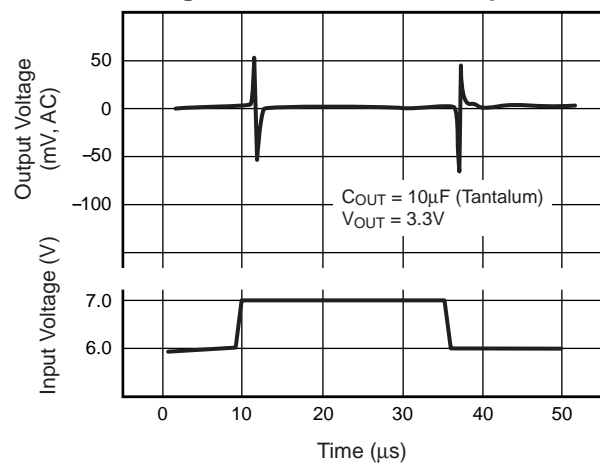
**Fig. 7 – Load Transient Response**

**Fig. 8 – Line Transient Response**

**Ordering Information**
**GS1085Cxx xxx**

 Output Voltage  
 Default: Adj.  
 1.8: 1.8V  
 2.5: 2.5V  
 3.3: 3.3V


 Package Type  
 T: TO-220  
 M: TO-263  
 E: TO-252

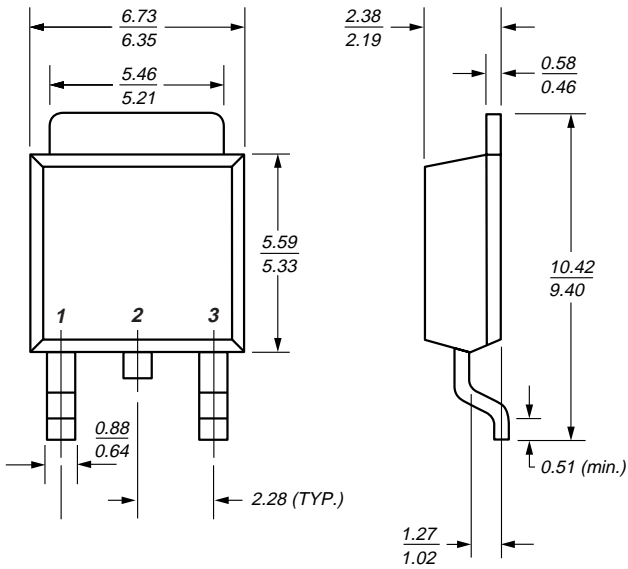**Case Outlines**


**TO-252 (DPAK)**



**TO-220**

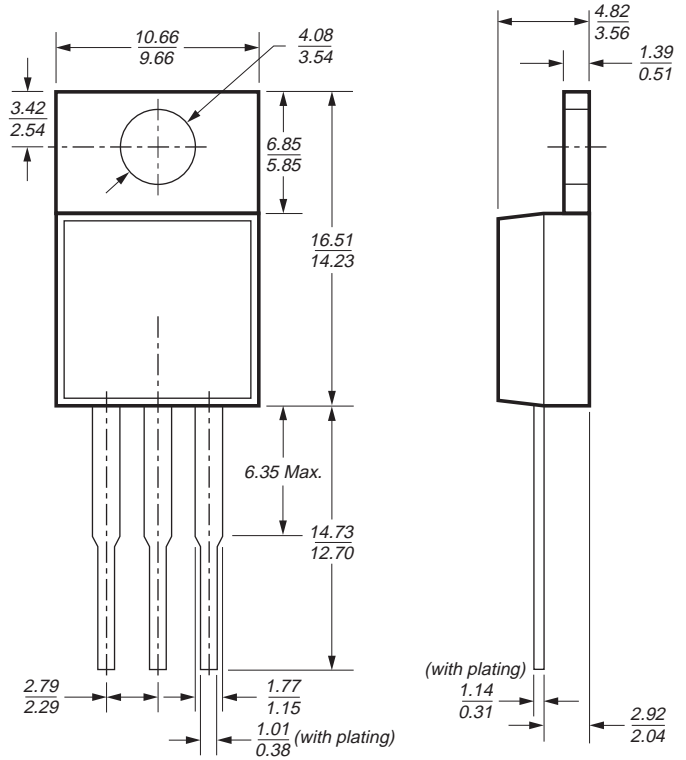

**TO-263**

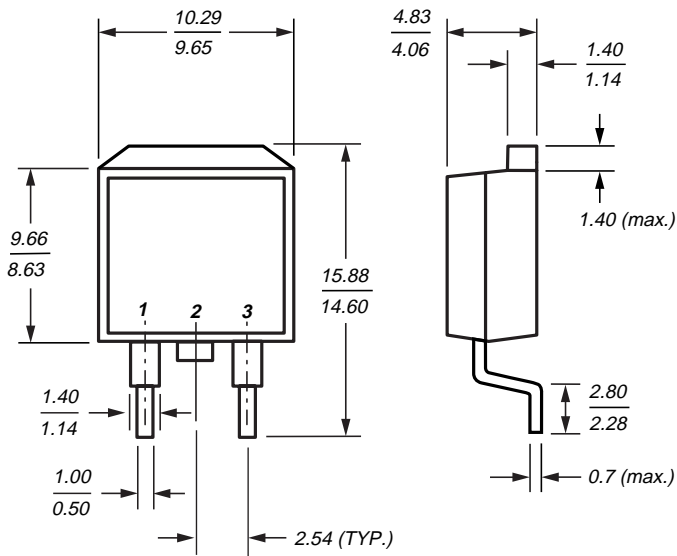

Dimensions in millimeters