


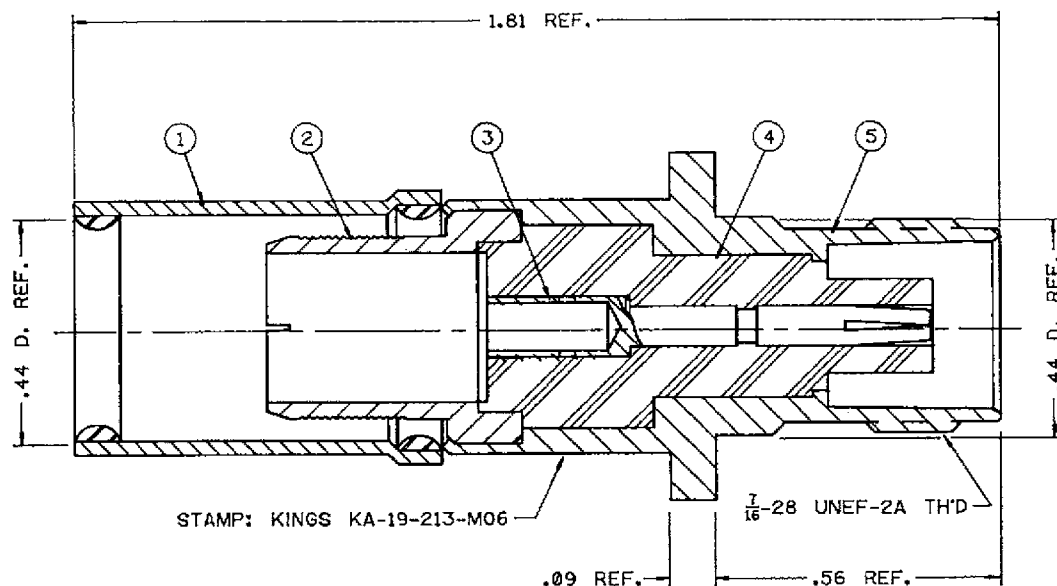


NOTES:

1. FOR USE WITH RG-393/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-150 AND KTD-138.
3. FOR CRIMPING USE DIE SIZE 105.
4. FOR CABLING INSTRUCTIONS SEE CP-5402.
5. CONTACT, ITEM ③, TO BE SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS KA-19-213-M06
XXXX (DATE CODE)

UNLESS OTHERWISE SPECIFIED:
1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^{\circ}30'$
T.I.R. CONCENTRICITY OF ANY 2 DIAMETERS MAY
NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS. BREAK ALL SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING
6. ALL PLATING IN ACCORDANCE WITH KER 10204

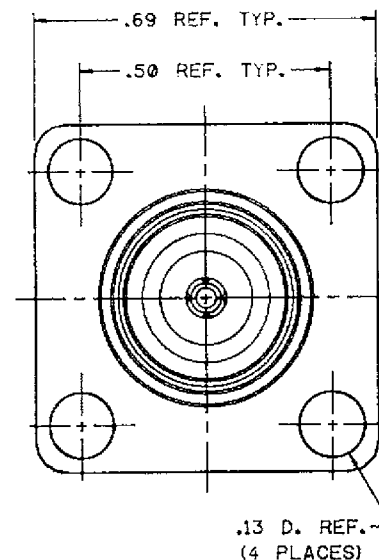

S-D

KA-19-213-M06
(SHEET 1 OF 2)

REVISIONS	
ISSUE	CHANGES
0	ER 28633 EAJ 9 FEB 87
1	CN 29323 C AJ 21OCT87
2	CN 31044 C JCA 9 AUG 89

SCALE:	4:1
APPROX. SURFACE AREA	
WAS E-11381	
USED ON:	
REF:	BOEING
DISC NO. FA24	FILE NO. FA0183.SD
TNC PANEL JACK	
DRAWN EAJ	DATE 7FEB87
APPR. GA	DATE 9FEB87
APPR.	DATE
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
KA-19-213-M06 (SHEET 1 OF 2)	

S-D