

# HI-SPEED CABLE EQCD SERIES

## SPECIFICATIONS

See [www.samtec.com/design/pdf\\_reports.asp](http://www.samtec.com/design/pdf_reports.asp); select EQCD

Mates with: QTE, QSE



## ALSO AVAILABLE

Assemblies with 0,5mm pitch, 0,635mm pitch and MICTOR\* compatible PCB footprints also available. Call Samtec.

\*MICTOR is a registered trademark of The Whitaker Corporation

Surface Mount ground plane for full SMT system

Choice of 50Ω & 75Ω matched impedance systems

38 AWG coax cable

Standard strain relief housing and full housing available

## EQCD - POSITIONS PER ROW - END ASSEMBLY - ASSEMBLY LENGTH - SYSTEM - COAX WIRE - OPTION

-020, -040, -060, -080, -100  
(40 total positions per bank)

Specify END ASSEMBLY from chart

"XX.XX" = Length in INCHES  
Example: -09.00 = (22,86mm) 9.00"


50 = 50 Ohms  
75 = 75 Ohms

38 = 38 AWG Coax cable

-F = Gold flash. Leave blank for standard plating with 10μ" (0,25μm) Gold

-R = Reversed connectors

END ASSEMBLY	TERMINATION	
	Male	Female
-01	Male	Female
-02	Male	Edge Mount
-03	Male	Male
-04	Female	Female
-05	Female	Edge Mount
-06	Edge Mount	Edge Mount

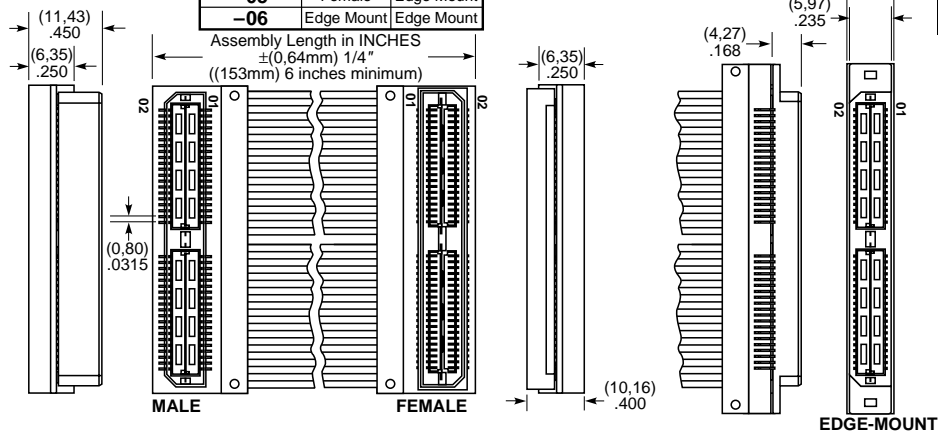

Note: This Series is non-standard, non-returnable.