

Copper Compression Connectors

YSV_D

Hylug® German Industrial Line

Non-insulated copper tubular butt-splices

Description

- Range of copper tube splices joining wires from 6 - 400 mm²

Construction



- Electrolytic copper tube, electro tinned

Performance

- Heat resistant up to +125°C

Tooling

- The indicated numbers in the tooling table refer to pages 48 - 63.

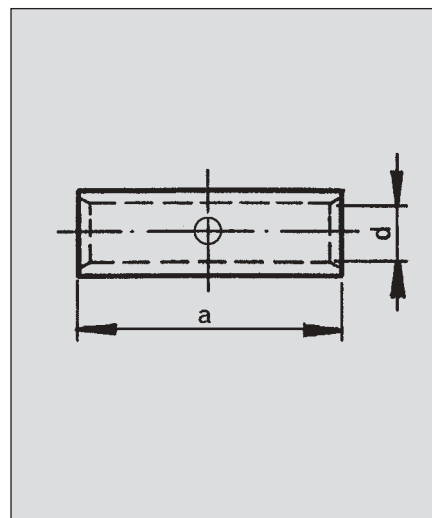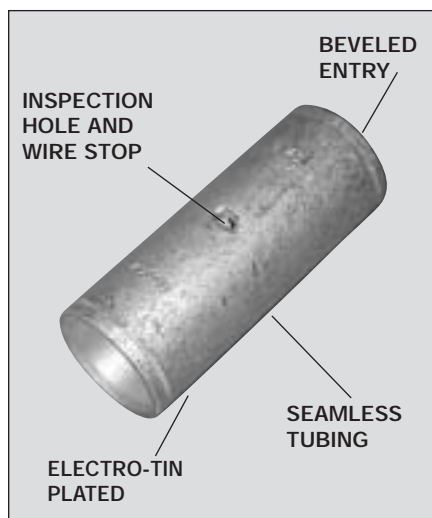

mm ²	Cat. No.	d	a	b	Weight (Kg/100)	Pack Qty	Mechanical tools		Hydraulic tools		
							Tooling number	MRD29	Y500CT BCT500	Y35/Y35BH Y750/Y750BH BAT35/BAT750	Y260DBHM
6	YSV06D	3,5	25,0	10,0	0,520	100	16				
10	YSV010D	4,5	30,0	12,0	0,600	100	16	50-DIES	W-DIES (See YAV_D Line)	U-DIES (See YAV_D Line)	U-DIES WITH ADAPTOR 26UADP (See YAV_D Line)
16	YSV016D	5,5	35,0	14,0	1,020	100	16 - 20				
25	YSV025D	7,0	40,0	16,0	1,430	100	16 - 20				
35	YSV035D	8,5	45,0	18,0	2,250	100	16 - 20				
50	YSV050D	10,0	50,0	22,0	3,380	100	16 - 20				
70	YSV070D	12,0	55,0	24,0	4,900	100	20				
95	YSV095D	13,5	60,0	26,0	6,000	50	20				
120	YSV120D	15,0	65,0	28,0	7,000	50	20				
150	YSV150D	16,5	70,0	30,0	8,300	50					
185	YSV185D	19,4	75,0	33,0	12,000	25					
240	YSV240D	21,2	85,0	36,0	13,900	25					26-DIES
300	YSV300D	23,4	100,0	44,0	22,000	25					
400	YSV400D	26,7	100,0	44,0	29,900	10					