



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




CUSTOMER DRAWING ORIGINAL






REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		RELEASE FOR RoHS	09/20/2006	Edward Wu

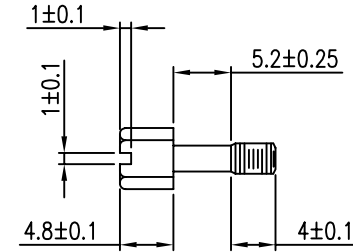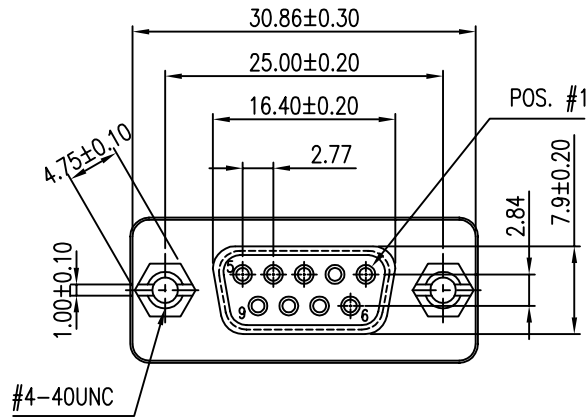

#4-40UNC SCREW




#4-40UNC HEX NUT

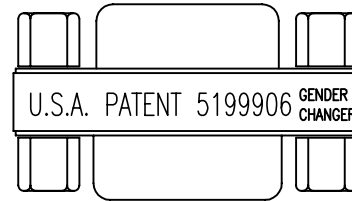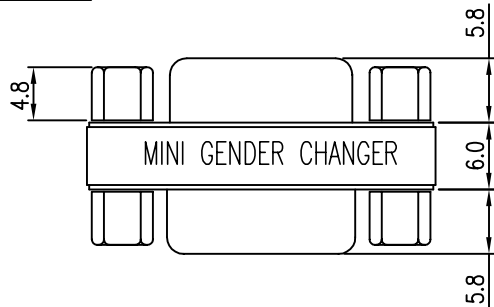

J1	J2
1	1
2	2
3	3
...	
8	8
9	9
G	G

WIRING TABLE

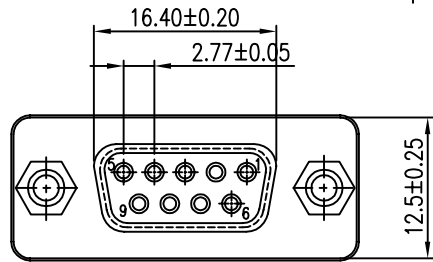

NOTES:

- INSULATOR: PBT, GLASS FIBER FILLED UL94V-0, COLOR- BLUE
- CONTACT: BRASS, GOLD FLASH PLATED OVER NICKEL
- SHELL: STEEL, TIN PLATED
- SCREW: STEEL, NICKEL PLATED
- LABEL: YELLOW COLOR WITH BLACK CHARACTER
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.

TOLERANCE m/m	APPROVALS	DATE	TITLE	Amphenol® Amphenol Corporation Amphenol Taiwan Corporation	
x. ±0.30	DRAWN XL Wu	09/20/06	GENDER CHANGER D-SUB FEMALE 9-POS. TO D-SUB FEMALE 9-POS.	SCALE	N.A.
x.x ±0.25	CHECKED Sondra Sang	09/20/06		SHEET	1 OF 1
x.xx ±0.15	APPROVED Edward Wu	09/20/06		DRAWING NO.	DSUB-51797005EU-25
x.xxx ±0.08	UNIT		SIZE	PART NO.	REV.
ANGULAR ±2°	MM		A4	G517 97005 EU	A
UNLESS OTHERWISE SPECIFIED					