


SLS240PCA Product Details

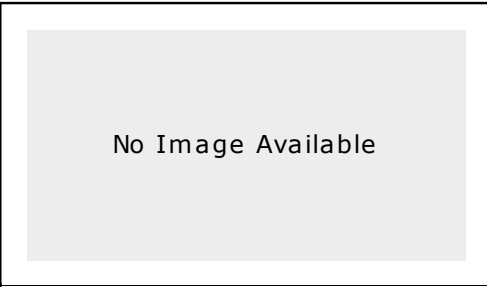

Slide Switches

[Not EU RoHS or ELV Compliant \(Find RoHS Compliant Alternates\)](#)

Product Highlights:


- Number of Positions = 4
- Double Pole - Four Throw Configuration (Pole-Throw)
- Actuator Style = Top
- Actuator Color = Black
- SLS Series

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

SLS240PCA
(4-1437577-3)
TE Internal Number: 4-1437577-3



[Search for Replacement Parts](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [ALCOSWITCH PRODUCTS](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Product Usage](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Number of Positions](#) = 4
- Configuration (Pole-Throw) = Double Pole - Four Throw
- Actuator Style = Top
- Mount Angle = Vertical
- Grade = Consumer
- Termination Type = PC

Electrical Characteristics:

- Contact Rating = 150mA @ 12 VDC, 250mA @ 125 VAC

Body Related Features:

- Actuator Color = Black
- Series = SLS
- Mount Style = Through-Hole
- PCB Tail Length (mm [in]) = 2.50 [0.098]
- Actuator Length (mm [in]) = 5.00 [0.197]
- Actuator Material = Polycarbonate

Contact Related Features:

- Contact Plating = Silver
- Contact Base Material = Copper Alloy

Configuration Related Features:

- Terminal Configuration = Standard
- Number of Actuators = Single

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

Identification Marking:

- Stamped Marking = With

Other:

- Brand = Alcoswitch