

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

FEATURES

- Fully qualified to Class H or K
- -55° to +125°C operation
- 16 to 40 VDC input
- Fully Isolated
- Magnetic feedback
- Fixed frequency, 600 kHz typical
- Topology – Single Ended Forward
- 50 V for up to 120 ms transient protection
- Inhibit input side and output side
- Sync function
- Output trim on single output models
- Indefinite short circuit protection
- Remote sense on single output models
- Up to 85% efficiency / 43 W/in³
- Parallelable up to 148 watts



| MODELS | |
|------------|------|
| VDC OUTPUT | |
| SINGLE | DUAL |
| 3.3 | ±5 |
| 5 | ±12 |
| 12 | ±15 |
| 15 | |

DESCRIPTION

The SMFL Series™ 28-volt DC/DC converters are rated up to 65 watts output power over a -55° to +125°C temperature range with a 28 Vdc nominal input. On dual output models up to 70% of the rated output power can be drawn from either the positive or negative outputs. Current sharing allows the units to be paralleled for total power of up to 148 watts. The welded, hermetically sealed package is only 3.0 x 1.5 x 0.40 inches, giving the series an overall power density of up to 43 watts per cubic inch.

SCREENING

SMFL converters offer the following screening options: Space Prototype (O), Class H, or Class K. Radiation tolerant to Radiation Hardness Assurance (RHA) levels of “-” (O) or “R”, per MIL-STD-38534. Interpoint model numbers use an “O” in the RHA designator position to indicate the “-” (dash) Radiation Hardness Assurance level of MIL-PRF-38534, which is defined as “no RHA”. See “Class H and K, MIL-PRF-38534 Screening” tables for more information.

DESIGN FEATURES

SMFL Series converters are switching regulators that use a quasi-square wave, single ended forward converter design with a constant switching frequency of 600 kHz typical.

Isolation between input and output circuits is provided with a transformer in the forward path and a wide bandwidth magnetic coupling in the feedback control loop. The SMFL uses a unique dual loop feedback technique that controls output current with an inner feedback loop and an output voltage with a cascaded voltage mode feedback loop. The additional secondary current mode feedback loop improves transient response in a manner similar to primary current mode control and allows for ease of paralleling, but without the cost and complexity.

The constant frequency, pulse-width modulated converters use a quasi-square wave single-ended forward design. Tight load regulation is achieved through a wide-bandwidth magnetic feedback circuit. The output voltage on single SMFL models can be trimmed to a

specific output voltage by adding an external resistor (see Figure 1 for resistor values).

INHIBIT

The SMFL Series converters have two inhibit terminals (INH1 and INH2) that can be used to disable power conversion, resulting in a very low quiescent input current and no generation of switching noise. A logic low (<0.8 volts) is required to inhibit the converter between INH1 (pin 4) and Input Common (pin 2). A logic low (<0.5 volts) is required to inhibit the converter between INH2 (pin 12) and Output Common (pin 8). The application of intermediate voltages to these pins (1.5 to 10.5 volts) should be avoided.

SYNC

Converters may be synced to an external clock (525 to 675 kHz) or to one another by using the sync in or out pins. The nominal free-run switching frequency is 600 kHz (see Application Note titled “Inhibit and Synchronization”).

CURRENT AND PARALLEL OPERATION

Multiple single output SMFL converters may be used in parallel to drive a common load. In this mode of operation the load current is shared by two or three SMFL converters. In current sharing mode, one SMFL converter is designated as a master. The SLAVE pin (pin 11) of the master is left unconnected and the MSTR/INH2 pin (pin 12) of the master is connected to the SLAVE pin (pin 11) of the slave units. The units designated as slaves have the MSTR/INH2 pin (pin 12) connected to the SNS RTN pin (pin 9). Note that synchronizing the units together is not required for current sharing operation. A second slave unit may be placed in parallel with a master and slave; this requires the TRI pin (pin 3) of the master unit to be connected to the SNS RTN pin (pin 9). See Figure 2 for a block diagram of parallel connections.

When paralleled, 76% of the total combined power ratings of the SMFL converters are available at the load. Overload and short circuit performance are not adversely affected during parallel operation.

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

OPERATING CONDITIONS AND CHARACTERISTICS

Input Voltage Range

- 16 to 40 VDC continuous
- 50 V for 120 ms transient

Output Power

- 40 to 65 watts depending on model

Lead Soldering Temperature (10 sec per lead)

- 300°C

Storage Temperature Range (Case)

- -65°C to +150°C

Power Dissipation (Pd)

- 14 watts (16 watts SMFL2805S, SMFL2805D)

Case Operating Temperature (Tc)

- -55°C to +125°C full power

Output Voltage Temperature Coefficient

- 100 ppm/°C typical

Input to Output Capacitance

- 150 pF, typical

Current Limit

- 125% of full load typical

Isolation

- 100 megohm minimum at 500 V

Audio Rejection

- 50 dB typical

Conversion Frequency (-55°C to 125°C)

- Free run mode 600 kHz typical
525 kHz. min, 675 kHz max

Inhibit Pin Voltage (unit enabled)

- INH1 = 9 to 12 V, INH2 = 6 to 9 V

SYNC IN AND INHIBIT (INH1, INH2)

Sync In (525 to 675 kHz)

- Duty cycle 40% min, 60% max
- Logic low 0.8 V max
- Logic high 4.5 V min, 5 V max
- Referenced to input common

Sync Out

- Referenced to input common

Inhibit (INH1, INH2) TTL Open Collector

- Logic low (output disabled)
INH1 referenced to input common
Logic low 0.8 V max
Inhibit pin current 10 mA max
INH2 referenced to output common
Logic low 0.5 V max
Inhibit pin current 5 mA max
- Logic high (output enabled)
Open collector

MECHANICAL AND ENVIRONMENTAL

Size (maximum)

3.005 x 1.505 x 0.400 inches (76.33 x 38.23 x 10.16 mm)
See case U for dimensions.
Case options V, W, Y, and Z are available by special order.

Weight (maximum)

86 grams

Screening

Space Prototype (O), Class H, or Class K

Radiation tolerant to Radiation Hardness Assurance (RHA) levels of “-” (O) or “R”, per MIL-STD-38534. Interpoint model numbers use an “O” in the RHA designator position to indicate the “-” (dash) Radiation Hardness Assurance level of MIL-PRF-38534, which is defined as “no RHA”.

See “Class H and K, MIL-PRF-38534 Screening” tables for more information.
Available configurations: OO, HO, HR, KR

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

PIN OUT

| Pin | Single Output | Dual Output |
|-----|--------------------|--------------------|
| 1 | Positive Input | Positive Input |
| 2 | Input Common | Input Common |
| 3 | Triple (TRI) | Triple (TRI) |
| 4 | Inhibit 1 (INH1) | Inhibit 1 (INH1) |
| 5 | Sync Out | Sync Out |
| 6 | Sync In | Sync In |
| 7 | Positive Output | Positive Output |
| 8 | Output Common | Output Common |
| 9 | Sense Return | Negative Output |
| 10 | Positive Sense | No connection |
| 11 | Slave | Slave |
| 12 | Master / Inhibit 2 | Master / Inhibit 2 |

PINS NOT IN USE

| | |
|----------------|--|
| TR1 | Leave unconnected |
| Master | Leave unconnected |
| Slave | Leave unconnected |
| Sync In | Connect to Input Common |
| Inhibit (INH1) | Leave unconnected |
| Inhibit (INH2) | Leave unconnected |
| Sync Out | Leave unconnected |
| Sense Lines | Must be connected to appropriate outputs |

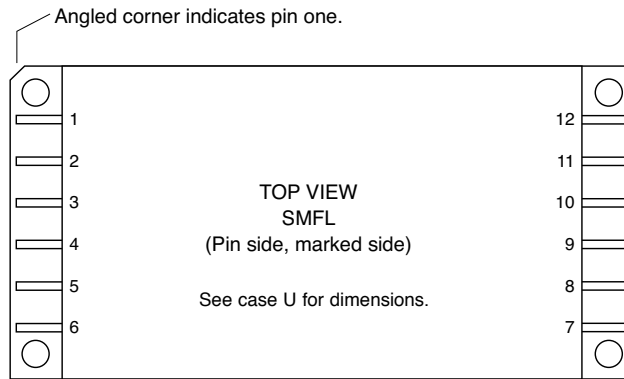


FIGURE 3: PIN OUT

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

Electrical Characteristics: -55°C to +125°C Tc, 28 VDC Vin, 100% load, RHA level O, unless otherwise specified.

| SINGLE OUTPUT MODELS | | SMFL283R3S | | | SMFL2805S | | | SMFL2812S | | | SMFL2815S | | | UNITS |
|---------------------------------------|---|------------|------|-------|-----------|------|------|-----------|-------|-------|-----------|-------|-------|--------|
| PARAMETER | CONDITIONS | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| OUTPUT VOLTAGE | TC = 25°C | 3.26 | 3.30 | 3.34 | 4.95 | 5.00 | 5.05 | 11.88 | 12.00 | 12.12 | 14.85 | 15.00 | 15.15 | VDC |
| OUTPUT CURRENT | V _{IN} = 16 TO 40 VDC | 0 | — | 12.12 | 0 | — | 10 | 0 | — | 5 | 0 | — | 4.33 | A |
| OUTPUT POWER | V _{IN} = 16 TO 40 VDC | 0 | — | 40 | 0 | — | 50 | 0 | — | 60 | 0 | — | 65 | W |
| OUTPUT RIPPLE 10 kHz - 2 MHz | TC = 25°C | — | 10 | 35 | — | 15 | 35 | — | 30 | 75 | — | 30 | 85 | mV p-p |
| | TC = -55°C TO +125°C | — | 10 | 50 | — | 30 | 50 | — | 45 | 100 | — | 45 | 110 | |
| LINE REGULATION | V _{IN} = 16 TO 40 VDC | — | 0 | 20 | — | 0 | 20 | — | 0 | 20 | — | 0 | 20 | mV |
| LOAD REGULATION | NO LOAD TO FULL | — | — | 40 | — | — | 20 | — | — | 20 | — | — | 20 | mV |
| INPUT VOLTAGE | CONTINUOUS | 16 | 28 | 40 | 16 | 28 | 40 | 16 | 28 | 40 | 16 | 28 | 40 | VDC |
| | TRANSIENT ^{1, 2} 120 ms | — | — | 50 | — | — | 50 | — | — | 50 | — | — | 50 | v |
| INPUT CURRENT | NO LOAD | — | 70 | 100 | — | 70 | 120 | — | 50 | 100 | — | 50 | 100 | mA |
| | INHIBITED – INH1 | — | 9 | 14 | — | 9 | 14 | — | 9 | 14 | — | 9 | 14 | |
| | INHIBITED – INH2 | — | 35 | 70 | — | 35 | 70 | — | 35 | 70 | — | 35 | 70 | |
| INPUT RIPPLE | 10 kHz - 10 MHz | — | 30 | 50 | — | 30 | 50 | — | 30 | 50 | — | 30 | 50 | mA p-p |
| EFFICIENCY | TC = 25°C | 70 | — | — | 75 | 78 | — | 81 | 84 | — | 82 | 85 | — | % |
| LOAD FAULT | SHORT CIRCUIT POWER DISSIPATION TC = 25°C | — | 12.5 | 16 | — | 12.5 | 16 | — | 10 | 16 | — | 10 | 16 | W |
| | RECOVERY ¹ | — | 1.5 | 4 | — | 1.5 | 4 | — | 1.5 | 4 | — | 1.5 | 4 | ms |
| STEP LOAD RESPONSE | 50% - 100% - 50% TRANSIENT | — | 200 | 300 | — | 250 | 350 | — | 450 | 600 | — | 500 | 600 | mV pk |
| | RECOVERY ^{1, 3} | — | 1.5 | 3.0 | — | 1.5 | 3.0 | — | 1.5 | 3.0 | — | 1.5 | 3.0 | ms |
| STEP LINE RESPONSE ^{1, 3} | 16 - 40 - 16 VDC TRANSIENT ⁴ | — | 250 | 300 | — | 250 | 300 | — | 250 | 400 | — | 250 | 400 | mV pk |
| | RECOVERY | — | 200 | 600 | — | 200 | 300 | — | 200 | 300 | — | 200 | 300 | μs |
| START-UP ⁵ | DELAY | — | 3.5 | 10 | — | 3.5 | 6 | — | 3.5 | 6 | — | 3.5 | 6 | ms |

Notes

1. Guaranteed by design, not tested.

2. Unit will shut down above approximately 45 V but will be undamaged and will restart when voltage drops into normal range.

3. Recovery time is measured from application of the transient to point at which V_{out} is within 1% of final value.

4. Transition time > 10 μs.

5. Tested on release from inhibit.

6. Shall not compromise DC performance.

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

Electrical Characteristics: -55°C to +125°C Tc, 28 VDC Vin, 100% load, RHA level O, unless otherwise specified.

| DUAL OUTPUT MODELS ¹⁰ | | | SMFL2805D | | | SMFL2812D | | | SMFL2815D | | | UNITS |
|--|--|--------------------|-----------|------|------|-----------|-------|-------|-----------|-------|-------|--------|
| PARAMETER | CONDITIONS | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| OUTPUT VOLTAGE | TC = 25°C | + V _{OUT} | 4.95 | 5.00 | 5.05 | 11.88 | 12.00 | 12.12 | 14.85 | 15.00 | 15.15 | VDC |
| | | - V _{OUT} | 4.92 | 5.00 | 5.08 | 11.82 | 12.00 | 12.18 | 14.77 | 15.00 | 15.23 | |
| OUTPUT CURRENT ² | VIN = 16 TO 40 VDC | EACH OUTPUT | 0 | — | 7 | 0 | — | 3.5 | 0 | — | 3.03 | A |
| | | TOTAL OUTPUT | 0 | — | 10 | 0 | — | 5 | 0 | — | 4.33 | |
| OUTPUT POWER | VIN = 16 TO 40 VDC | | 0 | — | 50 | 0 | — | 60 | 0 | — | 65 | W |
| OUTPUT RIPPLE ± V _{OUT} | 10 kHz - 2 MHz | | — | 50 | 100 | — | 50 | 120 | — | 50 | 150 | mV p-p |
| LINE REGULATION | VIN = 16 TO 40 VDC | + V _{OUT} | — | 0 | 50 | — | 0 | 50 | — | 0 | 50 | mV |
| | | - V _{OUT} | — | 25 | 100 | — | 25 | 100 | — | 25 | 100 | |
| LOAD REGULATION | NO LOAD TO FULL | + V _{OUT} | — | 0 | 50 | — | 10 | 50 | — | 10 | 50 | mV |
| | | - V _{OUT} | — | 25 | 100 | — | 50 | 120 | — | 150 | 150 | |
| CROSS REGULATION TC = 25°C | SEE NOTE 3 | | — | 5 | 8 | — | 2 | 4 | — | 2 | 4 | % |
| | SEE NOTE 4 | | — | 3 | 6 | — | 2 | 4 | — | 2 | 4 | |
| INPUT VOLTAGE | CONTINUOUS | | 16 | 28 | 40 | 16 | 28 | 40 | 16 | 28 | 40 | VDC |
| | TRANSIENT ^{1, 5} 120 ms | | — | — | 50 | — | — | 50 | — | — | 50 | V |
| INPUT CURRENT | NO LOAD | | — | 50 | 120 | — | 50 | 100 | — | 50 | 100 | mA |
| | INHIBITED-INH1 | | — | 9 | 14 | — | 9 | 14 | — | 9 | 14 | |
| | INHIBITED-INH2 | | — | 35 | 70 | — | 35 | 70 | — | 35 | 70 | |
| INPUT RIPPLE CURRENT | 10 kHz - 10 MHz | | — | 30 | 50 | — | 30 | 50 | — | 30 | 80 | mA p-p |
| EFFICIENCY TC = 25°C | BALANCED LOAD | | 75 | 78 | — | 81 | 84 | — | 82 | 85 | — | % |
| LOAD FAULT TC = 25°C | SHORT CIRCUIT POWER DISSIPATION | | — | 12.5 | 16 | — | 10 | 14 | — | 10 | 14 | W |
| | RECOVERY ¹ | | — | 1.5 | 4.0 | — | 1.5 | 4.0 | — | 1.5 | 4.0 | ms |
| STEP LOAD RESPONSE ± V _{OUT} | 50% - 100% - 50% TRANSIENT | | — | 250 | 350 | — | 450 | 600 | — | 500 | 600 | mV pk |
| | RECOVERY ^{1, 7} | | — | 1.5 | 3.0 | — | 1.5 | 3.0 | — | 1.5 | 3.0 | ms |
| STEP LINE RESPONSE ^{1, 6} ± V _{OUT} | 16 - 40 -16 VDC TRANSIENT ⁷ | | — | 250 | 300 | — | 250 | 400 | — | 250 | 400 | mV pk |
| | RECOVERY | | — | 200 | 300 | — | 200 | 300 | — | 200 | 300 | μs |
| START-UP ⁸ | DELAY | | — | 3.5 | 6 | — | 3.5 | 6 | — | 3.5 | 6 | ms |

Notes

1. Guaranteed by design, not tested.
2. Up to 70% of the total output power is available from either output providing the opposite output is simultaneously carrying 30% of the total power.
3. Effect on negative Vout from 50%/50% loads to 70%/30% or 30%/70% loads.
4. Effect on negative Vout from 50%/50% loads to 50% then 10% load on negative Vout.

5. Unit will shut down above approximately 45V but will be undamaged and will restart when voltage drops into normal range.
6. Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.
7. Transition time > 10 μS.
8. Tested on release from inhibit.
9. Shall not compromise DC performance.
10. Parallel load share function not characterized for Dual output connectors.

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

Typical Performance Curves: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.




FIGURE 4




FIGURE 5




FIGURE 6




FIGURE 7




FIGURE 8




FIGURE 9




FIGURE 10




FIGURE 11




FIGURE 12

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

Typical Performance Curves: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.




FIGURE 13




FIGURE 14






FIGURE 16

SMFL Single and Dual DC/DC Converter Cases

28 VOLT INPUT – 65 WATT

TOP VIEW CASE U Flanged case, short-leaded

*Case U does not require designator in Case Option position of model number.

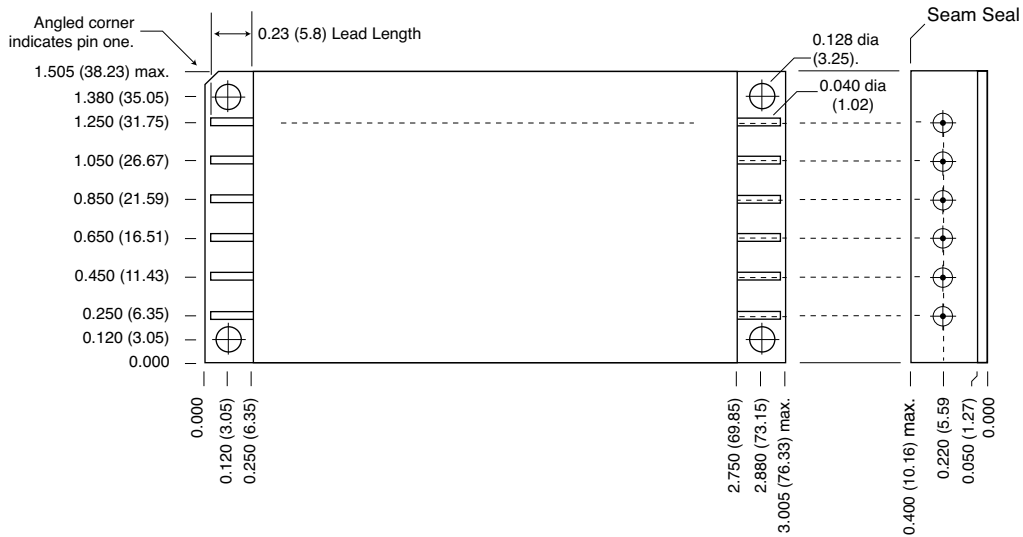

Case dimensions in inches (mm)
 Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
 unless otherwise specified

CAUTION
 Heat from reflow or wave soldering may damage the device.
 Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin

Materials
 Header Cold Rolled Steel/Nickel/Gold
 Cover Kovar/Nickel
 Pins #52 alloy/Nickel/Gold; compression glass seal

Case U, Rev C, 20060302
 Please refer to the numerical dimensions for accuracy. All information is believed to be accurate, but no responsibility is assumed for errors or omissions. Interpoint reserves the right to make changes in products or specifications without notice.
 Copyright © 1999-2006 Interpoint Corp. All rights reserved.

FIGURE 17: CASE U

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

CLASS H AND K, MIL-PRF-38534 ELEMENT EVALUATION

| COMPONENT-LEVEL TEST PERFORMED | SPACE PROTOTYPE (O) NON-QML ¹ | | CLASS H QML | | CLASS K QML | |
|---|--|----------------|------------------|----------------|------------------|----------------|
| | M/S ² | P ³ | M/S ² | P ³ | M/S ² | P ³ |
| Element Electrical | yes | no | yes | yes | yes | yes |
| Element Visual | no | no | yes | yes | yes | yes |
| Internal Visual | no | N/A | yes | N/A | yes | N/A |
| Temperature Cycling | no | no | no | no | yes | yes |
| Constant Acceleration | no | no | no | no | yes | yes |
| Interim Electrical | no | N/A | no | N/A | yes | N/A |
| Burn-in | no | N/A | no | N/A | yes | N/A |
| Post Burn-in Electrical | no | N/A | no | N/A | yes | N/A |
| Steady State Life | no | N/A | no | N/A | yes | N/A |
| Voltage Conditioning Aging | N/A | no | N/A | no | N/A | yes |
| Visual Inspection | no | no | N/A | no | N/A | yes |
| Final Electrical | no | no | yes | yes | yes | yes |
| Wire Bond Evaluation ⁴ | no | no | yes | yes | yes | yes |
| SEM | no | N/A | no | N/A | yes | N/A |
| SLAM™/C-SAM: Input capacitors only (Add'l test, not req. by H or K) | no | no | no | yes | no | yes |

Notes:

1. Non-QML products do not meet all of the requirements of MIL-PRF-38534.
2. M/S = Active components (Microcircuit and Semiconductor Die)
3. P = Passive components
4. Not applicable to EMI filters that have no wirebonds.

Definitions:

Element Evaluation: Component testing/screening per MIL-STD-883 as determined by MIL-PRF-38534

SEM: Scanning Electron Microscopy

SLAM™: Scanning Laser Acoustic Microscopy

C-SAM: C - Mode Scanning Acoustic Microscopy

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

CLASS H AND K, MIL-PRF-38534 ENVIRONMENTAL SCREENING

| END ITEM-LEVEL TEST PERFORMED | SPACE PROTOTYPE (O) NON-QML ¹ | CLASS H QML | CLASS K QML |
|--|--|------------------|------------------|
| Non-destruct bond pull ² Method 2023 | no | yes ³ | yes |
| Pre-cap Inspection Method 2017, 2032 | yes | yes | yes |
| Temperature Cycle (10 times) Method 1010, Cond. C, -65°C to 150°C, ambient | yes | yes | yes |
| Constant Acceleration Method 2001, 3000 g | yes | yes | yes |
| PIND Test Method 2020, Cond. A | no | yes ³ | yes |
| Pre burn-in test | yes | yes | yes |
| Burn-in Method 1015, 125°C case, typical | | | |
| 96 hours | yes | no | no |
| 160 hours | no | yes | no |
| 2 x 160 hours (includes mid-BI test) | no | no | yes |
| Final Electrical Test MIL-PRF-38534 Group A, Subgroups 1 through 6 -55°C, +25°C, +125°C case | yes | yes | yes |
| Radiography Method 2012 | N/A | N/A | N/A |
| Post Radiography Electrical Test Room temperature | N/A | N/A | yes ³ |
| Hermeticity Test Fine Leak, Method 1014, Cond. A Gross Leak, Method 1014, Cond. C | yes yes | yes yes | yes yes |
| Final visual inspection Method 2009 | yes | yes | yes |

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Notes:

1. Space Prototype (O), non-QML products, do not meet all of the requirements of MIL-PRF-38534.
2. Not applicable to EMI filters that have no wirebonds.
3. Not required by DSCC but performed to assure product quality.

SMFL Single and Dual DC/DC Converters

28 VOLT INPUT – 65 WATT

CLASS H AND K, MIL-PRF-38534 RADIATION ASSURANCE

| RADIATION HARDNESS ASSURANCE LEVELS | ENVIRONMENTAL SCREENING LEVELS | | |
|---|--|-----------------|-----------------|
| | SPACE PROTOTYPE (O) NON-QML ³ | CLASS H QML | CLASS K QML |
| O ² : Standard, no radiation guarantee | OO | HO | N/A |
| P ⁵ : Radiation tolerant–Tested lots up to 30 K Rads (Si) total dose SEU guarantee up to 40 MeV | N/A | HP ⁴ | KP ⁴ |
| R ⁵ : Radiation tolerant–Tested lots up to 100 K Rads (Si) total dose SEU guarantee up to 40 MeV | N/A | HR ⁴ | KR ⁴ |
| F ⁵ : [SMRT only] Radiation tolerant–Tested lots up to 300 K Rads (Si) total dose SEU guarantee up to 60 MeV | N/A | N/A | KF ⁴ |
| H ^{1,5} : Radiation tolerant–Tested lots up to 1,000 K Rads (Si) total dose | N/A | HH ⁴ | KH ⁴ |

Notes:

- Our EMI filters are designed exclusively with passive components providing maximum tolerance for space environment requirements.
- Interpoint model numbers use an "O" in the RHA designator position to indicate the "-" (dash) Radiation Hardness Assurance level of MIL-PRF-38534, which is defined as "no RHA".
- Space Prototype (O), non-QML, products do not meet all of the requirements of MIL-PRF-38534.
- Redmond site, Interpoint, has a Radiation Hardness assurance plan on file with DSCC. Our SMD products with RHA "P", "R," "F" and "H" code meet DSCC requirements.
- Space converters are available with Radiation Hardness Assurance (RHA) levels of "O" and "R" with the following exceptions:
SMRT28xxx is only available with Radiation Hardness Assurance (RHA) levels of "O" "P", "R" and "F".
SMHP120xxx is only available with Radiation Hardness Assurance (RHA) level of "O".
Space filters are only available with Radiation Hardness Assurance (RHA) levels of "O" and "H".