



APPROVAL	DATE
	12/15/08

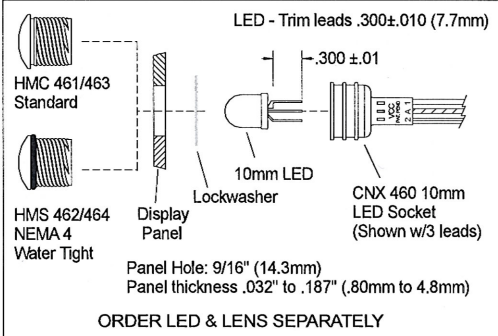

CABLE ORDERING CODE (EXAMPLE): CNX 460 E02 4 1 12


TERMINATION	WIRE SIZE	WIRE COLOR	WIRE LENGTH
X = Stripped End	Standard	1 Wht - Blk	04 4 Inches
E = Single Row	4 24 AWG	2 Red - Blk	06 6 Inches
D = Dual Row		6 Wht - Blk - Red	08 8 Inches
		0 Wht - Blk - Red - Gm	12 12 Inches
			18 18 Inches
			24 24 Inches

CALL FACTORY DIRECT FOR ADDITIONAL OPTIONS

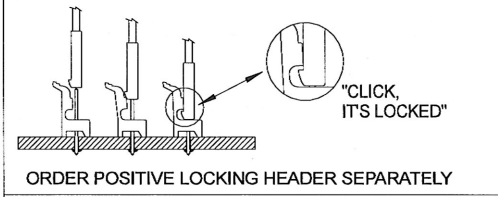

LENS OPTIONS

LENS STYLE	COLOR
HMC 461/463 Standard	RTP - Red GTP - Green ATP - Amber BTP - Blue
HMS 462/464 Water Tight NEMA 4	YTP - Yellow CTP - Clear

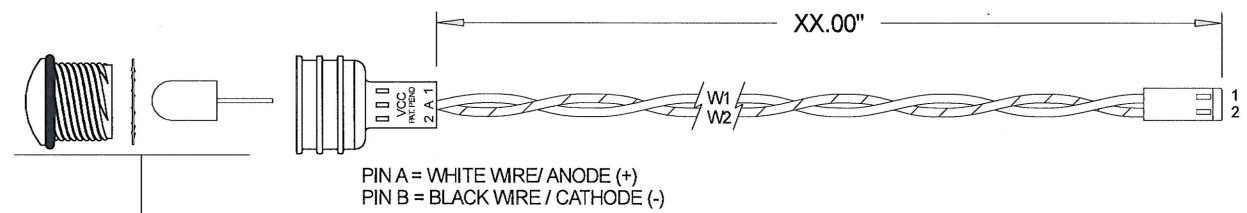

Order Lens & LED Separately
(Lockwasher included with Lens)

U.S. & FOREIGN PAT. ISSUED & PEND.

NOTES:

Material: Lens - Polycarbonate U.L. Rating 94-V2
LED Connector - Polyester U.L. Rating 94-V0
Header Connector - Polyester U.L. Rating 94-V0
U.L. Manual - "Thermoplastic material used on a secondary circuit."
Wire: 1007/1569 - 24 AWG, stranded (105° C)
Mounting: Lens - panel hole size 5/16" (8.0mm)
Tested: UV, Solar, Shock, Vibration, Temperature -45° - 105°C. HMS 462/464 meet NEMA 4

REVISIONS			
NO	DESCRIPTION	DATE	BY
1	Add HMC 463, HMS 464	12/15/08	JG
2			
3			
4			
5			

VCC P/N: CNX 460 CABLE ASSEMBLY

VCC VISUAL COMMUNICATIONS COMPANY, INC.
190 Bosstick Blvd, Ste. 101 San Marcos, California 92069 U.S.A.
Phone (760) 560-1300 Fax (760) 560-1301 e-mail vccsales@vccite.com

TOLERANCES	SCALE	N/A	DATE	11/12/08	DRAWING NO.	REV.
DECIMAL	±.500	DIAMETER	DRAWN BY	JDG	CNX 460 CABLE_Assy	1
ANGLE		RADII	CHK'D			