


## SSF-LXH555-2000 SERIES P.C.B. MICRO-MINI LEADS

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> <li>Dialight 555 Compatible</li> <li>Very Small Size</li> <li>Stackable Package</li> </ul>		<ul style="list-style-type: none"> <li>Logic Status Indicator</li> <li>Fault Indicator</li> </ul>		<ul style="list-style-type: none"> <li>Holder: 94V-O Nylon</li> <li>Terminals: .7x.25 Leads</li> </ul>		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED	
SSF-LXH555-2001RD	RED	655	10-25	1.8	5	20 SSL-LXA223XX
SSF-LXH555-2101ID	RED	635	10-25	2.1	10	20 SSL-LXA223XX
SSF-LXH555-2301GD	GREEN	565	10-25	2.1	10	20 SSL-LXA223XX
SSF-LXH555-2401YD	YELLOW	585	10-25	2.1	10	20 SSL-LXA223XX


See pages 8-14 for Max. operating limits and operating curves

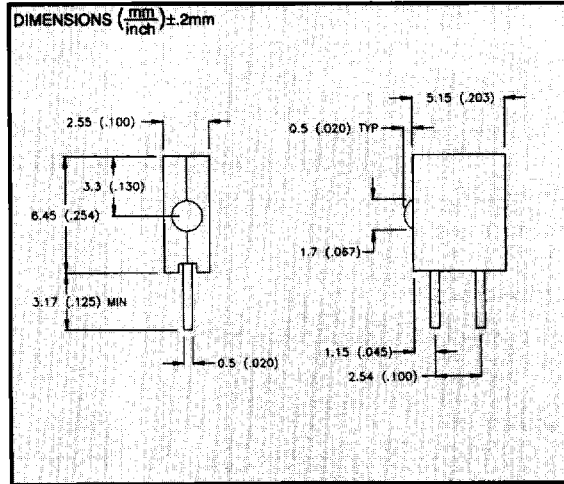

## SSF-LXH4RAXX SERIES P.C. LED T-3 RELAMPABLE

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> <li>Easy P.C. Installation</li> <li>LEDs are Removable</li> <li>Choice of Colors</li> <li>Blinking Type Option</li> </ul>		<ul style="list-style-type: none"> <li>P.C. Mount Indicator</li> <li>Back Lighting Indicator</li> </ul>		<ul style="list-style-type: none"> <li>Holder: Grey Polycarbonate</li> <li>Termination: Tinned Copper</li> <li>Installation: P.C. Mount/Solder</li> </ul>		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED	
SSF-LXH4RA ID	RED	635	10-25	2.1	12	20 SSL-LX3054XX
SSF-LXH4RASRD	RED	660	10-25	1.7	100	20 SSL-LX3054XX
SSF-LXH4RAGD	GREEN	565	10-25	2.1	18	20 SSL-LX3054XX
SSF-LXH4RAYD	YELLOW	585	10-25	2.1	18	20 SSL-LX3054XX
<b>BI-COLOR OPTION</b>						
SSF-LXH4RAHGW	RED/GREEN	695/565	10-25	2.1	8/12	20 SSL-LX3054HGW
<b>BLINKING OPTION</b>						
SSF-LXH4RABID	RED	635	10-20	3-15V	8	9V SSL-LX3054BID

See pages 8 -14 for Max.operating limits and operating curves

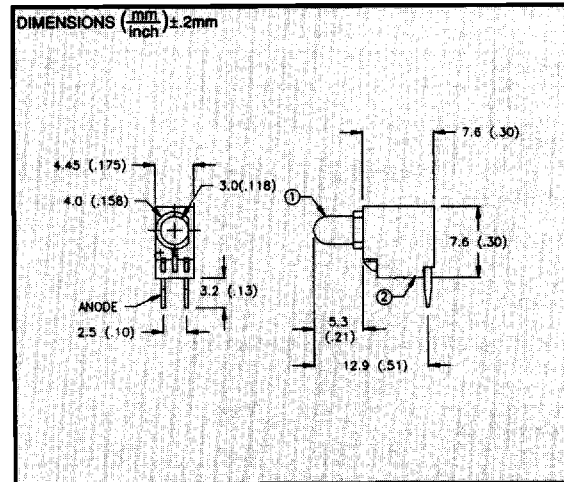

## SSI-LXR1612 SERIES PANEL MOUNT T-3mm LEADS

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> <li>Easy Panel Installation</li> <li>Chrome Plated Metal Holder</li> <li>Choice of Colors</li> <li>Lead Lengths Optional</li> </ul>		<ul style="list-style-type: none"> <li>Panel Indicators</li> <li>Status Indicators</li> <li>Function Status</li> </ul>		<ul style="list-style-type: none"> <li>Holder: Chrome Brass</li> <li>Termination: Pins or Insulated Lead (-150)</li> <li>Installation: 1/4" Panel Hole</li> </ul>		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED	
SSI-LXR1612ID/-150	RED	635	10-25	2.1	20	20 SSL-LX3054XX
SSI-LXR1612SRD/-150	RED	660	10-25	1.7	70	20 SSL-LX3054XX
SSI-LXR1612GD/-150	GREEN	565	10-25	2.1	20	20 SSL-LX3054XX
SSI-LXR1612YD/-150	YELLOW	585	10-25	2.1	20	20 SSL-LX3054XX
<b>BI-COLOR OPTION</b>						
SSI-LXR1612HGW/-150	RED/GREEN	695/565	10-25	2.1	7/7	20 SSL-LX3054HGW
<b>FIXED VOLTAGE OPTION AVAILABLE (2.0/5.0/14.0 VOLTS D.C.)</b>						
SSI-LXR1612ID-5V/-150	RED	635	20 max.	5.0	12	5V SSL-LX3054XX5V
SSI-LXR1612GD-5V/-150	GREEN	565	20 max.	5.0	12	5V SSL-LX3054XX5V
SSI-LXR1612YD-5V/-150	YELLOW	585	20 max.	5.0	12	5V SSL-LX3054XX5V
<b>BLINKING OPTION</b>						
SSI-LXR1612BID/-150	RED	635	10-20	3-15V	8	9V SSL-LX3054BID

See pages 8 -14 for Max.operating limits and operating curves

