

TOSHIBA LED LAMP

**TLG102AKB, TLG102AKW, TLG108AKB, TLG108AKW, TLR102AKB
TLR102AKW, TLR108AKB, TLR108AKW, TLR109AKB, TLR109AKW**

LED LAMP WITH HOLDER


Unit in mm

- Resin stem type LED lamp with holder can easily be mounted into the drill hole on a panel.
- Two types of holder colors are available. These are distinctive by suffix type No.

HOLDER COLOR	SUFFIX TYPE No.
White	KW
Black	KB

- The characteristic of LED lamp with holder are same as the original LED lamps.

PRODUCT NAME	LED LAMPS WITH BRACKET
TLG102AKB	TLG102A
TLG102AKW	
TLG108AKB	TLG108A
TLG108AKW	
TLR102AKB	TLR102A
TLR102AKW	
TLR108AKB	TLR108A
TLR108AKW	
TLR109AKB	TLR109A
TLR109AKW	

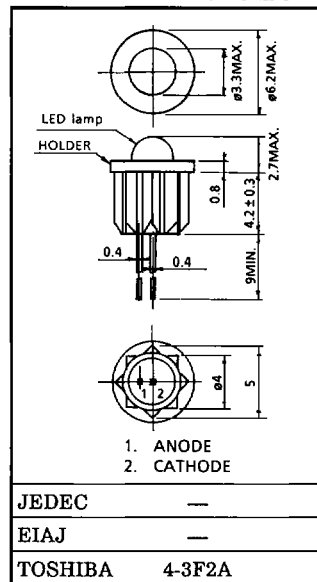

MAXIMUM RATINGS (Ta = 25°C)

PRODUCT NAME	FORWARD CURRENT I _F (mA)	REVERSE VOLTAGE V _R (V)	POWER DISSIPATION P _D (mW)	OPERATING TEMPERATURE T _{opr} (°C)	STORAGE TEMPERATURE T _{stg} (°C)
TLG (102A/108A) KB/KW	30	4	85	-20~75	-30~75
TLR (102A/108A/109A) KB/KW	25	4	70	-20~75	-30~75

961001EAC1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

HANDLING PRECAUTIONS

- Soldering temperature $\leq 260^{\circ}\text{C}$; Soldering time $\leq 3\text{s}$ (Up to 2mm from the body of the device).
- If the lead is formed, the lead should be formed up to 2mm from the body of the device without forming stress to the resin. Soldering should be performed after lead forming.
- Use the printed circuit boards thickness are 4mm or less.
- Holes in the printed circuit boards are 4.7mm diameter.

(Note) This product is made to order.