


SAW Bandpass Filter 20111B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

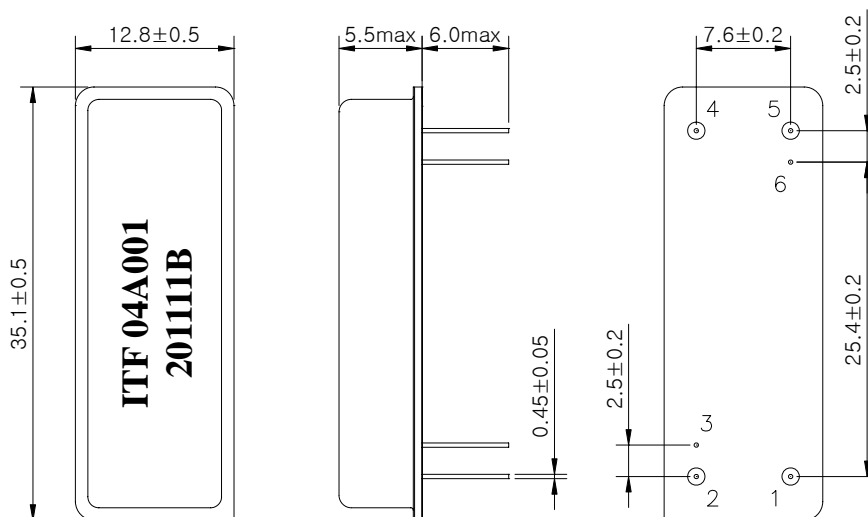

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

| Pin Configuration | |
|-------------------|-------------|
| 1 | Input |
| 5 | Output |
| 2, 4 | Ground |
| 3, 6 | Case ground |

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 20111B | |
| | | Rev. Date | 2004-04-22 | |
| | | Rev. | NI0019-CS03 | 1/5 |

SAW Bandpass Filter 201111B



3. Specifications

Fo = 70 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

| | | Minimum | Typical | Maximum |
|---|--------|---------|---------|---------|
| Center Frequency | MHz | 69.92 | 70.0 | 70.08 |
| Insertion Loss | dB | - | 25.5 | 26.5 |
| 1dB Bandwidth | MHz | - | 3.2 | - |
| 3dB Bandwidth | MHz | 3.5 | 3.75 | - |
| 40dB Bandwidth | MHz | - | 5.5 | 6.0 |
| Amplitude Ripple (Fo +/- 1.23 MHz) | dB | - | 0.8 | 1.1 |
| Group Delay Variation (Fo +/- 1.23 MHz) | nsec | - | 60 | 150 |
| Absolute Delay | usec | - | 3.33 | - |
| Ultimate Rejection | dB | 50 | 55 | - |
| Temperature Coefficient of Frequency | ppm/°C | - | -23 | - |

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 201111B | |
| | | Rev. Date | 2004-04-22 | |
| | | Rev. | NI0019-CS03 | 2/5 |

SAW Bandpass Filter 201111B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

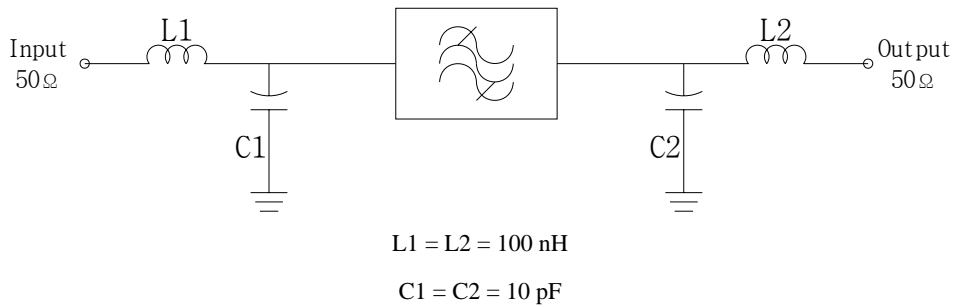

5. Marking Configuration

ITF¹⁾04A001²⁾
201111B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 201111B | |
| | | Rev. Date | 2004-04-22 | |
| | | Rev. | NI0019-CS03 | 3/5 |

SAW Bandpass Filter 20111B



6. Typical Performance (at +25°C)

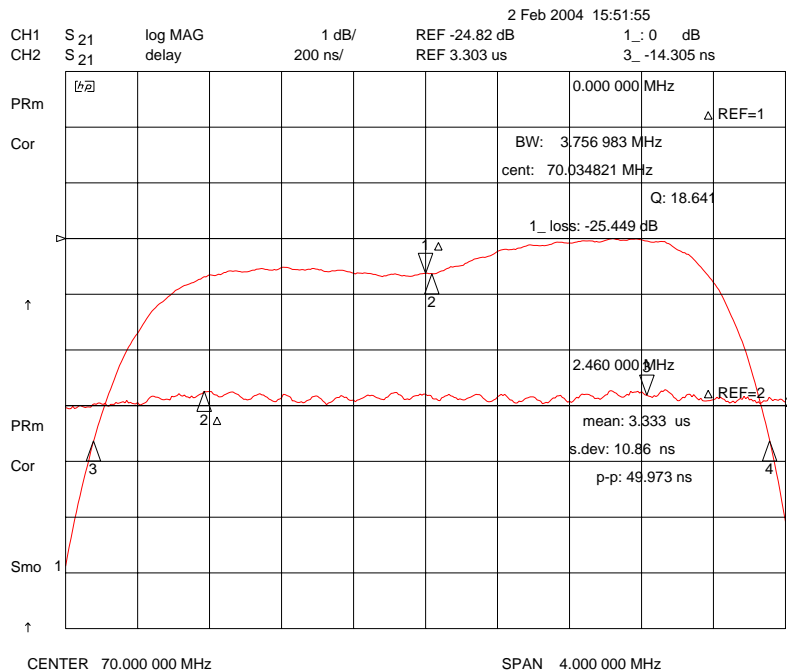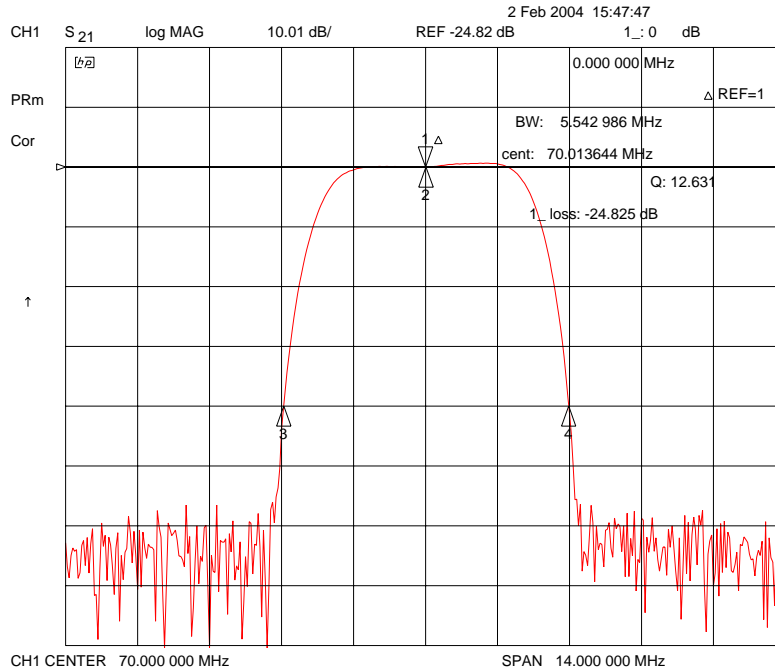

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

20111B

Rev. Date





2004-04-22

Rev.

NI0019-CS03

4/5

SAW Bandpass Filter 201111B

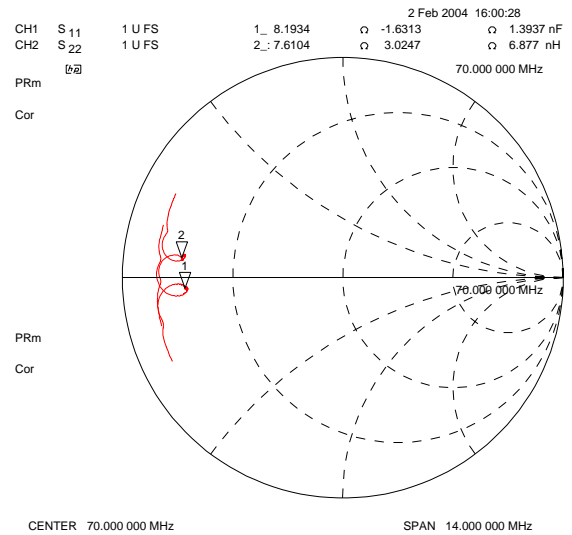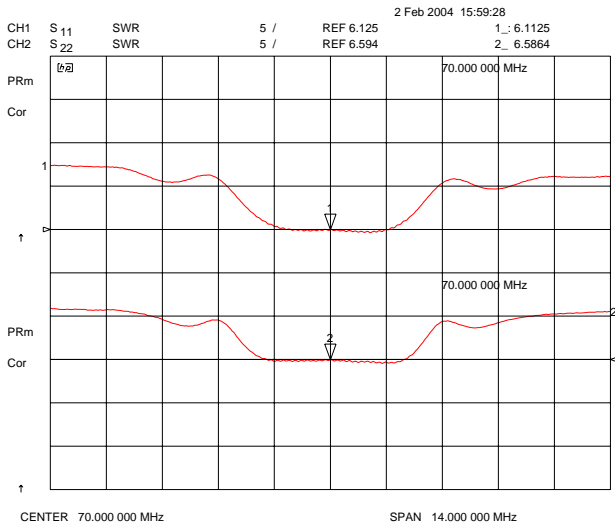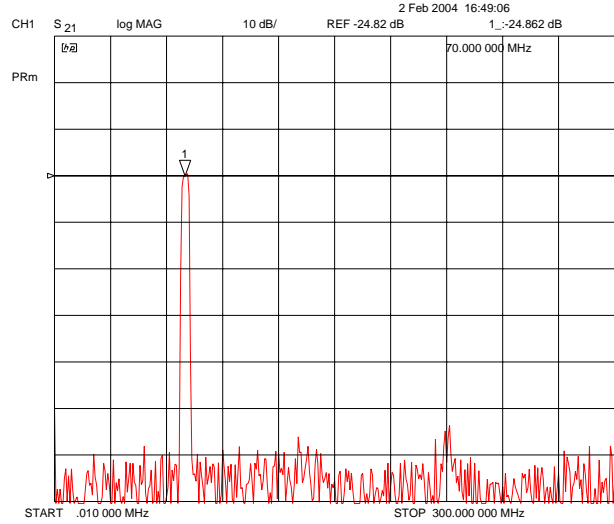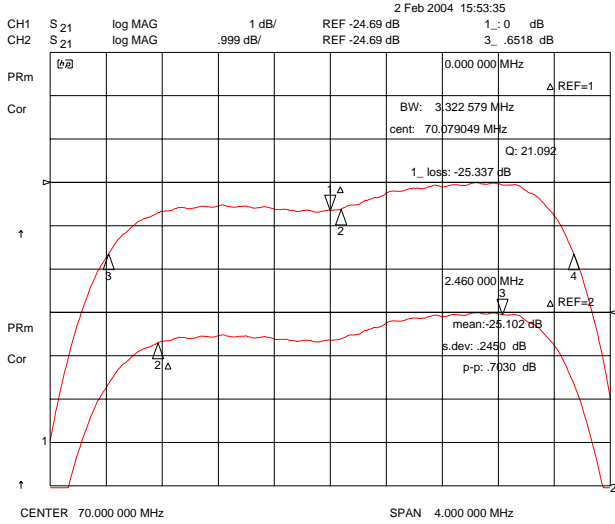

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

| | | |
|-----------|-------------|-----|
| Part No. | 201111B | |
| Rev. Date | 2004-04-22 | |
| Rev. | NI0019-CS03 | 5/5 |