

**FEATURES**

- Wide temperature rating
- 2 lead TO-39 package
- Ideal for hi temp industrial applications
- Isolated case
- RoHS and REACH compliant



**ELECTRO-OPTICAL CHARACTERISTICS AT 25°C**

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Total Power Output, P <sub>o</sub>	I <sub>F</sub> = 500mA	70	120		mW
Peak Emission Wavelength, λ <sub>p</sub>	I <sub>F</sub> = 50mA		850		nm
Spectral Bandwidth at 50%, Δλ	I <sub>F</sub> = 50mA		40		nm
Half Intensity Beam Angle, θ	I <sub>F</sub> = 50mA		110		Deg
Forward Voltage, V <sub>F</sub>	I <sub>F</sub> = 500mA		1.7	2	Volts
Reverse Breakdown Voltage, V <sub>R</sub>	I <sub>R</sub> = 10μA	5	30		Volts
Capacitance, C	V <sub>R</sub> = 0V				pF
Rise Time			20		nsec
Fall Time			20		nsec

**ABSOLUTE MAXIMUM RATINGS AT 25°C CASE**

Power Dissipation <sup>1</sup>	1000mW
Continuous Forward Current	500mA
Peak Forward Current (10μs, 200Hz) <sup>2</sup>	1.5A
Reverse Voltage	5V
Lead Soldering Temperature (1/16" from case for 10sec)	260°C

<sup>1</sup>Derate per Thermal Derating Curve above 25°C

<sup>2</sup>Derate linearly above 25°C


**THERMAL PARAMETERS**

Storage and Operating Temperature Range	-65°C to 150°C
Maximum Junction Temperature	150°C
Thermal Resistance, R <sub>THJA</sub>	150°C/W Typical
Thermal Resistance, R <sub>THJC</sub>	60°C/W Typical



750 Mitchell Road, Newbury Park, California 91320  
 Phone: (805) 499-0335, Fax: (805) 499-8108  
 Email: sales@optodiode.com, Website: www.optodiode.com

MAXIMUM RATINGS

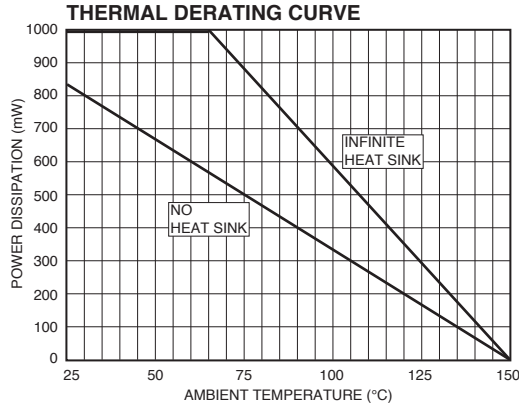

TYPICAL CHARACTERISTICS

