
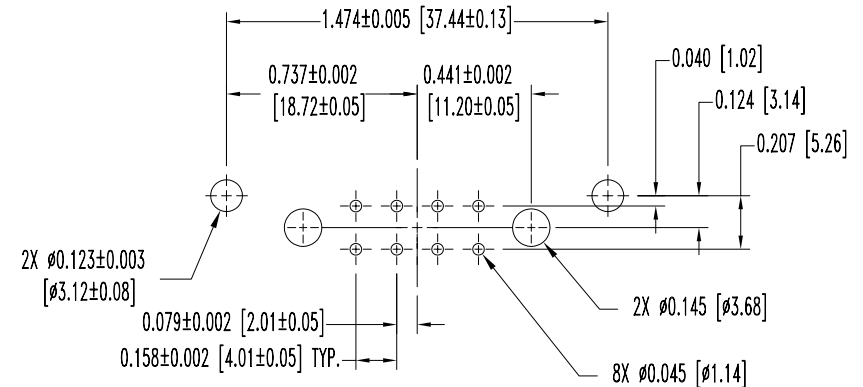
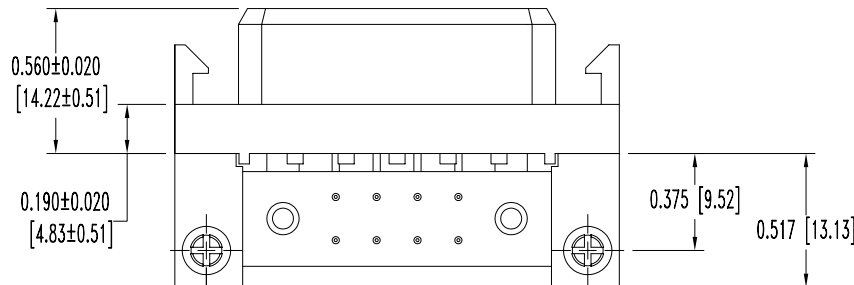
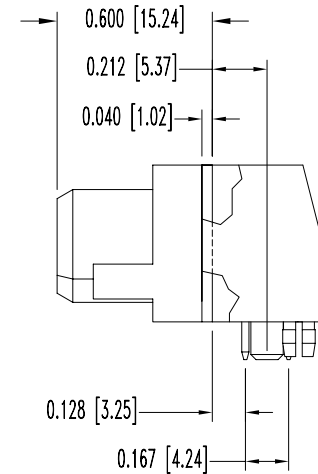


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8822

DATE	REV	REVISION RECORD	APP	DR	CK
8-6-07	NC	ECO 28277	RCW	YK	COLE

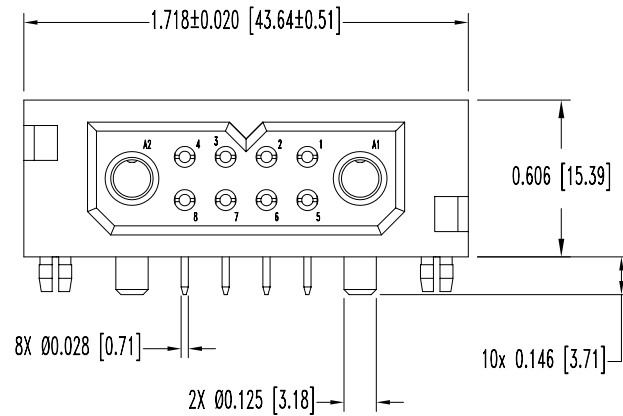

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:


INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL.
MOUNTING BRACKET/ALIGNMENT BAR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
PUSH-ON FASTENER: SPRING TEMPERED COPPER ALLOY, TIN PLATE.
MOUNTING SCREWS: STEEL, ZINC PLATE.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING - POWER: 85 AMPS. SIGNAL: 7.5 AMPS PER UL 1977.
INITIAL CONTACT RESISTANCE - POWER: 0.0003 OHMS MAX. SIGNAL: 0.008 OHMS MAX. PER IEC 512-2, TEST 2b.
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 300 VAC.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
 DECIMAL TOL. ± 0.015 [0.38]	PCS SERIES	SCALE N.T.S.	DRAWN BY YK
	TITLE PLBH10W2F4B3N0A1	APPROVED BY RCW	
ANGULAR TOL. ± 5°	DATE 8-6-07	DRAWING NUMBER SK8822	REV. NC