



880154 TO 880159

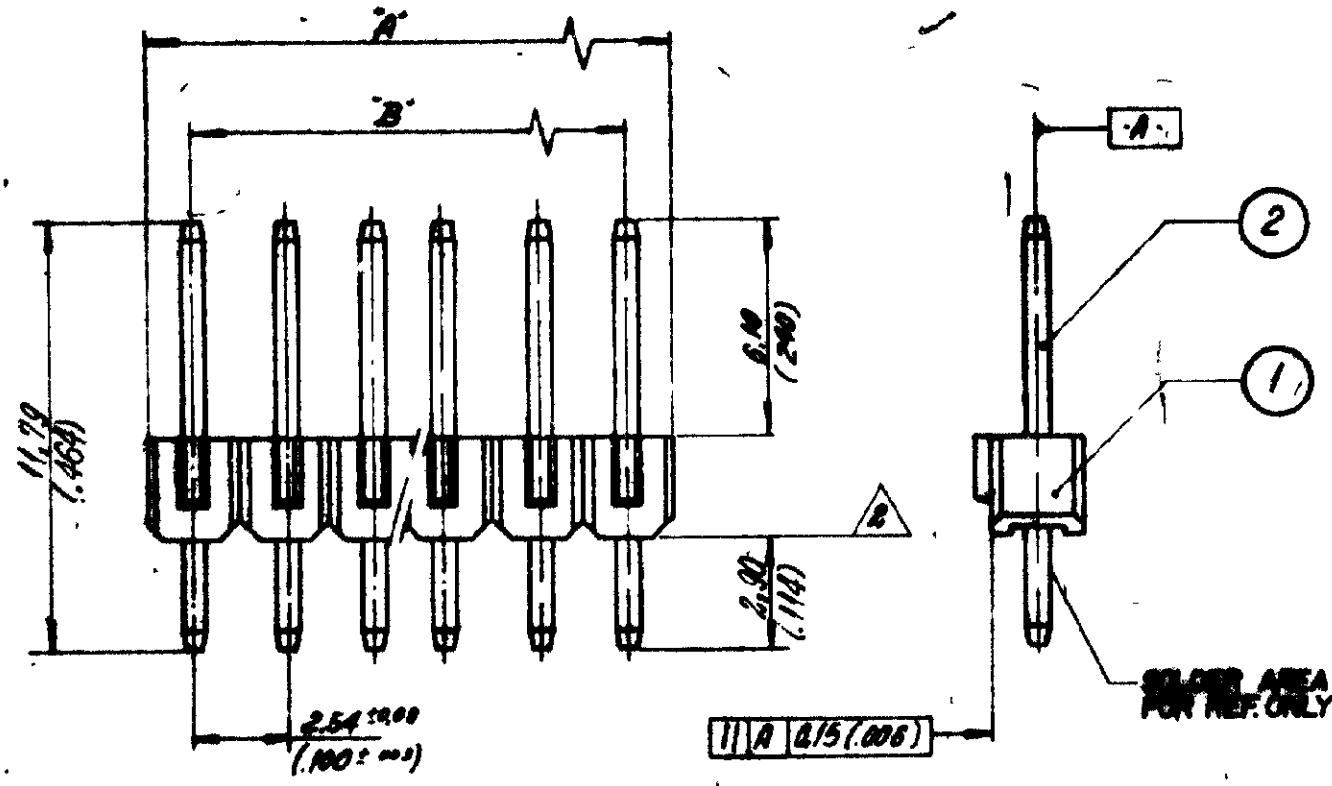

TYPE 1

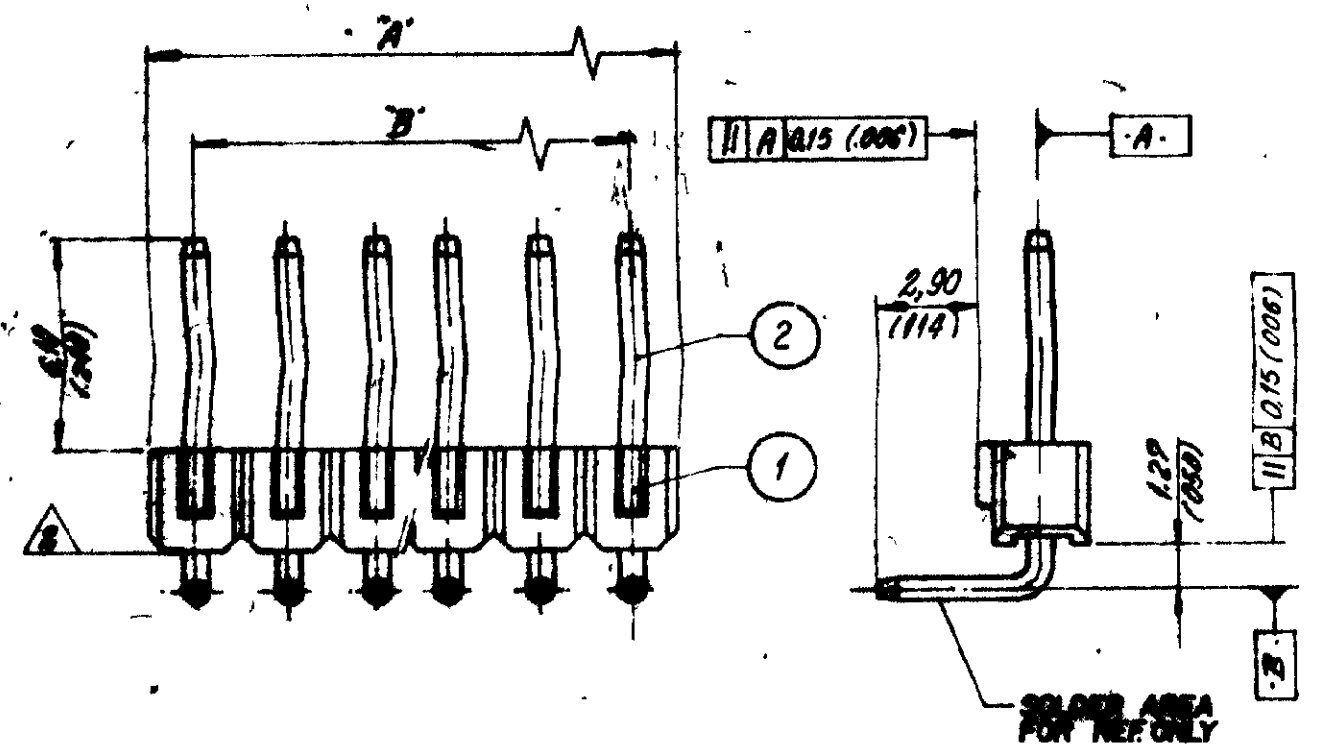

TYPE 2

NOTE:
1- POST RETENTION FORCE MUST NOT BE LESS THAN 1,5 Kg.
2- HEADER DIM MUST BE ACCORDING TO AMP SPECIFICATION 10R-85044

COMPONENTS		880170-1		880170-1		880170-1		880170-1		880170-1		880170-1	
HEADER MODU		880170-1		880170-1		880170-1		880170-1		880170-1		880170-1	
BANDOLEER CONTACT		3-881343-2		3-881343-3		3-881343-4		3-881343-8		3-881343-3		3-881343-4	
PIN		TYPE 1		TYPE 1		TYPE 1		TYPE 2		TYPE 2		TYPE 2	
A (mm) B (mm)		PART NUMBER ASY		PART NUMBER ASY		PART NUMBER ASY		PART NUMBER ASY		PART NUMBER ASY		PART NUMBER ASY	
1 2.54 (100)	—	880154 - 1	880155 - 1	880156 - 1	880157 - 1	880158 - 1	880159 - 1	880154 - 1	880155 - 1	880156 - 1	880157 - 1	880158 - 1	880159 - 1
2 5.08 (200)	2.54 (100)	880154 - 2	880155 - 2	880156 - 2	880157 - 2	880158 - 2	880159 - 2	880154 - 2	880155 - 2	880156 - 2	880157 - 2	880158 - 2	880159 - 2
3 2.54 (100)	5.08 (200)	—	—	—	—	—	—	—	—	—	—	—	—
4 2.54 (100)	7.62 (300)	—	—	—	—	—	—	—	—	—	—	—	—
5 2.54 (100)	10.16 (400)	—	—	—	—	—	—	—	—	—	—	—	—
6 2.54 (100)	12.70 (500)	—	—	—	—	—	—	—	—	—	—	—	—
7 2.54 (100)	15.24 (600)	—	—	—	—	—	—	—	—	—	—	—	—
8 2.54 (100)	17.78 (700)	—	—	—	—	—	—	—	—	—	—	—	—
9 2.54 (100)	20.32 (800)	—	—	—	—	—	—	—	—	—	—	—	—
10 2.54 (100)	22.86 (900)	—	—	—	—	—	—	—	—	—	—	—	—
11 2.54 (100)	25.40 (1000)	—	—	—	—	—	—	—	—	—	—	—	—
12 2.54 (100)	27.94 (1100)	—	—	—	—	—	—	—	—	—	—	—	—
13 2.54 (100)	30.48 (1200)	—	—	—	—	—	—	—	—	—	—	—	—
14 2.54 (100)	33.02 (1300)	—	—	—	—	—	—	—	—	—	—	—	—
15 2.54 (100)	35.56 (1400)	—	—	—	—	—	—	—	—	—	—	—	—
16 2.54 (100)	38.10 (1500)	—	—	—	—	—	—	—	—	—	—	—	—
17 2.54 (100)	40.64 (1600)	—	—	—	—	—	—	—	—	—	—	—	—
18 2.54 (100)	43.18 (1700)	—	—	—	—	—	—	—	—	—	—	—	—
19 2.54 (100)	45.72 (1800)	—	—	—	—	—	—	—	—	—	—	—	—
20 2.54 (100)	48.26 (1900)	—	—	—	—	—	—	—	—	—	—	—	—
21 2.54 (100)	50.80 (2000)	—	—	—	—	—	—	—	—	—	—	—	—
22 2.54 (100)	53.34 (2100)	—	—	—	—	—	—	—	—	—	—	—	—
23 2.54 (100)	55.88 (2200)	—	—	—	—	—	—	—	—	—	—	—	—
24 2.54 (100)	58.42 (2300)	—	—	—	—	—	—	—	—	—	—	—	—
25 2.54 (100)	60.96 (2400)	—	—	—	—	—	—	—	—	—	—	—	—
26 2.54 (100)	63.50 (2500)	—	—	—	—	—	—	—	—	—	—	—	—
27 2.54 (100)	66.04 (2600)	—	—	—	—	—	—	—	—	—	—	—	—
28 2.54 (100)	68.58 (2700)	—	—	—	—	—	—	—	—	—	—	—	—
29 2.54 (100)	71.12 (2800)	—	—	—	—	—	—	—	—	—	—	—	—
30 2.54 (100)	73.66 (2900)	—	—	—	—	—	—	—	—	—	—	—	—
31 2.54 (100)	76.20 (3000)	—	—	—	—	—	—	—	—	—	—	—	—
32 2.54 (100)	78.74 (3100)	—	—	—	—	—	—	—	—	—	—	—	—
33 2.54 (100)	81.28 (3200)	—	—	—	—	—	—	—	—	—	—	—	—
34 2.54 (100)	83.82 (3300)	—	—	—	—	—	—	—	—	—	—	—	—
35 2.54 (100)	86.36 (3400)	—	—	—	—	—	—	—	—	—	—	—	—
36 2.54 (100)	88.90 (3500)	—	—	—	—	—	—	—	—	—	—	—	—
37 2.54 (100)	91.44 (3600)	—	—	—	—	—	—	—	—	—	—	—	—
38 2.54 (100)	93.98 (3700)	—	—	—	—	—	—	—	—	—	—	—	—
39 2.54 (100)	96.52 (3800)	—	—	—	—	—	—	—	—	—	—	—	—
40 2.54 (100)	99.06 (3900)	—	—	—	—	—	—	—	—	—	—	—	—
41 2.54 (100)	101.60 (4000)	—	—	—	—	—	—	—	—	—	—	—	—
42 2.54 (100)	104.14 (4100)	—	—	—	—	—	—	—	—	—	—	—	—
43 2.54 (100)	106.68 (4200)	—	—	—	—	—	—	—	—	—	—	—	—
44 2.54 (100)	109.22 (4300)	—	—	—	—	—	—	—	—	—	—	—	—
45 2.54 (100)	111.76 (4400)	—	—	—	—	—	—	—	—	—	—	—	—
46 2.54 (100)	114.30 (4500)	—	—	—	—	—	—	—	—	—	—	—	—
47 2.54 (100)	116.84 (4600)	—	—	—	—	—	—	—	—	—	—	—	—
48 2.54 (100)	119.38 (4700)	—	—	—	—	—	—	—	—	—	—	—	—
49 2.54 (100)	121.92 (4800)	—	—	—	—	—	—	—	—	—	—	—	—
50 2.54 (100)	124.46 (4900)	—	—	—	—	—	—	—	—	—	—	—	—

OTHER TREATMENT		FINISH		MATERIAL		PART NUMBER	
UNLESS OTHERWISE SPECIFIED		REMOVE BURRS, BREAK SHARP EDGES, D.O. RAD MAX 0.25		1 DEC PLACE = 0.05		2 DEC PLACE = 0.005	
TOTAL SURFACE AREA		INS DIA RANGE		WIRE GAUGE		SCALE	
30-40		30-40		30-40		30-40	
F. BANGED BY ECU		30-40		DIE / MOULD / STRIP / DO		AMP do BRASIL LTDA	
G. BANGED BY ECU		30-40		FIRST USED		São Paulo, Brasil	
H. BANGED BY ECU		30-40		OR		DESCRIPTION	
I. BANGED BY ECU		30-40		23-45		AMP MOD II PIN HEADER	
J. BANGED BY ECU		30-40		23-45		SINGLE ROW (ROUND POST)	
K. BANGED BY ECU		30-40		23-45		AMP	
L. BANGED BY ECU		30-40		23-45		AP A2 880154 TO 880159	
M. BANGED BY ECU		30-40		23-45		1..1	

USED ON

-
- Home

Part Number Search

Document Search

Text Search

Alternate Part Search

Multiple Part Comparison

Alphabetical Search

Brand Search

Industry Product Search

Product Type Search

Product Family Search

Competitor Cross Reference

Lead Free Solutions

Help/Glossary

Current Brand View

AMP

View All Tyco Electronics Brands

Click to activate links to all other products

AMPMODU

.100 & .150 Centerline Through Hole Headers

AMP880154-1ActiveActive

(Tyco Electronics P/N: 880154-1)

Search for Parts |

Previous

1

2

3

Next

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
General Info Sales Info Assembly Subcontractors	Pricing Product Availability	

Searchable Features:	
Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	1
Mount Angle:	Vertical
PCB Retention Feature:	Without
Surface Mount Compatible:	No
Contact Mating Area Plating:	Gold (15)
Board Standoff:	Without
Mounting Ears:	Without
Panel Attachment:	No
Mating Connector Lock:	Without
High Temperature Housing:	No
High Speed Serial Data Connector:	No

Other Properties:	
Mating Post Length (mm [in]):	6.10 [0.240]
Contact Termination Area Plating:	Tin-Lead over Nickel
Gender:	Header

Termination Post Length (mm [in]):	2.90 [0.114]
------------------------------------	--------------

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Customer Service](#) | [About](#) | [Home](#)