

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of ©BERG ELECTRONICS Copyright BERG ELECTRONICS INC.

USB A CABLE STYLE CONNECTOR WITHOUT BACK SHELL

2

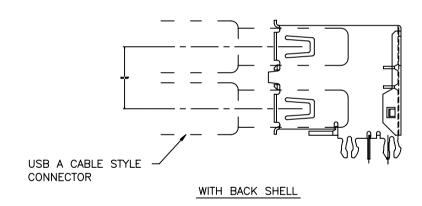

1 | 2

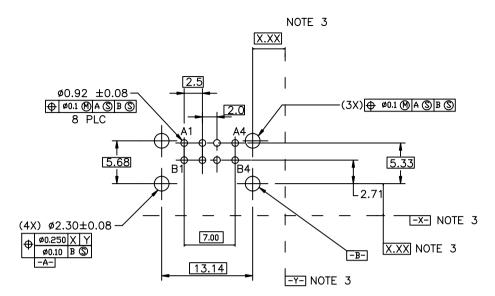

3

RECOMMENDED PC DIMENSIONS

NOTES:

1.MATERIAL:

CONTACTS-COPPER ALLOY SHELL-COPPER ALLOY

HOUSING-UL 94-V-0 RATED THERMOPLASTIC.

2.PLATING:

CONTACTS-0.76um MINIMUM GLOD FLASH OVER PALLADIUM NICKEL IN CONTACT AREA OR 0.76um MIN GOLD FLASH 3.8um MINIMUM TIN-LEAD ON SOLDER TAILS ALL OVER 1.27um MINIMUM NICKEL. SHELL,5um MINIMUM BRIGHT TIN OVER 2.5um MINIMUM NICKEL.


3) DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

4.RECOMMENDED PC BOARD THINKNESS OF 1.57mm.

5.P/N SEE PRODUCT NUMBER CODE. ( TO BE CONTINUED)

mat	tolerances unless otherwise specified							STON		FG) www.fciconnect.com																
ltr	ecn	no	dr date					.X ±.30					COPY			www.fciconnect.com										
AC	N05-	-0068	PH	03/09/05		lineo	ır 🗀	.XX ±.20				projection		title UNIV. SERIAL BUS								l				
AD	N05-0106 PH			04/1	3/05			.XXX ±.10					7 -	1							_	l				
ΑE	N06-	N06-0101 HB 04/13/06				angle	es	0° ±3°					$\bigoplus$			DOUBLE DECK RECEPTACLE										
AF	N06-	06-0133 HB 05/17/06		7/06	dr		PETER			10/97	1	mm			ıct fa		l	JSB			cod	е	ı			
AG	N08-	-0198	R.B	2008/	09/10	engr	R	YL	U	12/1	10/97	_		_	size	dwg	no					1 _				
						chr	R	RYLIU			12/10/97		1		المما	ما 72309		sheet		l						
AB	N04-0086 PH		11/0	9/04	appd	JEI	NN TS	AO	12/1	10/97		<u>2:1</u>		A4							1 (	of 4				
she	sheet revi		ion																							
linde	index she		t									<u> </u>											$ldsymbol{f f f f f f f f f f f f f $			

PDM: Rev:AG 3 STATUS Released 22 25 26 Oct 21, 2008

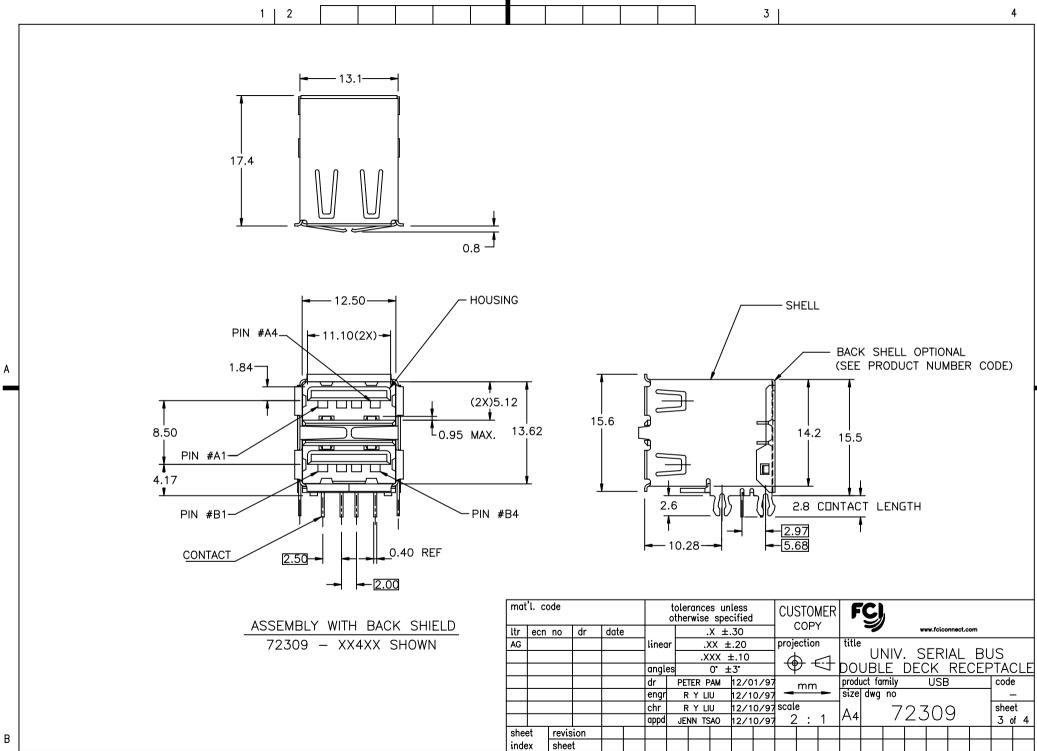

form no. 7530-001-103

1 2


PDM: Rev:AG 3 STATUS Released 22 5 22 5 26 Cot 21, 2008

(CONTINUED)

6. FOR LEAD FREE P/N, A LEAD FREE LABEL WILL APPEAR AT PACKING.

3

- 7. FOR LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- 8. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008

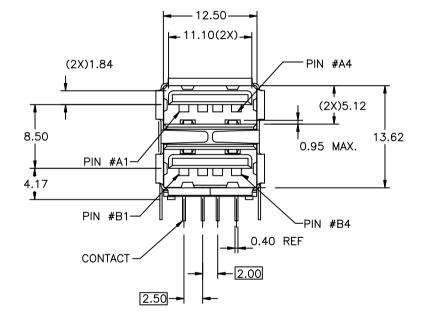

0.8

2

17.0

CONTACT ARMS OPTIONAL

(SEE PRODUCT NUMBER COODE)

13.1-


SHELL 14.2 15.6 15.5 2.8 CONTACT LENGTH 2.6 2.97 5.68 

ASSEMBLY WITHOUT BACK SHIELD 72309-XX3XX SHOWN

1 | 2

	٠, ١٠,																					
mat'l. code						tolerances unless otherwise specified							CUSTOMER			)						
ltr	ecn	no	dr	date		.X ±.30					COPT					www.fciconnect.com						
AG					lineo	r 🗀	.XX ±.20		projection		title		JNIV. SERIAL BU					10				
						.XXX ±.10								UI	VIV.	. S	Βl	BUS PTACLE				
					angle	angles 0° ±					$P \mid A$	ケマ	7	DΟι	JBL	E.	DEC	CK	RE(	CEF	PTA	CLE
					dr	PE	PETER PAM		12/10/9			mm		produ	ıct fa	mily		USB			code	
					engr	engr R Y LIU 12/10/97		<del></del>		size	dwg	no						_				
					chr	chr RYLIU 1		12/1	0/97	scale			ا. ۱	7230				$\circ$		sheet		
					appd	JE	NN TS	AO	12/1	0/97	2:1		1	A4		/ 4		2509		)		of 4
she	et	revision																				
index		sheet																				
																				-		

PDM: Rev:AG 3 STATUS Released 22 5 26 Oct 21, 2008

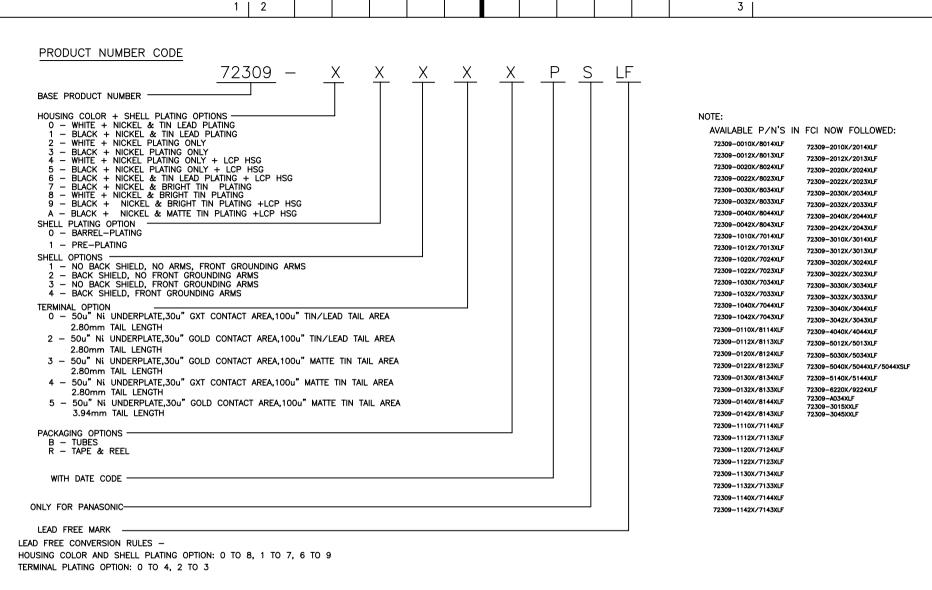

mat'l. code NOTE 1 & 2						tolerances unless otherwise specified							CUSTOMER											
ltr	ecn	no	dr	date	;										www.fciconnect.com									
AG						linea	r 🗀						projection			title UNIV. SERIAL BUS								
				_			_									DOUBLE DECK RECEPTACL							-	
						angles						7		7										
					dr		FUSSELMAN		5/10/96		mm								code	;				
						engr	J	J. DAVID		5/10/96				size	ize dwg no					-				
						chr	J.DAVID		6/29/96		scale		A4	Δ <sub>4</sub> 72309 sheet					et					
						appd		J.DAVID		6/29/96		2:1			M4	44 / 2000   4 of					f 4			
she	et	revis	revision																					
inde	index		sheet																					

PDM: Rev:AG

status**Released** 225 26 Oct 21, 2008

1 2