



## LD-405-200



### TECHNICAL DATA

## Violet Laser Diode

#### Features

- Peak Wavelength: 405 nm
- Optical Output Power: 200 mW
- Multi Transverse Mode
- Package: 5.6 mm, without Photodiode



#### Electrical Connection

Pin Configuration	Bottom View								
<table border="1"> <thead> <tr> <th>PIN</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>LD Anode</td> </tr> <tr> <td>2</td> <td>case</td> </tr> <tr> <td>3</td> <td>LD Cathode</td> </tr> </tbody> </table>	PIN	Function	1	LD Anode	2	case	3	LD Cathode	
PIN	Function								
1	LD Anode								
2	case								
3	LD Cathode								

#### Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ )

Item	Symbol	Value	Unit
CW Output Power	$P_O$	250	mW
LD Reverse Voltage	$V_R$ (LD)	5	V
PD Reverse Voltage	$V_R$ (PD)	20	V
Operating Case Temperature *	$T_C$	-10 ... +40	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ... +85	$^\circ\text{C}$

\* Operating Temperature is recommended within 20-30  $^\circ\text{C}$  range.

#### Specifications ( $T_C=25^\circ\text{C}$ )


Item	Symbol	Min.	Typ.	Max.	Unit
<b>Optical Specifications</b>					
CW Output Power	$P_O$	-	-	200	mW
Peak Wavelength *	$\lambda_P$	400	405	410	nm
FWHM Beam Divergence	$\theta_{  }$	8.0	16.0	26.0	deg
	$\theta_{\perp}$	32.0	42.0	50.0	deg
Emission Point Accuracy	Angle $\Delta\theta_{\perp}$	-5.0	-	5.0	deg
<b>Electrical Specifications</b>					
Threshold Current	$I_{th}$	-	100	130	mA
Operating Current	$I_{op}$	-	230	270	mA
Slope Efficiency	$\eta$	1.0	1.5	2.0	W/A
Operating Voltage	$U_{op}$	-	4.2	4.8	V

The above specifications are for reference purpose only and subjected to change without prior notice.



## Package Dimensions


### 5.6 mm Package (Unit:mm)

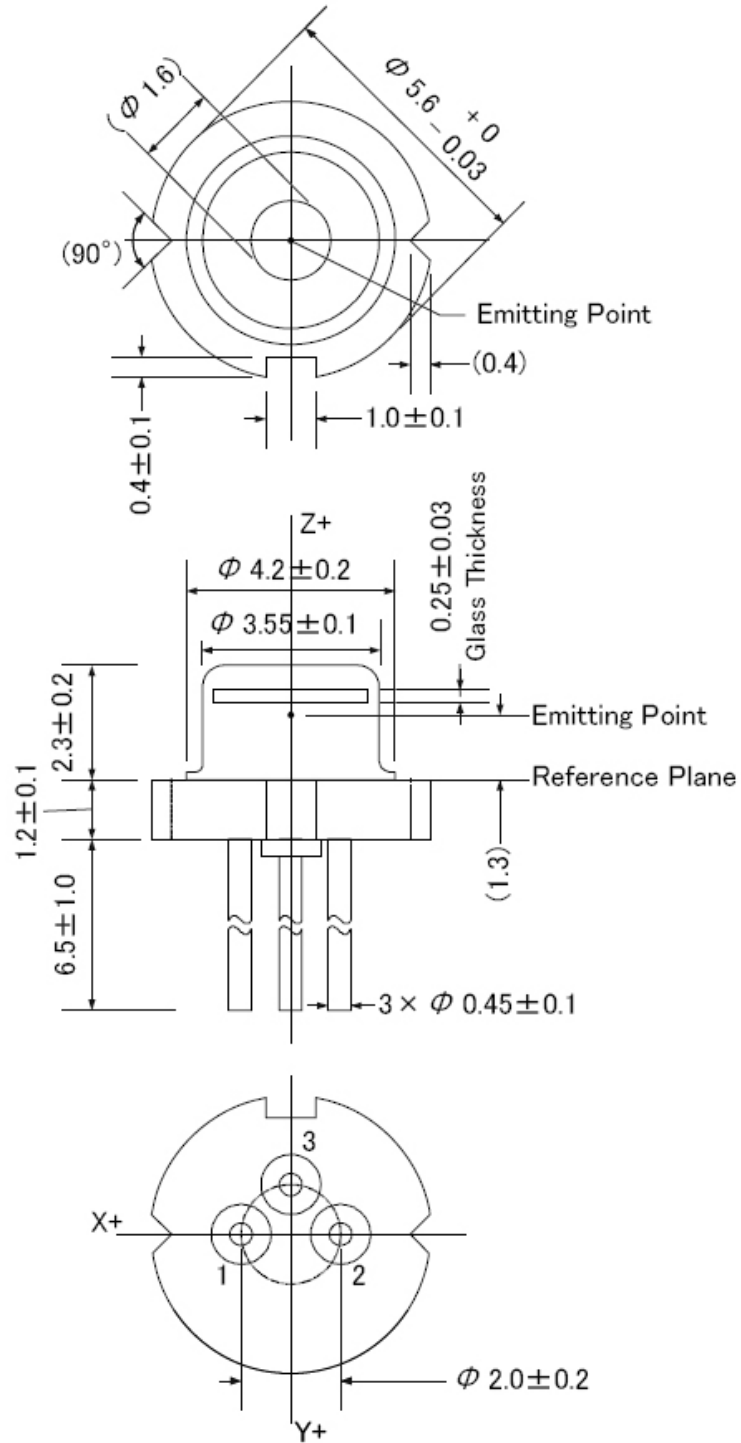




## Typical Characteristics


### Optical Output Power vs. Forward Current

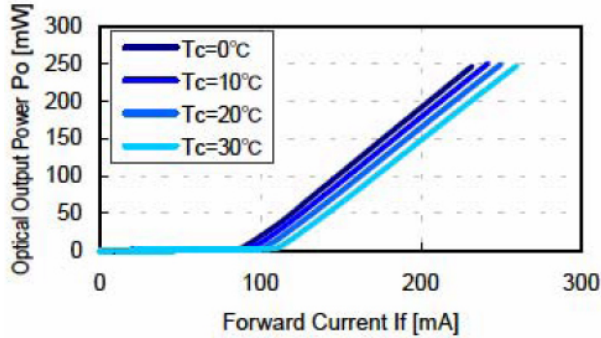


### Forward Voltage vs. Forward Current

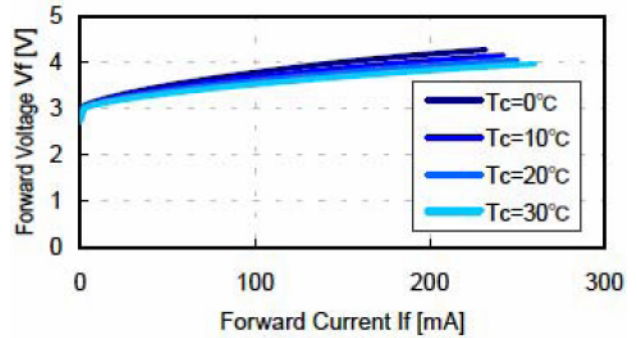


### Threshold Current vs. Case Temperature

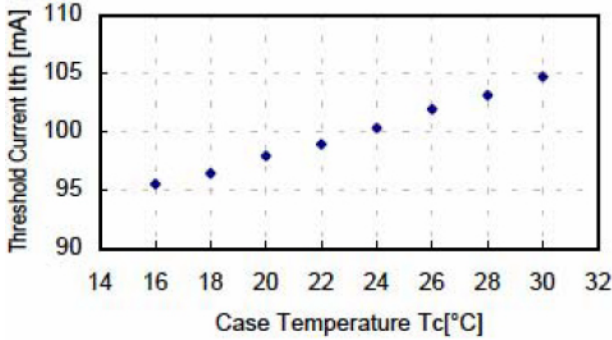


### Peak Wavelength vs. Case Temperature

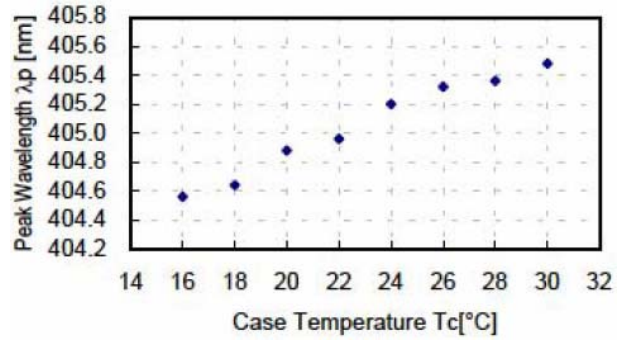


### Far Field Pattern

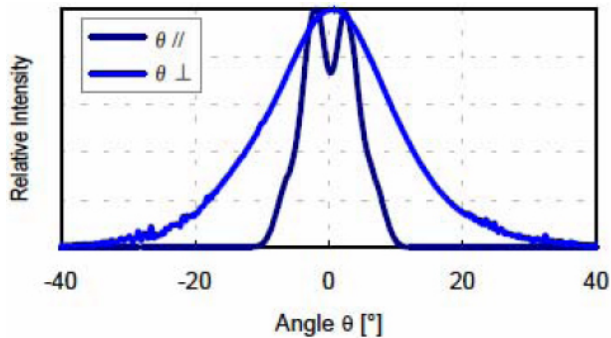


### example.1

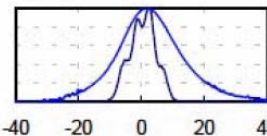


### example.2

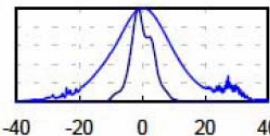


### example.3

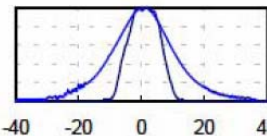


### example.4

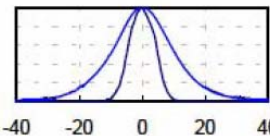


### Typical Spectrum

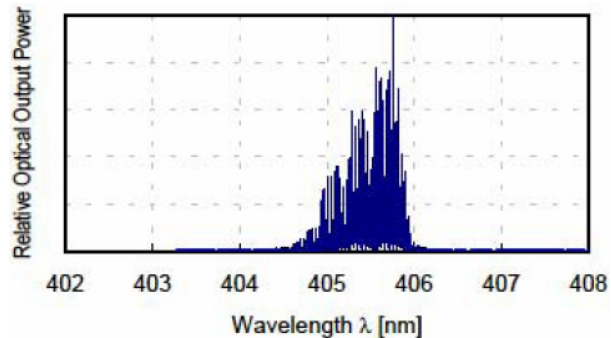


### example.1

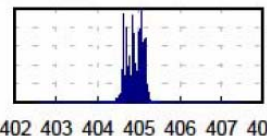

### example.2

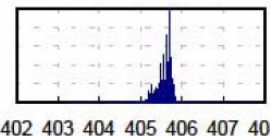

### example.3

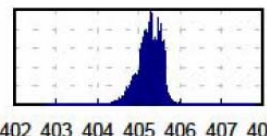

### example.4





## Safety of Laser light

- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.
- These LDs are classified in Class 4 of IEC60825-1 and 21 CFR Part 1040.10 Safety Standards. It is absolutely necessary to take overall safety measures against User's modules, equipment and systems into which this LDs are incorporated and/or integrated.



## Cautions

### 1. Operating methode

- This LD shall change its forward voltage requirement and optical output power according to temperature change. Also, the LD will require more operation current to maintain same output power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by switching on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriate countermeasures to reduce chattering and/or overshooting in the circuit.

### 2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist strap or anti-electrostatic glove when handling the Product.

### 3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.