


## 0.400-INCH SEVEN SEGMENT DISPLAYS

### HIGH EFFICIENCY GREEN MAN4400A SERIES ORANGE MAN4600A SERIES RED MAN4700A SERIES

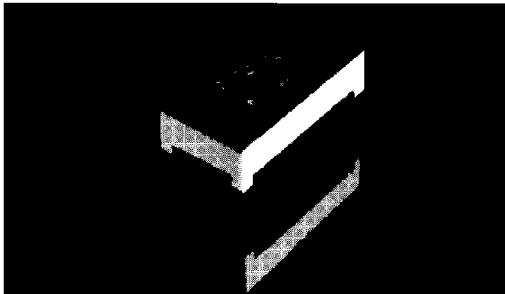

#### FEATURES

- Common anode or common cathode models
- Red, Green and Orange
- Fast switching—excellent for multiplexing
- Low power consumption
- Bold solid segments that are highly legible
- Solid state reliability—long operation life
- Impact resistant plastic construction
- Directly compatible with integrated circuits
- High brightness with high contrast
- Categorized for Luminous Intensity (See Note 6)
- Standard 14 pin dual-in-line package configuration
- Wide angle viewing . . . 150°
- Package size and lead configuration is the same as MAN50A/3600A/70A/80A Series

#### DESCRIPTION

The MAN4400, MAN4600, MAN4700 and MAN4800 Series provides superior brightness in a choice of color LED displays. Standard units are available in Red, Green, and Orange. They can be mounted in arrays with 0.400-inch (10.16 mm) center-to-center spacing. The Green displays are constructed with Grey face and neutral segment color. Red displays have Black faces and Red segment color. Others have face and segment color corresponding to the emitted light.

#### APPLICATIONS

For industrial and consumer applications such as:

- Digital readout displays
- Instrument panels
- Point of sale equipment
- Calculators
- Digital clocks
- High ambient light conditions

MODEL NUMBERS					
PART NUMBER	COLOR	DESCRIPTION	PACKAGE DRAWING	PIN OUT SPECIFICATION	
MAN4410A	Green	Common Anode; Right Hand Decimal	A	A	
MAN4440A	Green	Common Cathode; Right Hand Decimal	A	C	
MAN4610A	Orange	Common Anode; Right Hand Decimal	A	A	
MAN4630A	Orange	Common Anode; Overflow ±1; Right Hand Decimal	B	B	
MAN4640A	Orange	Common Cathode; Right Hand Decimal	A	C	
MAN4705A	Red	Universal (CA or CC) Overflow ±1; Right Hand Decimal	B	D	
MAN4710A	Red	Common Anode; Right Hand Decimal	A	A	
MAN4740A	Red	Common Cathode; Right Hand Decimal	A	C	



## 0.400-INCH SEVEN SEGMENT DISPLAYS

### RECOMMENDED OPTICAL FILTER

For optimum ON and OFF contrast, one of the following filters or equivalents should be used over the display:


DEVICE TYPE	FILTER	DEVICE TYPE	FILTER
MAN4410A MAN4440A	Panelgraphic Green 48	MAN4705A MAN4710A MAN4740A	Panelgraphic Red 60 Homalite 100-1605
MAN4610A MAN4630A MAN4640A	Panelgraphic Scarlet 65 Homalite 100-1670		

NOTE: When using the Grey face MAN4480 or MAN4880 in situations of high ambient light, a neutral density filter can be used to achieve a greater contrast. The following or equivalent can be used: Panelgraphic Grey 10.

### ELECTRO OPTICAL CHARACTERISTICS

(25°C Free Air Temperature Unless Otherwise Specified)

	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
<b>MAN4410A/4440A</b>					
Luminous Intensity, digit average (See Note 1 and 3)	750	3200		μcd	I <sub>f</sub> =10 mA
Peak emission wavelength	562			nm	
Forward voltage					
Segment	2.2	3.0		V	I <sub>f</sub> =20 mA
Decimal point	2.2	3.0		V	I <sub>f</sub> =20 mA
Dynamic resistance					
Segment	12			Ω	I <sub>f</sub> =20 mA
Decimal point	12			Ω	I <sub>f</sub> =20 mA
Capacitance					
Segment	40			pF	V=0
Decimal point	40			pF	V=0
Reverse current					
Segment	100			μA	V <sub>R</sub> =5.0 V
Decimal point	100			μA	V <sub>R</sub> =5.0 V
<b>MAN4610A/4630A/4640A</b>					
Luminous Intensity, digit average (See Note 1 and 3)	510	1800		μcd	I <sub>f</sub> =10 mA
Peak emission wavelength	630			nm	
Forward voltage					
Segment	2.2	2.5		V	I <sub>f</sub> =20 mA
Decimal point	2.2	2.5		V	I <sub>f</sub> =20 mA
Dynamic resistance					
Segment	26			Ω	I <sub>f</sub> =20 mA
Decimal point	26			Ω	I <sub>f</sub> =20 mA
Capacitance					
Segment	35			pF	V=0
Decimal point	35			pF	V=0
Reverse current					
Segment	100			μA	V <sub>R</sub> =5.0 V
Decimal point	100			μA	V <sub>R</sub> =5.0 V



## 0.400-INCH SEVEN SEGMENT DISPLAYS

### **ELECTRO-OPTICAL CHARACTERISTICS**

(25°C Free Air Temperature Unless Otherwise Specified)

	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
<b>MAN4705A/4710A/4740A</b>					
Luminous Intensity, digit average (See Note 1 and 3)	125	350		μcd	I <sub>f</sub> =10 mA
Peak emission wavelength	660			nm	
Forward voltage					
Segment	1.6	2.0		V	I <sub>f</sub> =20 mA
Decimal point	1.6	2.0		V	I <sub>f</sub> =20 mA
Dynamic resistance				Ω	
Segment	2			Ω	I <sub>f</sub> =20 mA
Decimal point	2			Ω	I <sub>f</sub> =20 mA
Capacitance					
Segment	35	80		pF	V=0
Decimal point	35	80		pF	V=0
Reverse current					
Segment	100			μA	V <sub>R</sub> =5.0 V
Decimal point	100			μA	V <sub>R</sub> =5.0 V

### **ABSOLUTE MAXIMUM RATINGS**

	MAN4410A MAN4440A	MAN4705A	MAN4710A MAN4740A
Power dissipation at 25°C ambient . . . . .	600 mW	360 mW	480 mW
Derate linearly from 50°C . . . . .	-12 mW/°C	-5.2 mW/°C	-6.9 mW/°C
Storage and operating temperature . . . . .	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Continuous forward current			
Total . . . . .	240 mA	180 mA	240 mA
Per segment . . . . .	30 mA	30 mA	30 mA
Decimal point . . . . .	30 mA	30 mA	30 mA
Reverse voltage			
Per segment . . . . .	6.0 V	6.0 V	6.0 V
Decimal point . . . . .	6.0 V	6.0 V	6.0 V
Soldering time at 260°C (See Notes 4 and 5) . . . . .	5 sec.	5 sec.	5 sec.
	MAN4630A	MAN4610A MAN4640A	
Power dissipation at 25°C ambient . . . . .	450 mW	600 mW	
Derate linearly from 50°C . . . . .	-6.4 mW/°C	-8.6 mW/°C	
Storage and operating temperature . . . . .	-40°C to +85°C	-40°C to +85°C	
Continuous forward current			
Total . . . . .	180 mA	240 mA	
Per segment . . . . .	30 mA	30 mA	
Decimal point . . . . .	30 mA	30 mA	
Reverse voltage			
Per segment . . . . .	6.0 V	6.0 V	
Decimal point . . . . .	6.0 V	6.0 V	
Soldering time at 260°C (See Notes 4 and 5) . . . . .	5 sec.	5 sec.	

### **TYPICAL THERMAL CHARACTERISTICS**

#### **GREEN/YELLOW**

Thermal resistance junction to free air $\Phi_{JA}$ . . . . .	160°C/W
Wavelength temperature coefficient (case temperature) . . . . .	1.0 Å/°C
Forward voltage temperature coefficient . . . . .	-1.5 mV/°C


#### **RED/ORANGE**

Thermal resistance junction to free air $\Phi_{JA}$ . . . . .	160°C/W
Wavelength temperature coefficient (case temperature) . . . . .	1.0 Å/°C
Forward voltage temperature coefficient . . . . .	-2.0 mV/°C



## 0.400-INCH SEVEN SEGMENT DISPLAYS

### PACKAGE DIMENSIONS

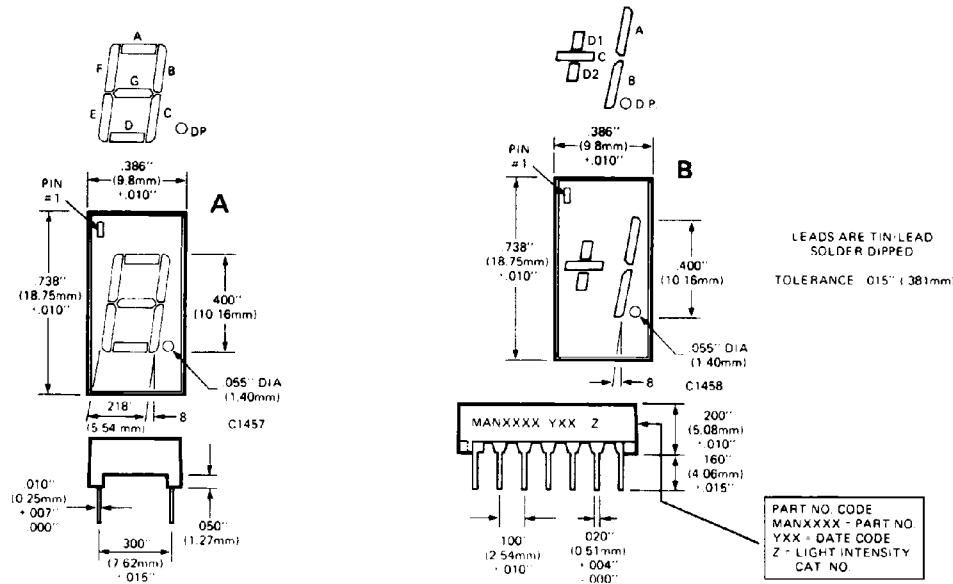

### NOTES

1. The digit average Luminous Intensity is obtained by summing the Luminous Intensity of each segment and dividing by the total number of segments. Intensity will not vary more than  $\pm 33.3\%$  between all segments within a digit.
2. The curve in Figures 3, 6, 9, and 12 is normalized to the brightness at 25°C to indicate the relative Luminous Intensity over the operating temperature range.
3. The decimal point is designed to have the same surface brightness as the segments, therefore, the Luminous Intensity of the decimal point is .3 times the Luminous Intensity of the segments, since the area of the decimal point is .3 times the area of the average segment.
4. Leads of the device immersed to 1/16 inch from the body. Maximum device surface temperature is 140°C.
5. For flux removal, Freon TF, Freon TE, Isopropanol or water may be used up to their boiling points.
6. All displays are categorized for Luminous Intensity. The Intensity category is marked on each part as a suffix letter to the part number.




## 0.400-INCH SEVEN SEGMENT DISPLAYS


### ELECTRICAL CONNECTIONS

PIN NO.	ELECTRICAL CONNECTIONS			
	A MAN4410A/4610A/4710A	B MAN4630A	C MAN4440A/4640A/4740A	D MAN4705A
1	Cathode A	Anode C, D	Anode F	Anode D1
2	Cathode F	No Pin	Anode G	No Pin
3	Common Anode	Anode C, D	No Pin	Cathode D1
4	No Pin	No Pin	Common Cathode	Cathode C
5	No Pin	No Pin	No Pin	Cathode D2
6	No Pin	No Connection	Anode E	Anode D2
7	Cathode E	Cathode D	Anode D	Anode C
8	Cathode D	Cathode C	Anode C	Anode D.P.
9	Cathode D.P.	Cathode D.P.	Anode D.P.	No Pin
10	Cathode C	Cathode B	No Pin	Cathode D.P.
11	Cathode G	Cathode A	No Connection	Cathode B
12	No Pin	No Pin	Common Cathode	Cathode A
13	Cathode B	No Pin	Anode B	Anode A
14	Common Anode	Anode A, B, & D.P.	Anode A	Anode B


### ELECTRICAL SCHEMATIC

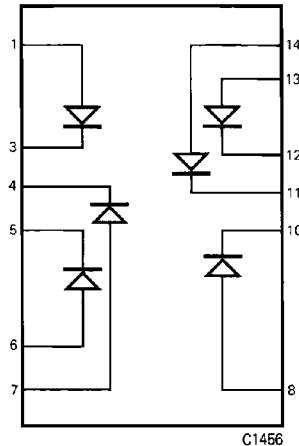

MAN4705A

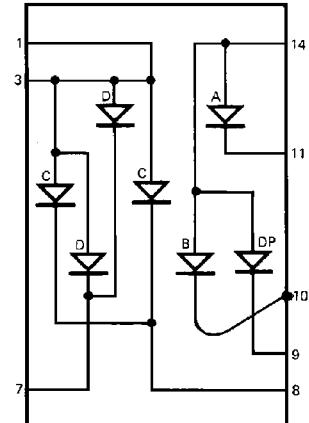

MAN4630A



## 0.400-INCH SEVEN SEGMENT DISPLAYS

### TYPICAL CHARACTERISTIC CURVES

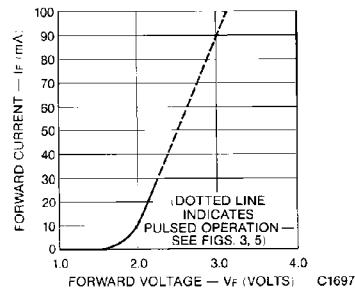


Fig. 1. Forward Current vs.  
Forward Voltage




Fig. 2. Luminous Intensity vs.  
Forward Current




Fig. 3. Relative Luminous Intensity vs.  
Temperature




Fig. 4. Forward Current vs.  
Forward Voltage




Fig. 5. Relative Luminous Intensity vs.  
Temperature




Fig. 6. Forward Current vs.  
Forward Voltage



## 0.400-INCH SEVEN SEGMENT DISPLAYS

### TYPICAL CHARACTERISTIC CURVES (Cont'd)




Fig. 7. Relative Luminous Intensity vs.  
Temperature




Fig. 8. Max Peak Current vs.  
Duty Cycle




Fig. 9. Relative Luminous Intensity vs.  
Duty Cycle




Fig. 10. Max Peak Current vs.  
Duty Cycle




Fig. 11. Relative Luminous Intensity vs.  
Duty Cycle




Fig. 12. Max Peak Current vs.  
Duty Cycle




Fig. 13. Relative Luminous Intensity vs.  
Duty Cycle




Fig. 14. Relative Luminous Intensity vs.  
Forward Current