


DASH NO. M CODE MADE FROM

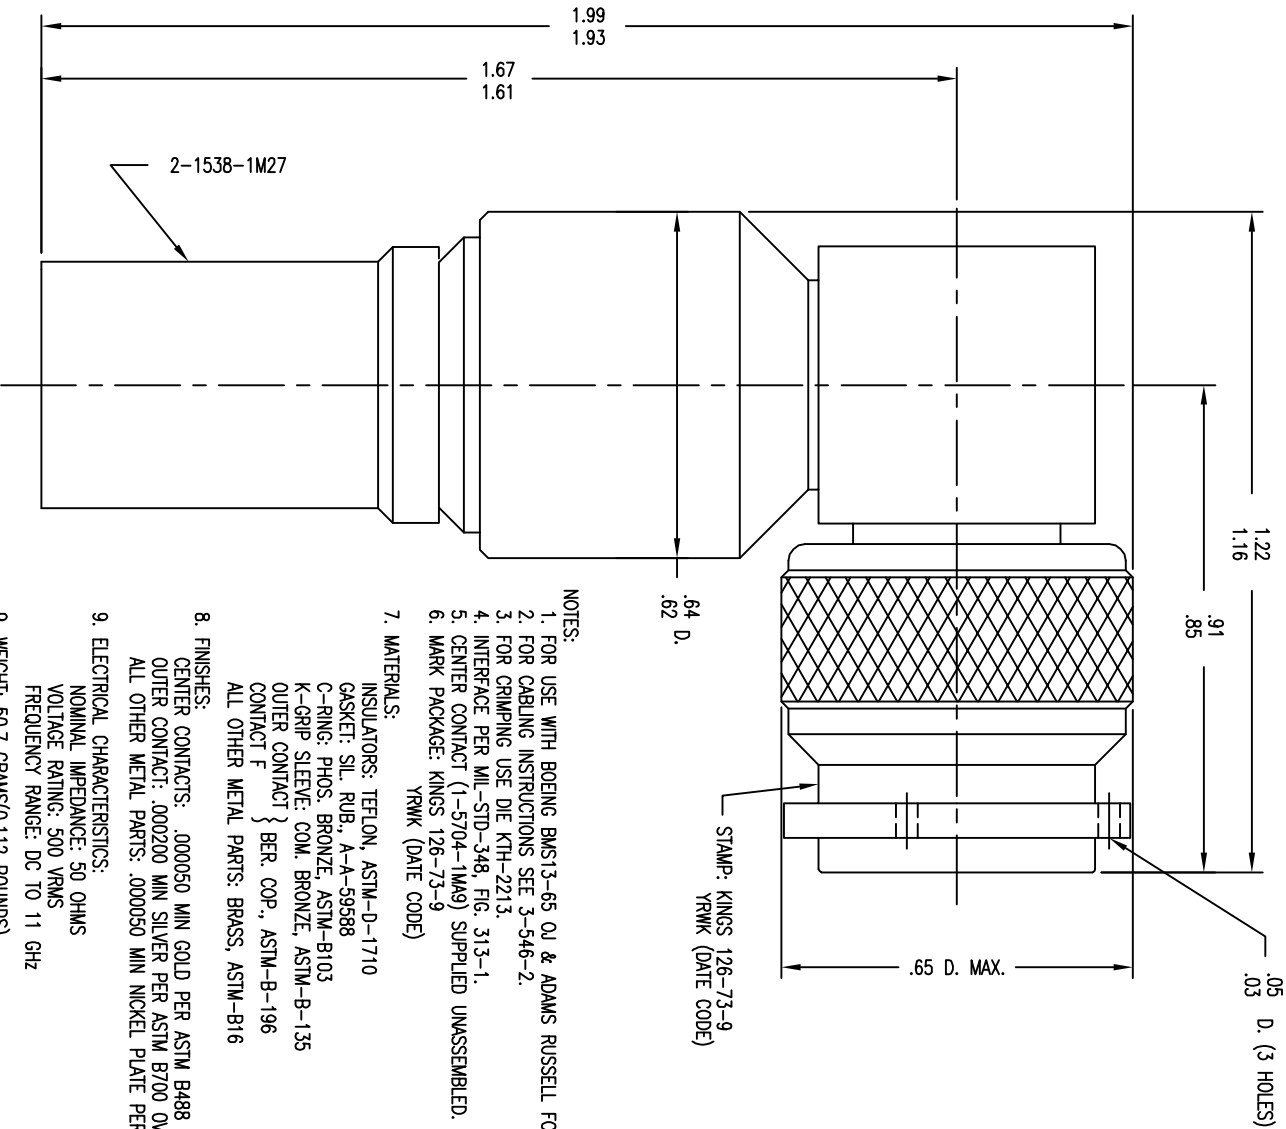

NOTES:

1. FOR USE WITH BOEING BMS13-65 OJ & ADAMS RUSSELL FC38Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2213.
4. INTERFACE PER MIL-STD-348, FIG. 313-1.
5. CENTER CONTACT (1-5704-1MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 126-73-9 YRWK (DATE CODE)
7. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1710
 GASKET: SIL. RUB. A-A-59588
 C-RING: PHOS. BRONZE, ASTM-B103
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 OUTER CONTACT } BER. COP, ASTM-B-196
 CONTACT F }
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
 CENTER CONTACTS: .000050 MIN GOLD PER ASTM B488 OVER .000050 MIN NICKEL PER AMS-QQ-N-290(RoHS)
 OUTER CONTACT: .000200 MIN SILVER PER ASTM B700 OVER .000020 MIN COPPER PER ASTM B734(RoHS)
 ALL OTHER METAL PARTS: .000050 MIN NICKEL PLATE PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734(RoHS)
9. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 11 GHz
9. WEIGHT: 50.7 GRAMS(0.112 POUNDS)

126-73-9

REVISIONS	
ISSUE	CHANGES
0	ER 35661 KH 06/29/94
1	CN 38251 C BDH 03/14/01
C	ER 33785 COL 07/14/11

SALES DRAWING

THIS DRAWING, THE DESIGN AND DATA THEREON, IS THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED TO ANOTHER IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 4:1

APPROX SURFACE AREA

USED ON

CAGE CODE:91836

PLUG, ANGLE, TNC

DRAWN	KH	DATE	06/29/94
DESIGN	JT	DATE	06/30/94
APPR.		DATE	

WINCHESTER
 by WINCHESTER
 Winchester Electronics
 1000 North
 Washington, CT 06492

126-73-9

A
 SIZE