

DIN 47295, Type C

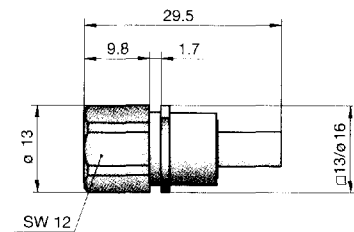
Slide-on Version with Centering Sleeve

DIN 47295, Form C

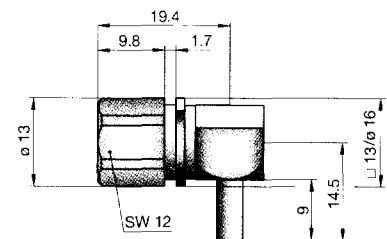
Einschub-Ausführung mit Zentrierhülse

Straight Plug, crimp**Stecker gerade, crimp**

Part Number	Cable Group	Assembly Instruction	Panel Piercing	Crimp-Insert	Remarks	Packing Unit
88 S 115-140 H3	40	88 O2	B 28	11 W 150-504	–	100
88 S 115-141 H3	41	88 O2	B 28	11 W 150-506	–	100
88 S 115-1V2 H3	V2	88 O2	B 28	11 W 150-550	–	100

**Right Angle Plug, solder crimp****Winkelstecker, löt-crimp**

Part Number	Cable Group	Assembly Instruction	Panel Piercing	Crimp-Insert	Remarks	Packing Unit
88 S 213-340 H3	40	88 P	B 28	11 W 150-104	–	100
88 S 213-341 H3	41	88 P	B 28	11 W 150-106	–	100
88 S 213-3V2 H3	V2	88 P	B 28	11 W 150-150	–	100

**DIN 47295, Type F**


Quick-Lock Version

DIN 47295, Form F

Selbstverriegelnde Ausführung

Straight Plug, crimp**Stecker gerade, crimp**

Part Number	Cable Group	Assembly Instruction	Crimp-Insert	Remarks	Packing Unit
88 S 165-1V2 H3	V2	88 O2	11 W 150-550		100

**Right Angle Plug, solder crimp****Winkelstecker, löt-crimp**

Part Number	Cable Group	Assembly Instruction	Crimp-Insert	Remarks	Packing Unit
88 S 263-3V2 H3	V2	88 P	11 W 150-150	–	100

