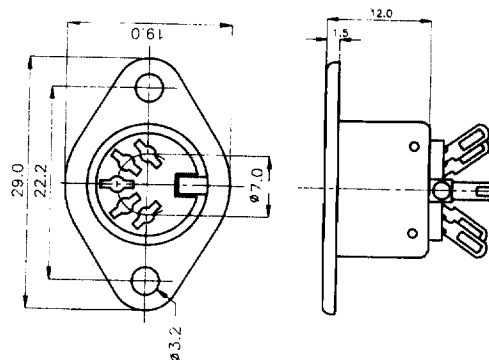





A/D ELECTRONICS, INC.

DIN SOCKET (METAL COVER TYPE)








Specifications:

Insulation Resistance:
100MΩ at 500V D.C.

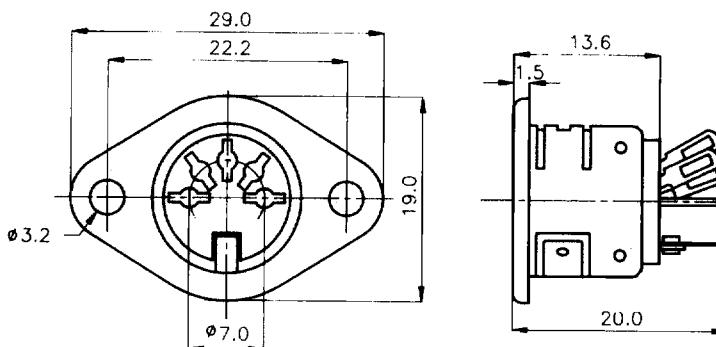

Dielectric Strength:
1000V A.C./1 Minute

Contact Resistance:
20mΩ MAX.

Rating: 100V A.C. 2A

ARRANGEMENT OF CONTACTS					
NO OF CONTACTS	4	5	6	7	8
MODEL NO	ADS-004	ADS-005	ADS-006	ADS-007	ADS-008

DIN SOCKET (METAL COVER TYPE)







Specifications:

Insulation Resistance:
100MΩ at 500V D.C.

Dielectric Strength:
1000V A.C./1 Minute

Contact Resistance:
20mΩ MAX.

Rating: 100V A.C. 2A

ARRANGEMENT OF CONTACTS					
NO OF CONTACTS	4	5	6	7	8
MODEL NO	ADS-044	ADS-045	ADS-046	ADS-047	ADS-048