



# SAW Components

Data Sheet R 714





**SAW Components**

**R 714**

**Resonator**

**423,22 MHz**

**Data Sheet**


Ceramic package **QCC8C**

**Features**

- 1-port resonator
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators

**Terminals**


- Ni, gold plated

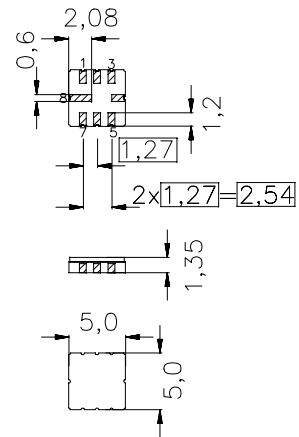

Dimensions in mm, approx. weight 0,1 g

**Pin configuration**

- 2 Input
- 6 Ground
- 4,8 Ground (case)



Type	Ordering code	Marking and Package according to	Packing according to
R 714	B39421-R 714-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T_A$	-45/+120	°C	between any terminals
Storage temperature range	$T_{stg}$	-45/+120	°C	
DC voltage	$V_{DC}$	12	V	
Source power	$P_s$	0	dBm	



**SAW Components**

**R 714**

**Resonator**

**423,22 MHz**

**Data Sheet**

**Characteristics**

Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b> <sup>1)</sup>	$f_c$	423,145	423,22	423,295	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	1,2	1,9	dB
Unloaded quality factor	$Q_U$	6000	11000	—	
<b>Ageing of <math>f_c</math></b>		—	—	$\pm 50$	ppm
<b>Equivalent circuit elements</b>					
Motional capacitance	$C_1$	—	2,228	—	fF
Motional inductance	$L_1$	—	63,47	—	$\mu\text{H}$
Motional resistance	$R_1$	—	15	27	$\Omega$
Parallel capacitance	$C_0$	—	3,4	—	pF
<b>Temperature coefficient of frequency</b> <sup>2)</sup>	$TC_f$	—	- 0,03	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	0	—	30	$^{\circ}\text{C}$

<sup>1)</sup> Center frequency is defined as maximum of the real part of the admittance

<sup>2)</sup> Temperature dependence of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



**SAW Components**

**R 714**

**Resonator**

**423,22 MHz**

**Data Sheet**

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, OFW E UE**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.