



1mm MICRO STRIPS FTM SERIES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?FTM

HI-TEMP









Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Phosphor Bronze
Current Rating: 1.5A @ 80°C ambient
Operating Temp Range: -55°C to +125°C
Plating: Sn or Au over 50µ" (1.27µm) Ni
RoHS Compliant: Yes

Processing:

Max Processing Temp: 230°C for 60 seconds, or 260°C for 20 seconds 3x with Matte Sn plating
Lead-Free Solderable: Yes, with Matte Sn plating
SMT Lead Coplanarity: .004" (0,10mm) max


Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with: CLM, MLE

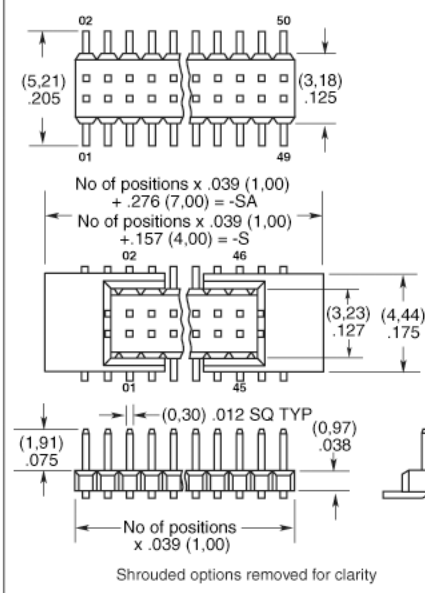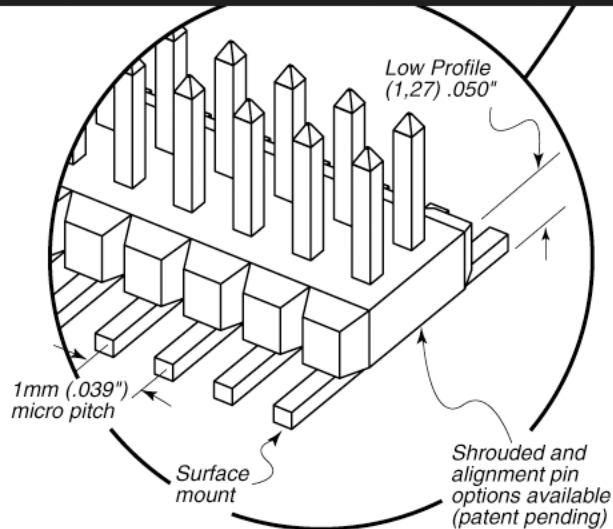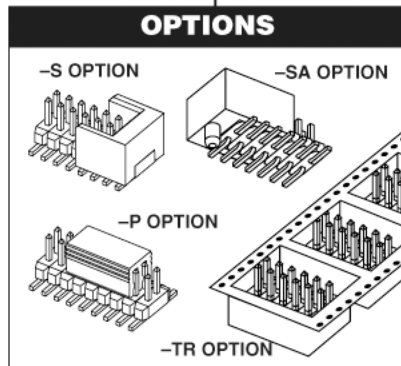

Surface Mount!

TAPE & REEL AVAILABILITY
 No tooling charges.
 125 piece minimum order.
 Order any quantity above minimum.
 In-house design, manufacture.
 Quick turn-around.
 Call Samtec for specifications and ordering information.

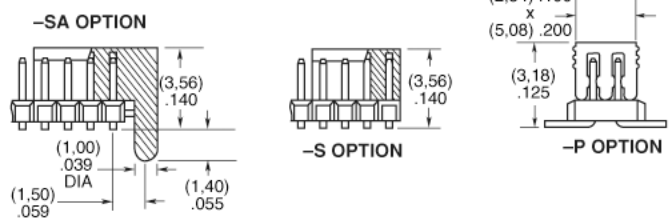

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM