


Ultrafast Recovery Modules HU100, 101 & 102

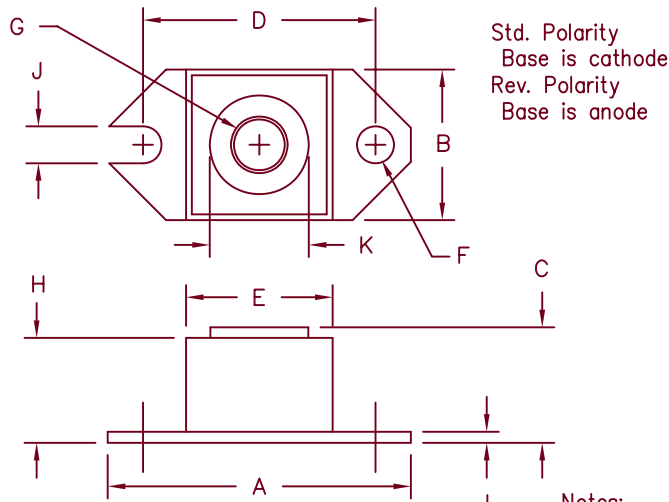

Std. Polarity
Base is cathode
Rev. Polarity
Base is anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.177	1.197	29.90	30.41	
E	.745	.755	18.92	19.18	Sq. Dia.
F	.152	.162	3.86	4.11	
G		1/4-20	UNC-2B		
H	.540	.580	13.72	14.73	
J	.152	.162	3.86	4.11	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Notes:
Baseplate: Nickel plated
copper

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HU10005*	50V	50V
HU10010*	100V	100V
HU10015*	150V	150V
HU10020*	200V	200V
HU10120*	200V	200V
HU10130*	300V	300V
HU10140*	400V	400V
HU10150*	500V	500V
HU10260*	600V	600V
HU10270*	700V	700V
HU10280*	800V	800V

Add Suffix R for Reverse Polarity

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 50 to 800 Volts
- High surge capacity
- 100 Amp current rating

Electrical Characteristics

	HU100	HU101	HU102	
Average forward current	$I_{F(AV)}$ 100A	100A	100A	Square Wave $R_{\theta JC} = 0.5^{\circ}\text{C}/\text{W}$ 8.3ms, half sine, $T_J = 175^{\circ}\text{C}$ $I_{FM} = 100\text{A}$: $T_J = 25^{\circ}\text{C}$ * 1/2A, 1A, 1/4A, $T_J = 25^{\circ}\text{C}$ $V_{RRM, T_J} = 125^{\circ}\text{C}$ $V_{RRM, T_J} = 25^{\circ}\text{C}$ $V_R = 10\text{V}, T_J = 25^{\circ}\text{C}$
Case Temperature	T_C 135°C	120°C	115°C	
Maximum surge current	I_{FSM} 1500A	1400A	1200A	
Max peak forward voltage	V_{FM} .975V	1.25V	1.35V	
Max reverse recovery time	t_{rr} 50ns	70ns	90ns	
Max peak reverse current	I_{RM} ———	6.0mA	———	
Max peak reverse current	I_{RM} ———	50μA	———	
Typical Junction capacitance	C_J 575pF	300pF	275pF	

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance	$R_{\theta JC}$	0.5°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$.012°C/W Case to sink
Terminal Torque		35-40 inch pounds
Mounting base torque - (outside holes)		20-25 inch pounds
Weight		1.1 ounces (32 grams) typical

HU100

Figure 1
Typical Forward Characteristics

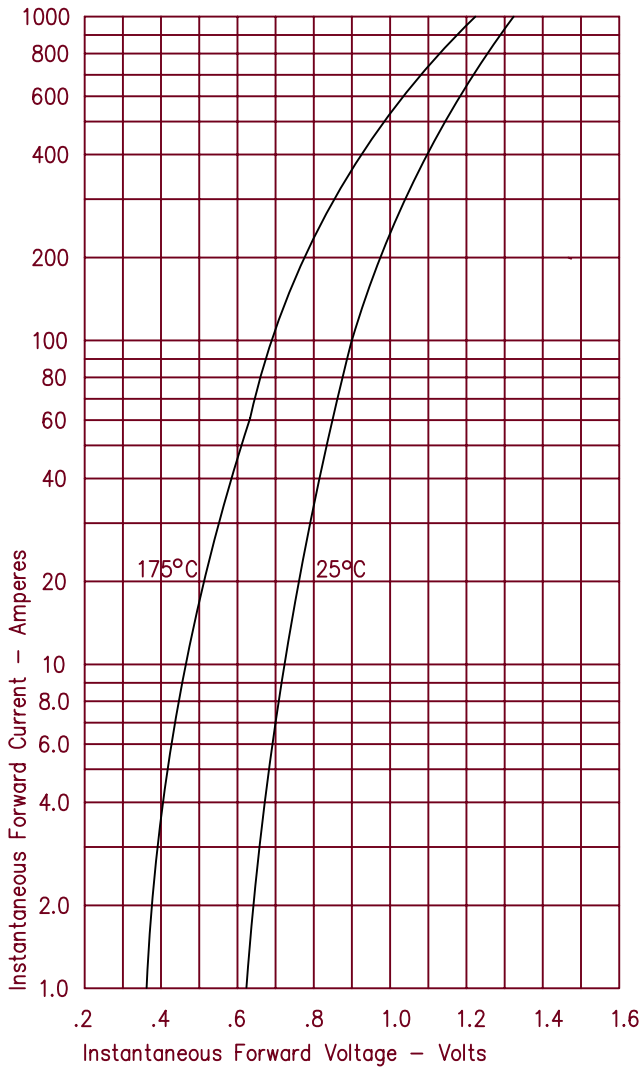


Figure 3
Typical Junction Capacitance

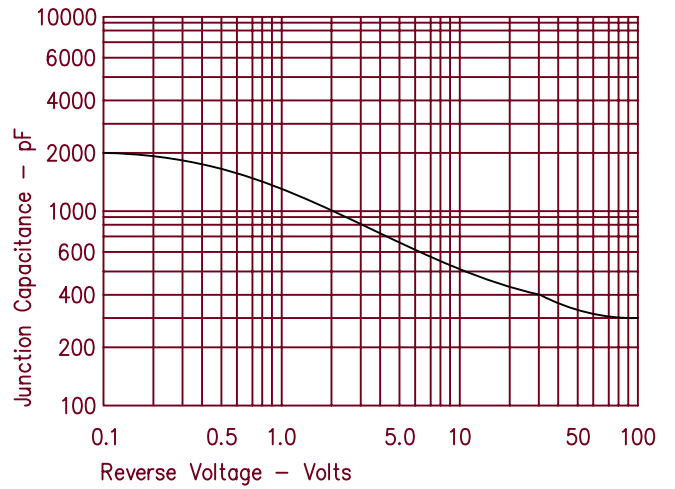


Figure 4
Forward Current Derating

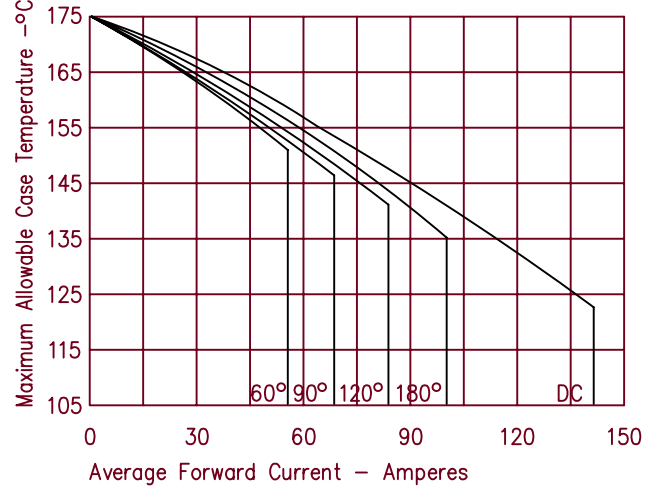


Figure 2
Typical Reverse Characteristics


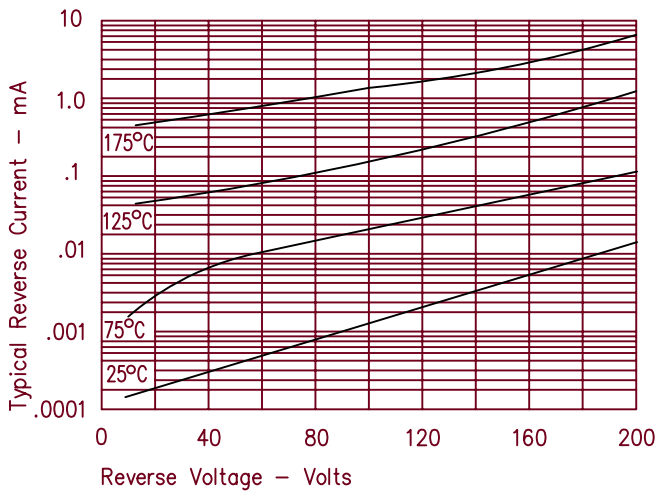


Figure 5
Maximum Forward Power Dissipation

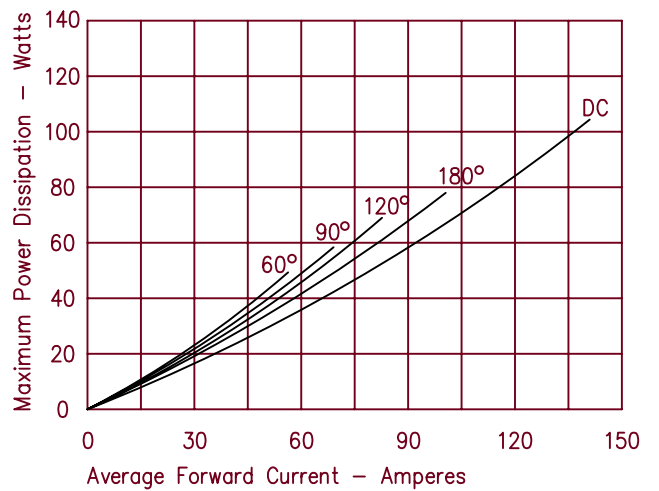

HU101

Figure 1
Typical Forward Characteristics

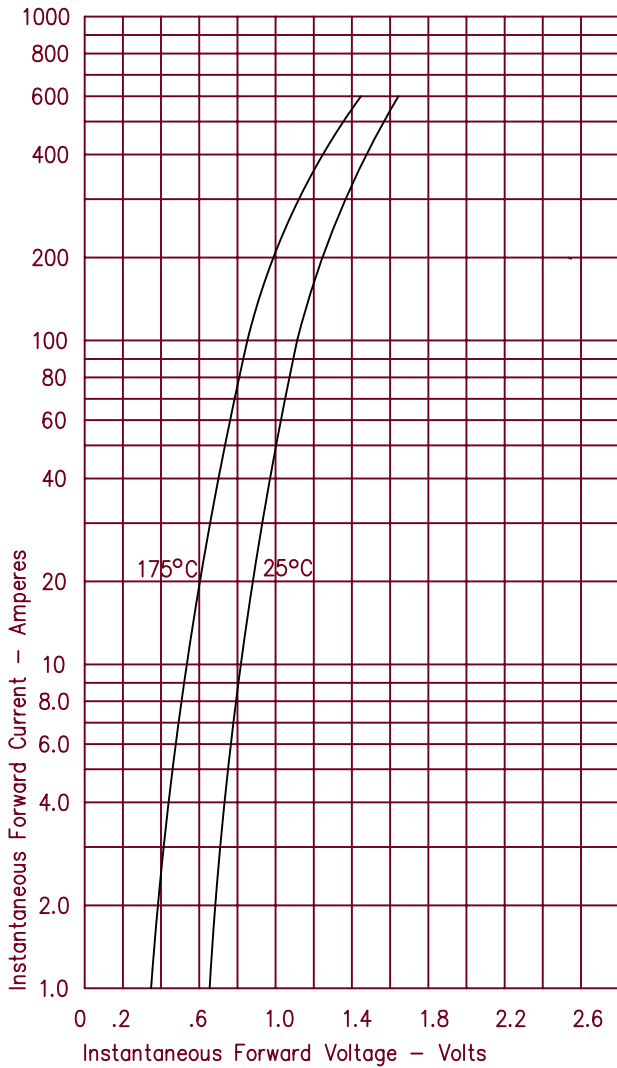


Figure 3
Typical Junction Capacitance

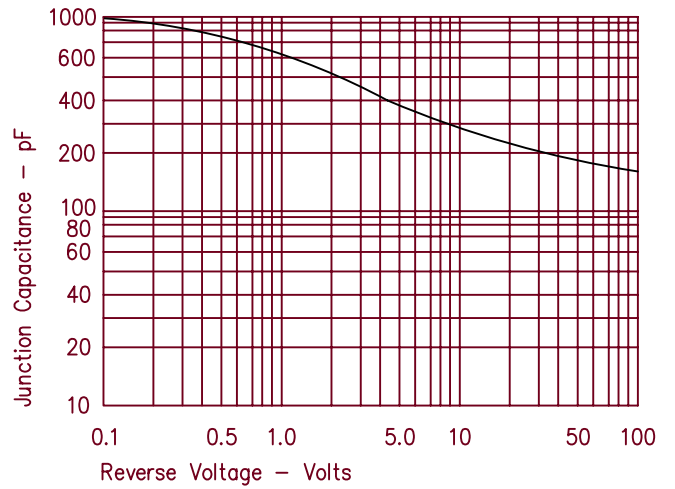


Figure 4
Forward Current Derating

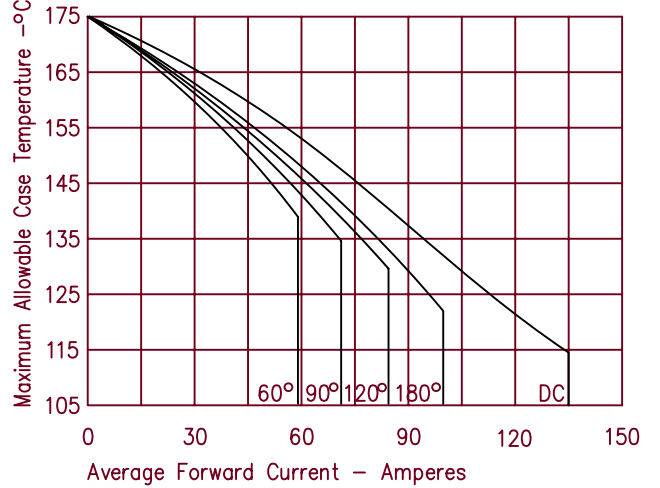


Figure 2
Typical Reverse Characteristics


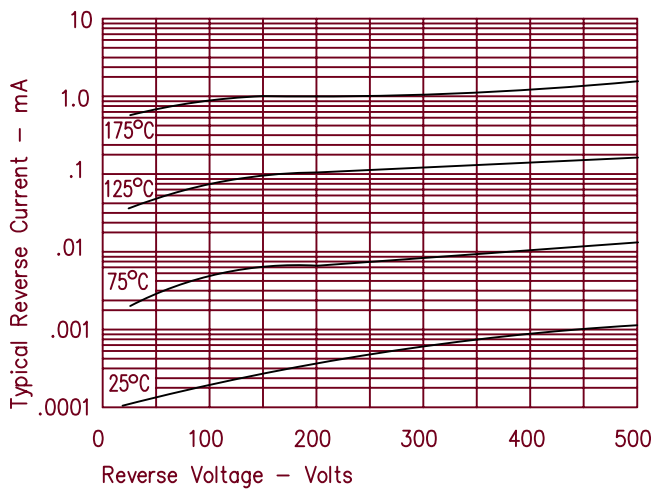


Figure 5
Maximum Forward Power Dissipation

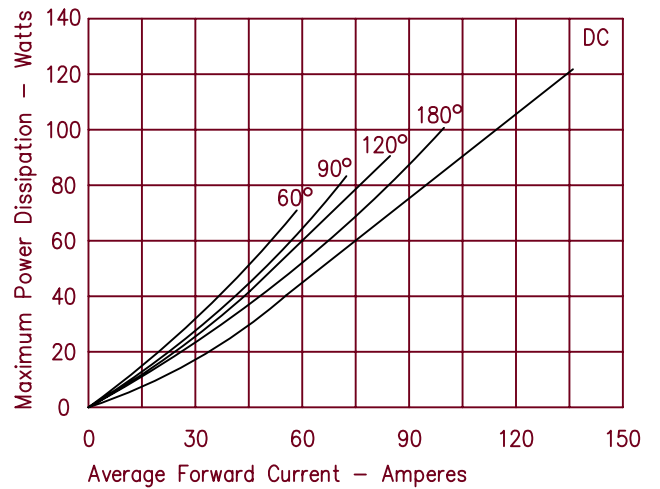

HU102

Figure 1
Typical Forward Characteristics

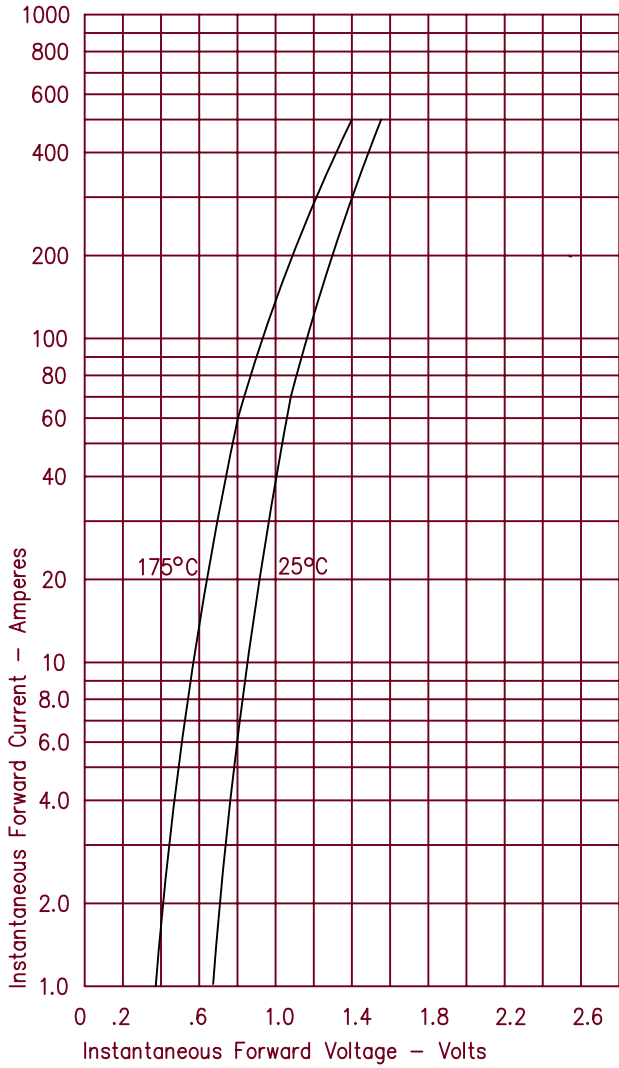


Figure 3
Typical Junction Capacitance

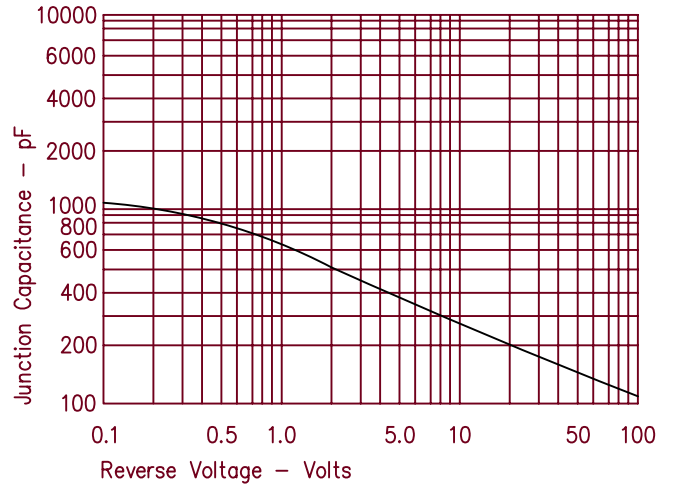


Figure 4
Forward Current Derating

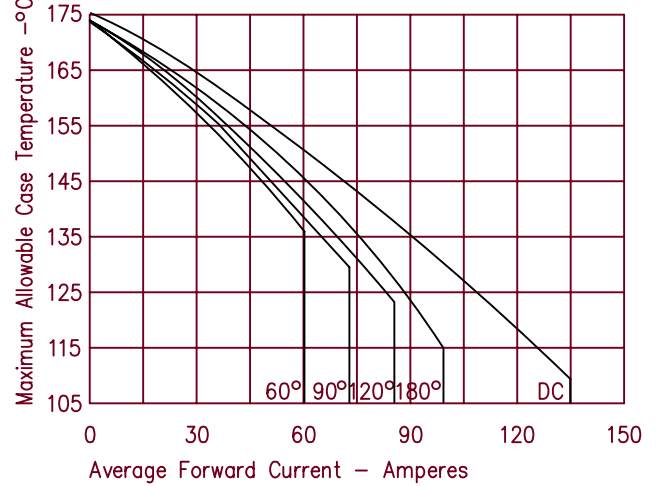


Figure 2
Typical Reverse Characteristics

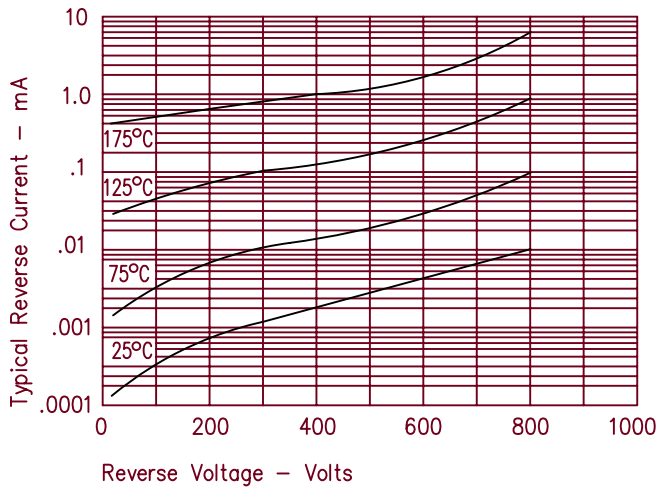


Figure 5
Maximum Forward Power Dissipation

