FOXCONN®

SPECIFICATIONS

SFP CONNECTOR

3S Series, SFP(Small Form-Factor Pluggable) standard type, 1x1, 0.8mm pitch

Mechanical

***Contact Retention Force**: 0.21Kg(0.44Lb)min.*
***Durability:** 100 Cycles*

Electrical

***Voltage Rating:** 120V*
***Current Rating**: 0.5A*
***Contact Resistance:** 35mΩ max.*
***Dielectrical Withstanding Voltage:** 300V*
***Insulation Resistance:** 500MΩ min.*

Physical

***Housing:** LCP, UL 94-0, Black*
***Contact:** Phosphor Bronze*
***Plating:** See "ORDERING INFORMATION"*
***Operating Temperature:** -55℃ to +85℃*

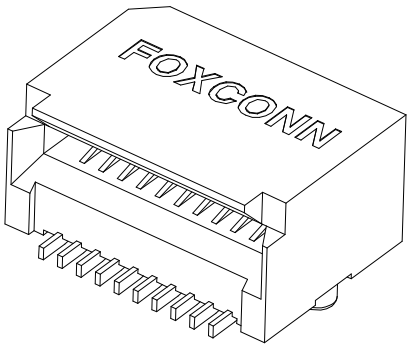

DRAWING

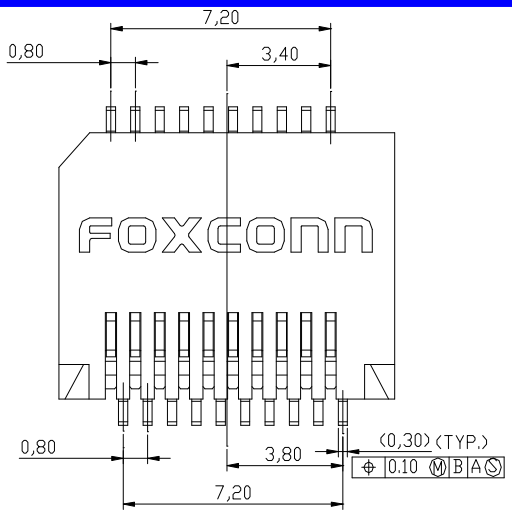

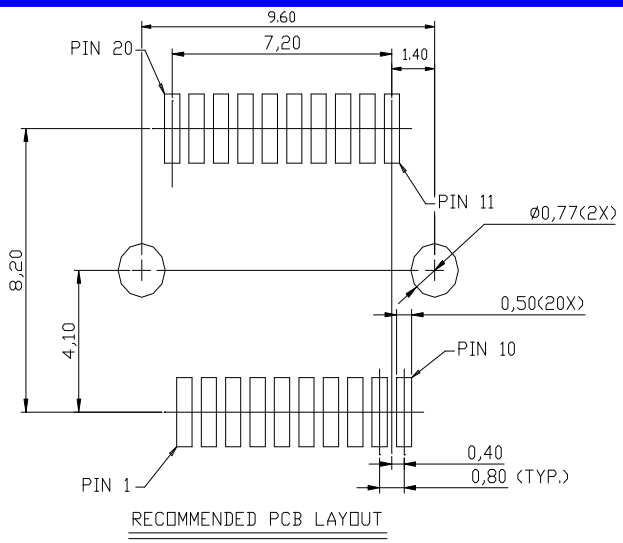

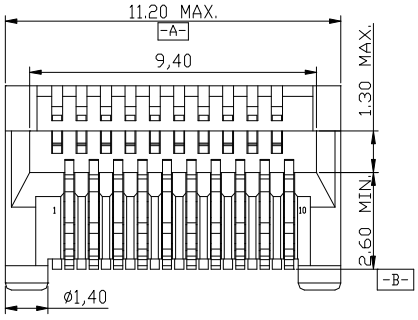

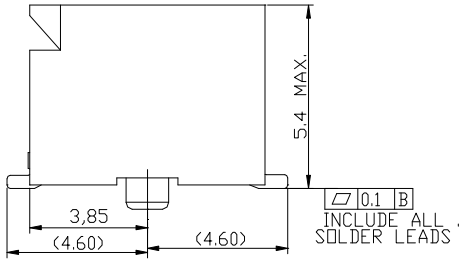

ORDERING INFORMATION

PRODUCT NO:

3S10202 3 - 011 - * *

- LEAD FREE CODE
  - NONE: TIN/LEAD
  - F: LEAD FREE
- PACKAGE
  - 7: TAPE & REEL
- PLATING
  - 3 : 30u" GOLD PLATING

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.