


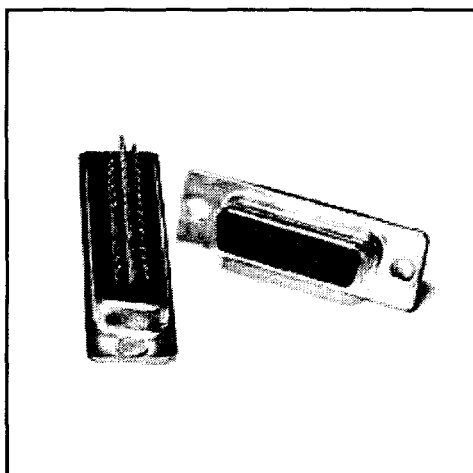

4107-[*]H
Male

4108-[*]H
Female

*Number of contacts;
Options are:
15, 26, 44, 62, 78

FEATURES:


- Bright tin shell for excellent EMC / grounding
- Preloaded solder cup contacts
- Indentations on male type for optimum mating, retention & grounding
- Four shell sizes

ELECTRICAL:

- Current rating: 5 AMP maximum
- Contact resistance: 15 milliohms minimum
- Insulation resistance: 1000 Megohms minimum
- Dielectric withstanding voltage: 1000 VAC minimum


MATERIAL:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Phosphor bronze
- Plating: 6μ" gold over nickel in contact area
- Operating temperature: -55°C to +105°C
- Color: black

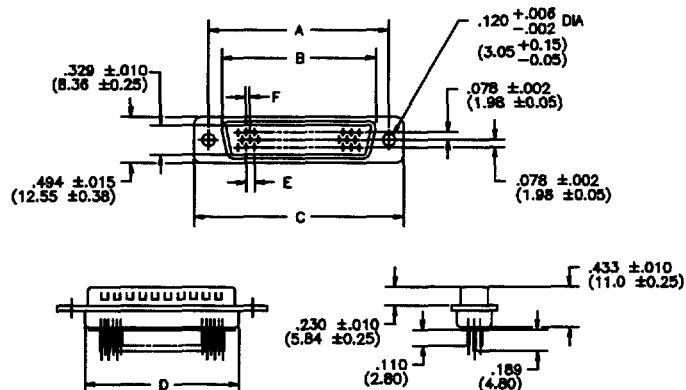

4107 Male

NO. OF POS.	A ±.005(0.13)	B ±.010(0.25)	C ±.015(0.38)	D ±.010(0.25)	E ±.002(0.05)	F ±.002(0.05)
15	.984 (24.99)	.666 (16.92)	1.216 (30.89)	.759 (19.28)	.090 (2.29)	.045 (1.14)
26	1.312 (33.32)	.994 (25.25)	1.539 (39.10)	1.083 (27.51)	.090 (2.29)	.045 (1.14)
44	1.852 (47.04)	1.534 (38.96)	2.090 (53.09)	1.625 (41.30)	.090 (2.29)	.045 (1.14)
62	2.500 (63.50)	2.181 (55.42)	2.732 (69.40)	2.272 (57.71)	.095 (2.41)	.047 (1.20)
78	2.41 (61.11)	2.08 (52.81)	2.64 (66.93)	2.18 (55.32)	.095 (2.41)	.047 (1.20)

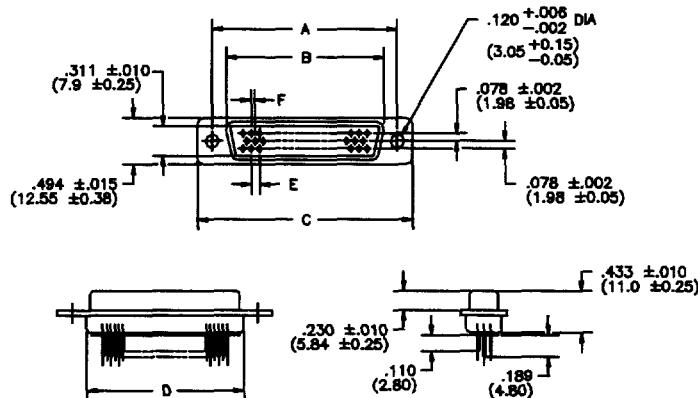

4108 Female

NO. OF POS.	A ±.005(0.13)	B ±.010(0.25)	C ±.015(0.38)	D ±.010(0.25)	E ±.002(0.05)	F ±.002(0.05)
15	.984 (24.99)	.643 (16.33)	1.216 (30.89)	.759 (19.28)	.090 (2.29)	.045 (1.14)
26	1.312 (33.32)	.971 (24.66)	1.539 (39.10)	1.083 (27.51)	.090 (2.29)	.045 (1.14)
44	1.852 (47.04)	1.511 (38.38)	2.090 (53.09)	1.625 (41.30)	.090 (2.29)	.045 (1.14)
62	2.500 (63.50)	2.16 (54.84)	2.732 (69.40)	2.272 (57.71)	.095 (2.41)	.047 (1.20)
78	2.41 (61.11)	2.06 (52.20)	2.64 (66.93)	2.18 (55.32)	.095 (2.41)	.047 (1.20)