

PRODUCT NO.
SEE NOTE 5

NOTE

1. MATERIAL:

- HOUSING: NYLON 6T UL94V-0 COLOR: WHITE.
- ACTUATOR: PPS UL94V-0 COLOR: NATURE.
- CONTACT: PHOSPHOR BRONZE.
- HOLD-DOWN : BRASS

2. PLATING:

CONTACT: 100u" SnPb OVER 45u" Ni.
SOLDERTAIL : 100u" SnPb OVER 45u" Ni.

3. ELECTRICAL

INSULATOR: 500 M ohm MIN.
CURRENT RATING: 1 AMP CONTINUOUS.
VOLTAGE RATING: 50 V AC/DC.
CONTACT RESISTANCE: 20 m ohm MAX.

4. ENVIRONMENTAL PROPERTIES



TEMPERATURE RANGE: -20°C TO +85°C

5. ORDERING DATA




61317- X 0 0 0 XX

POSITIONS
PACKAGE TYPES:
P: PVE TUBE
T: TAPE & REEL

No. of Position	Dim. A mm	Dim. B mm	Dim. (C) mm	Dim. (D) mm
3	2.00	4.30	7.80	9.80
4	3.00	5.30	8.80	10.80
5	4.00	6.30	9.80	11.80
6	5.00	7.30	10.80	12.80
7	6.00	8.30	11.80	13.80
8	7.00	9.30	12.80	14.80
9	8.00	10.30	13.80	15.80
10	9.00	11.30	14.80	16.80
11	10.00	12.30	15.80	17.80
12	11.00	13.30	16.80	18.80
13	12.00	14.30	17.80	19.80
14	13.00	15.30	18.80	20.80
15	14.00	16.30	19.80	21.80
16	15.00	17.30	20.80	22.80
17	16.00	18.30	21.80	23.80
18	17.00	19.30	22.80	24.80
19	18.00	20.30	23.80	25.80
20	19.00	21.30	24.80	26.80
21	20.00	22.30	25.80	27.80
22	21.00	23.30	26.80	28.80
23	22.00	24.30	27.80	29.80
24	23.00	25.30	28.80	30.80
25	24.00	26.30	29.80	31.80
26	25.00	27.30	30.80	32.80
27	26.00	28.30	31.80	33.80
28	27.00	29.30	32.80	34.80
29	28.00	30.30	33.80	35.80
30	29.00	31.30	34.80	36.80
31	30.00	32.30	35.80	37.80
32	31.00	33.30	36.80	38.80

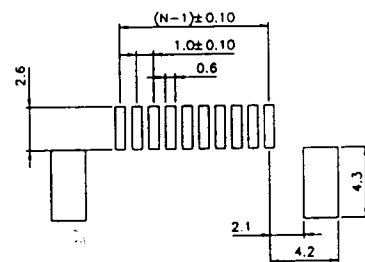

RECOMMENDED PC BOARD LAYOUT

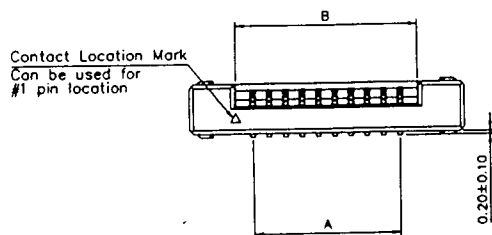

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr no	dr	date	linear	0.0±0.20	projection	title		
A	T65069	AC	960209		0.0±0.15	MM/INCH	FPC CONN. UPPER CONTACT		
B	T75027	AC	7/01/97	angles	0.0±0.10		product family		
				dr	ANDY C	6/25/97	size		code
				enr	ANDY C	6/25/97	dwg no		sheet
				chr	CL CHEN	7/01/97	A3		61317
				ppd	CL CHEN	7/01/97			1 of 1
sheet	revision	B							
index	sheet	1							