

Product Specifications



F4A-PDMDM-15-USA.

FSJ4-50B SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Male, 4.572 m



CHARACTERISTICS


General Specifications

| | |
|-------------------------|---------------------|
| Body Style, Connector A | Straight |
| Body Style, Connector B | Straight |
| Cable Family | FSJ4-50B |
| Interface, Connector A | 7-16 DIN Male |
| Interface, Connector B | 7-16 DIN Male |
| Length | 4.572 m 15.000 ft |

Electrical Specifications

| | |
|------------------|-------------|
| 3rd Order IMD | -100.00 dBm |
| DTF, Connector A | -32.00 dB |
| DTF, Connector B | -32.00 dB |

Jumper Assembly Sample Label

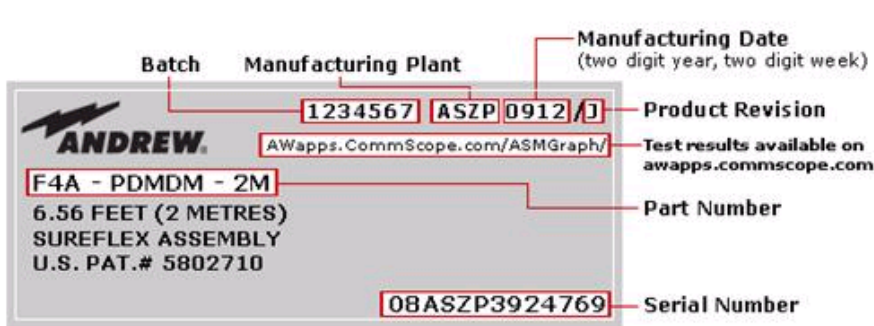

Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|------|------------------|
| 698-960 MHz | 1.06 | 30.00 |
| 1700-2200 MHz | 1.06 | 30.00 |

Regulatory Compliance/Certifications

| Agency | Classification |
|--------|----------------|
|--------|----------------|

www.commscope.com/andrew

Join the Evolution

©2010 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See www.commscope.com/andrew for the most current information.

page 1 of 2
4/19/2010

Product Specifications



F4A-PDMDM-15-USA.

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006

Compliant by Exemption
Above Maximum Concentration Value (MCV)



INCLUDED PRODUCTS



FSJ4-50B

FSJ4-50B, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket
