

SPECIFICATIONS

Mechanical

Mating Force: 0.5~3.0Kg(1.10~6.61Lb) (single port)
Unmating Force: 0.5~3.0Kg(1.10~6.61Lb) (single port)
Durability: 100Cycles


Electrical

Current Rating: 1A
Contact Resistance: 30mΩ max.(initial) 80mΩ max.(after test)
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 100MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact and Shell: Copper alloy&Iron alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -25°C to +70°C

RCA JACK Series
Vertical, T/H
RCA&MINI DIN. Structure

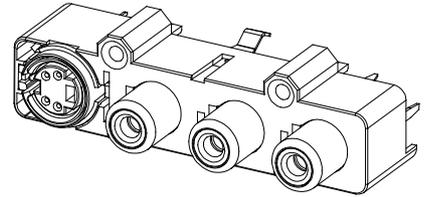

DRAWING

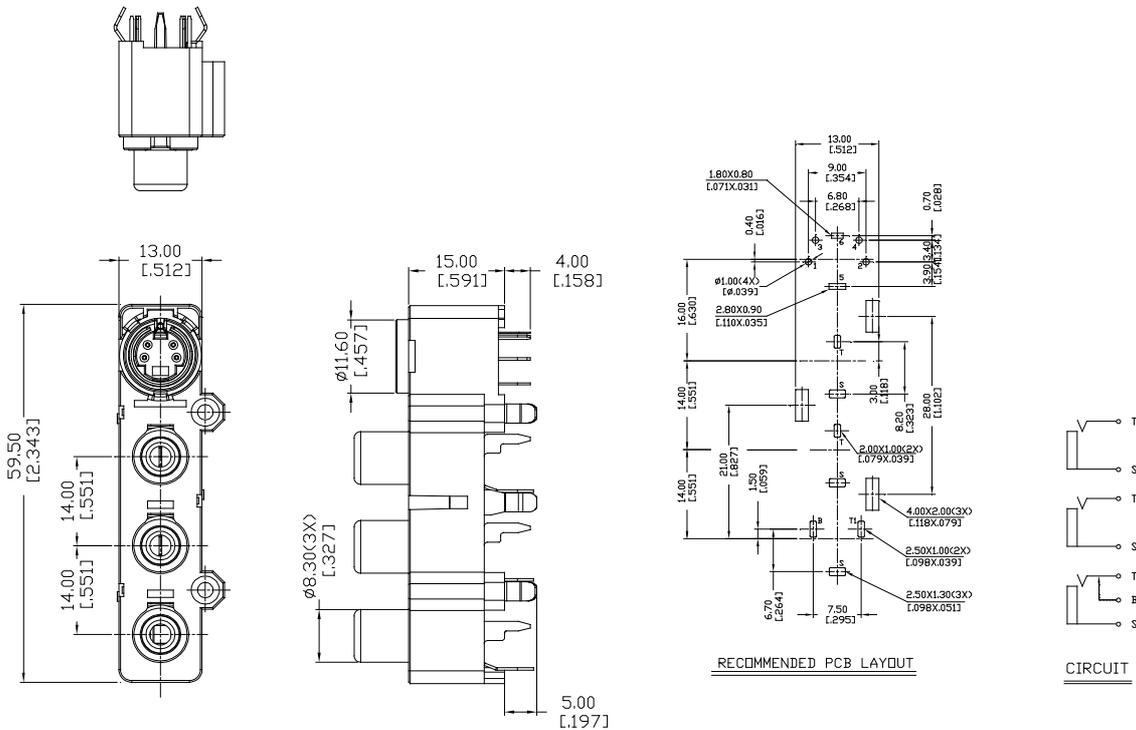

ORDERING INFORMATION

PRODUCT NO. JR 0 1 0 3 0 - W M 7 1 - 4 F

RCA JACK SERIES ————
 TERMINATION TYPE ————
 0=VERTICAL
 CONTACT TYPE ————
 1=FEMALE
 SWITCH FUNCTION ————
 0=WITHOUT SWITCH
 PLUGS DIAMETER ————
 3=Φ3.20mm
 CONTACT AREA PLATING ————
 0=150U" Sn

LEAD FREE
 SOFT TRAY
 MODIFICATION CODE
 BODY TYPE
 VERTICAL