





RL-2252

50/60 Hz TRANSFORMERS

ALL/TRAN™ Class 2

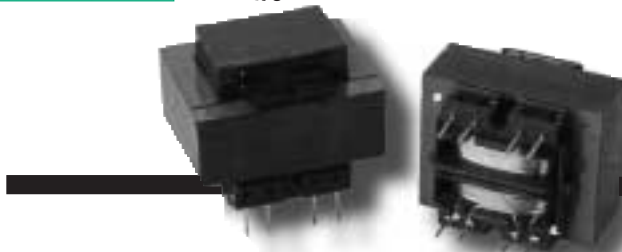


Primaries are designed to be used simultaneously. That is, they must be used either series or parallel connected (as one winding).

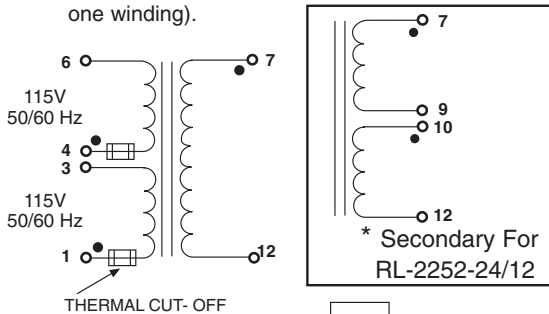

The RL-2252 Series International Power Transformers are designed to meet UL, VDE, IEC, CSA requirements. Available in rating of 2.5 through 50VA. Designed to UL1585 Class 2 with all primaries thermally protected for your safety. PC Board mount with all advantages of RL-2250 International Series. Hipot tested at 4000VRMS. Manufactured to Class B (130°) Insulation.

Designed to the newest 2001 UL class 2 specification. All transformers do not exceed 30 volts under no load condition, and are thermally protected with a fuse.
SUPERIOR, SAFER, AND LOWER COST THAN THE COMPETITION.

ALL DIMENSIONS IN INCHES

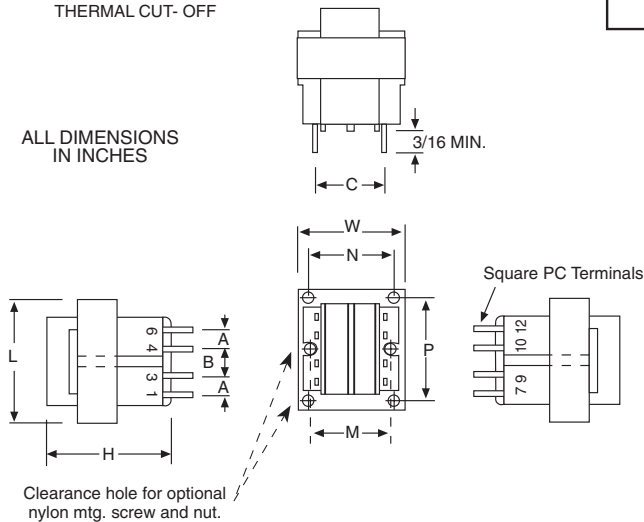

PART NO.	SECONDARY RMS RATING
RL-2252-2.5-12	12V @ .20A
RL-2252-2.5-24	24V @ .10A
*RL-2252-2.5-24/12	12V @ .20A or 24V @ .10A
RL-2252-5.0-12	12V @ .42A
RL-2252-5.0-24	24V @ .20A
RL-2252-10-12	12V @ .83A
RL-2252-10-24	24V @ .42A
RL-2252-20-12	12V @ 1.66A
RL-2252-20-24	24V @ .833A
RL-2252-30-12	12V @ 2.50A
RL-2252-30-24	24V @ 1.25A
RL-2252-50-12	12V @ 4.20A
RL-2252-50-24	24V @ 2.10A

VA	Dimensions						Pin Dimensions	Mfg.			Mfg. Size	Screw Quantity
	L	W	H	A	B	C		M	N	P		
2.5	1.625	1.312	1.125	.200	.250	1.000	0.025SQ	1.062	-	-	#4	2
5.0	1.625	1.312	1.375	.200	.400	1.000	0.025SQ	1.062	-	-	#4	2
10.0	1.875	1.562	1.375	.200	.400	1.140	0.038SQ	1.25	-	-	#4	2
20.0	2.25	1.875	1.625	.400	.400	1.460	0.038SQ	1.5	-	-	#4	2
30.0	2.625	2.187	1.562	.550	.275	1.680	0.045SQ	-	1.75	2.187	#6	4
50.0	3.00	2.50	1.812	.600	.300	1.900	0.045SQ	-	2	2.5	#6	4



RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

SINCE 1955 Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com