REVISION E

DO NOT SCALE FROM THIS PRINT

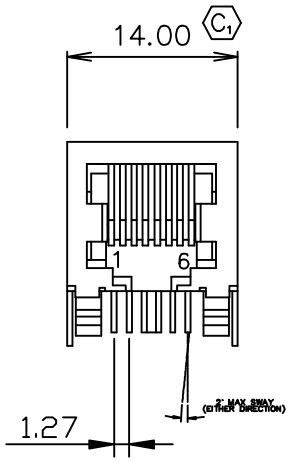

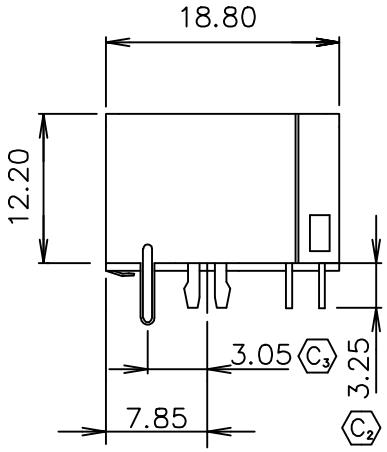

FIG. 1



MODS-C-6PXC-X-XX

TYPE
-C

POSITIONS/CONTACTS
-6P4C: 6 Pos/4 Con
-6P6C: 6 Pos/6 Con

C6 PLATING
-G: .000015" Au
-H: .000030" Au
-E: .000050" Au

SHIELD
-S: SHIELDED
-S1: TOP & BOTTOM PANEL GROUNDS ONLY (SEE PAGE 2)

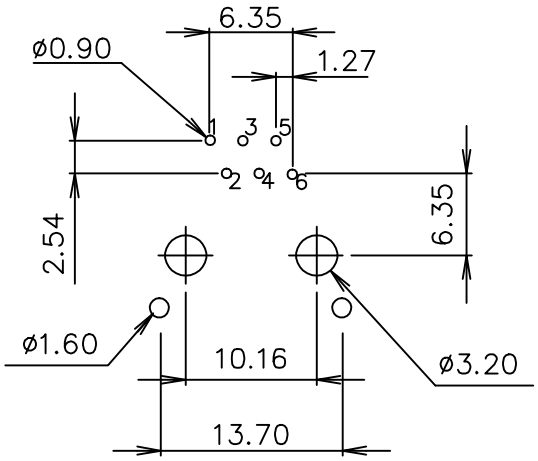

-S PCB Layout

NOTES:

1. C* REPRESENTS A CRITICAL DIMENSION
2. PLATING APPLIES TO MATING AREA, GOLD FLASH ON TAILS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:

DECIMALS	ANGLES
X.XX±0.25	±3
X.XXX±0.13	
X.XXXX±0.05	

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

samtec
520 PARK EAST BLVD. NEW ALBANY, IN 47150
(812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085

CODE: 55322

DO NOT SCALE DRAWING — SHEET SCALE: 1:2

INSULATOR: PBT 20% Glass Filled (UL 94V-0) Black
CONTACT : Phosphor Bronze
SHELL : Copper Alloy

F:\DWG\MISC\MKGT

DESCRIPTION: Very Low Profile PCB Shielded Jack

DWG. NO. MODS-C-6PXC-X-XX

BY: J.Riley 12/31/2003 — SHEET 1 OF 2