



Series 112, 113, & 114 Deci-Center™ Jumpers

FEATURES:

- Aries offers a wide array of DIP jumper configurations and wiring possibilities for all your programming needs.
- Reliable, electronically tested solder connections.
- DIP-end cable is potted to provide strain relief.
- Protective covers are also provided on header.
- Pitch bars help maintain .100 [2.54] conductor spacing.
- 10-color cable allows for easy identification and tracing.
- Consult factory for jumper lengths under 3.000 [76.20].

SPECIFICATIONS:


- Header body and pitch bar are red UL 94-HB Glass-filled Nylon. Consult factory for UL 94V-0 rated material.
- Header pins are Brass, 1/2 hard.
- Pin plating is 10μ [25μm] min. Gold per MIL-G-45204 over 50μ [1.27μm] min. Nickel per QQ-N-290.
- Cable insulation is UL Style 2697 Polyvinyl Chloride (PVC).
- Cable laminate is clear PVC, self-extinguishing.**
- .050 [1.27] pitch conductors are 28 AWG, 7/36 strand, Tinned Copper per ASTM B 33 (.039 [.99] pitch conductors are 26 AWG, 7/34 strand).
- Cable current rating=1 Amp @ 10°C [50°F] above ambient.
- Cable voltage rating=300 Volts.
- Cable temperature rating=176°F [80°C].
- Cable capacitance=13.0 pf/ft. [42.7pf/meter] nominal @1 MHz.**
- Crosstalk: 10' sample, 5 ns rise time with 2 lines driven. Near end=4.7%; Far end=4.3% nominal.**
- Propagation delay=1.5 ns/ft. [4.9 ns/meter] nominal.**
- Insulation resistance=10¹⁰ Ohms (10 ft. [3 meters] min.).

**Note: Applies to .050 [1.27] pitch cable only.

MOUNTING CONSIDERATIONS:

- Suggested PCB hole size=.033 ± .002 [.86 ± .05].

"X"=(NO. OF CONDUCTORS - 1) X .100 [2.54]

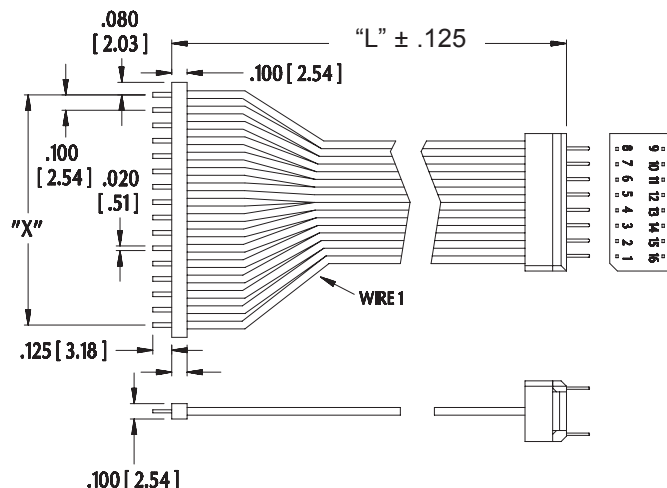

SERIES 112



ARIES
ELECTRONICS, INC.

<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



UK/IRELAND/GB
TEL: +44 870 240 0249
FAX: +44 1653 690980
uking@arieselec.com

EUROPE/MAINLAND/HOLLAND
TEL: +31 78 615 94 65
FAX: +31 78 615 43 11
europe@arieselec.com

11008
REV.C



Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

XX-XXX-XXX

No. of conductors
(see table)

Cable length in inches:
EX: 3" = -003/- 3.5 = -003.5-
min. length = 3" [76.20mm]

Jumper series:
112, 113, 114
112X, 113X, 114X
(see Data Sheet
No. 11009 for
wiring table)

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13]
unless otherwise specified

Centers "C"	Dim. "D"	Available Sizes
.300 [7.62]	.395 [10.03]	4 thru 20
.400 [10.16]	.495 [12.57]	22
.600 [15.24]	.695 [17.65]	24, 28, 40

Numbers
shown pin
side for
reference
only.

See Data Sheet No.
11009 for other
configurations and
additional information.