

B28

FEMALE HEADER PROFILE : 4.5mm

PITCH: 1.27mm

MATERIAL

INSULATOR - LCP (UL 94V-0)
CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

15 MILLIOHM MAX.

INSULATION RESISTANCE


500 MEGOHM MIN.

DIELECTRIC VOLTAGE






500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

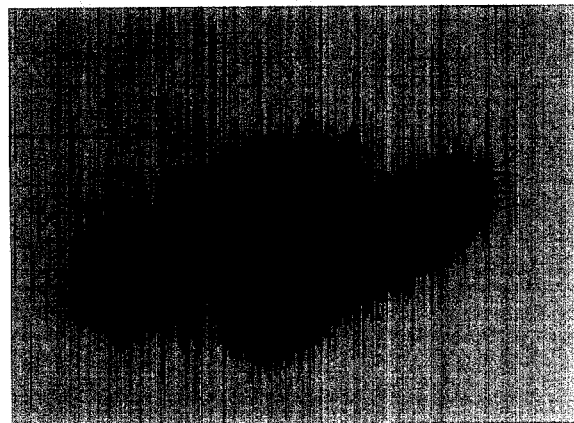

B

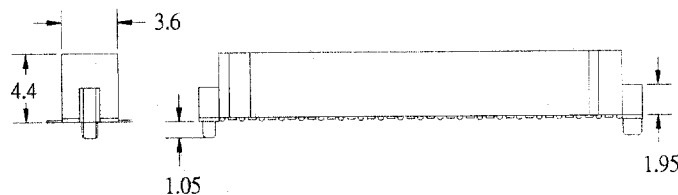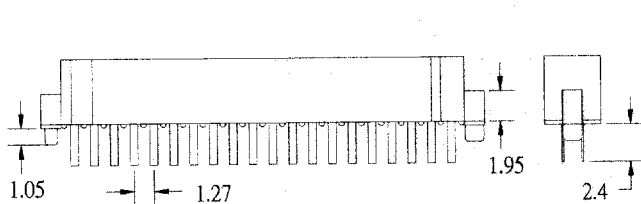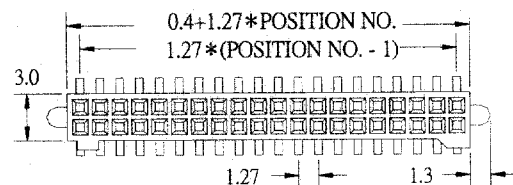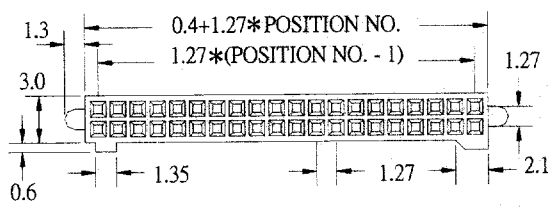

HOW TO ORDER

B28 - 1 - 2 - 3 - 4 - 5 - 6

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.MOUNTING TYPE	5.SPECIAL FUNCTION	6.INSULATOR COLOR
DUAL ROW 2*5 - 2*60	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: THROUGH HOLE B: SMT TYPE	A: W POLARIZATION PEG B: W/O POLARIZATION PEG	1. BLACK



DON CONNEX ELECTRONICS CO., LTD.

TEL:886 2-26473356 FAX:886 2-26425885 • 26481014