

*GPX Series Gang
Jacks Right Angle and
Perpendicular PCB Mount*

Features   

- Available in 6 and 8 Position Housings
- Available in Both Right Angle and Top Entry Versions
- Ribbed Pin Guides
- Metal Locking Brackets
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material
Thermoplastic, UL 94V-0 Rated, Gray Color

Contact Material
Phosphor Bronze

Electrical Characteristics

Insulation Resistance
500 Megohms Min

Dielectric Withstanding Voltage
1000V AC RMS for 1 Minute


Contact Resistance
20 Milliohms Max

Current Rating
1.5 Amps

MODULAR JACKS AND PLUGS

GPX Series

Ordering Information

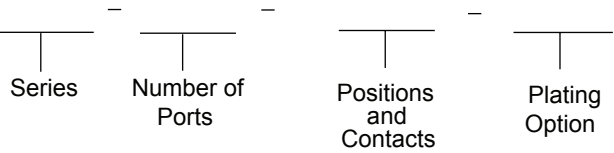

Series
GPX - Perpendicular P.C.B. Mount

Number of Ports, Positions & Contacts

No. of Port	No. of Positions & Contacts			
1	-	-	-	88
2	62	64	66	88
3	62	64	66	88
4	62	64	66	88
5	62	64	66	-
6	62	64	66	-
7	62	64	66	-
8	62	64	66	-

Plating Option

Designator	Plating Description
Standard	Contacts are Plated with 0.0001 Nickel, Selective Plating 0.000015 Gold on Contact Area
50	Contacts are Plated with 0.0001 Nickel, Selective Plating 0.000050 Gold on Contact Area to Comply With FCC Requirements Under #47 C.F.R. Part 68 Subpart F

GPX Series Dimensions
Dimensions in mm [In]

