

300mA 25kV HIGH VOLTAGE DIODES

Finds use in applications such as Monitors,
Static electricity dust collectors,Laser power
supplies,ect..

■ Features

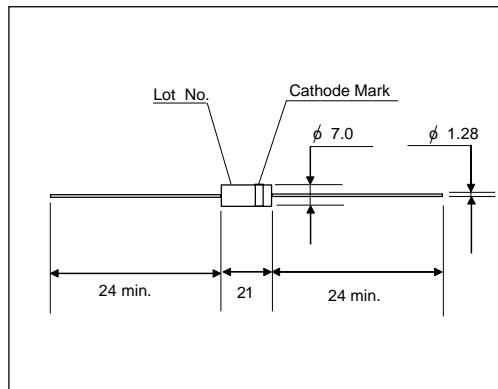
- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

■ Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

■ Outline Drawings : mm**■ Cathode Mark**

Type	Mark
HV600S25	

Items	Symbols	Condition	HV600S25	Units
Repetitive Peak Reverse Voltage	V _{RRM}		25	kV
Average Output Current	I _O	T _a =25°C, Resistive Load	300	mA
Surge Current	I _{FSM}		30	A _{peak}
Junction Temperature	T _J		120	°C
Allowable Operation Case Temperature	T _C		120	°C
Storage Temperature	T _{Stg}		-40 to +120	°C

- Electrical Characteristics (T_a=25°C Unless otherwise specified)

Items	Symbols	Conditions	HV600S25	Units
Maximum Forward Voltage Drop	V _F	at 25°C, I _F = I _{F(AV)}	21	V
Maximum Reverse Current	I _{R1}	at 25°C, V _R = V _{RRM}	5.0	uA
	I _{R2}	at 100°C, V _R = V _{RRM}	50	uA
Maximum Reverse Recovery Time	T _{rr}	at 25°C	--	nS
Junction Capacitance	C _j	at 25°C, V _R =0V, f=1MHz	--	pF