


Legacy NMA2416-A2S 7.8 GHz to 8.5 GHz

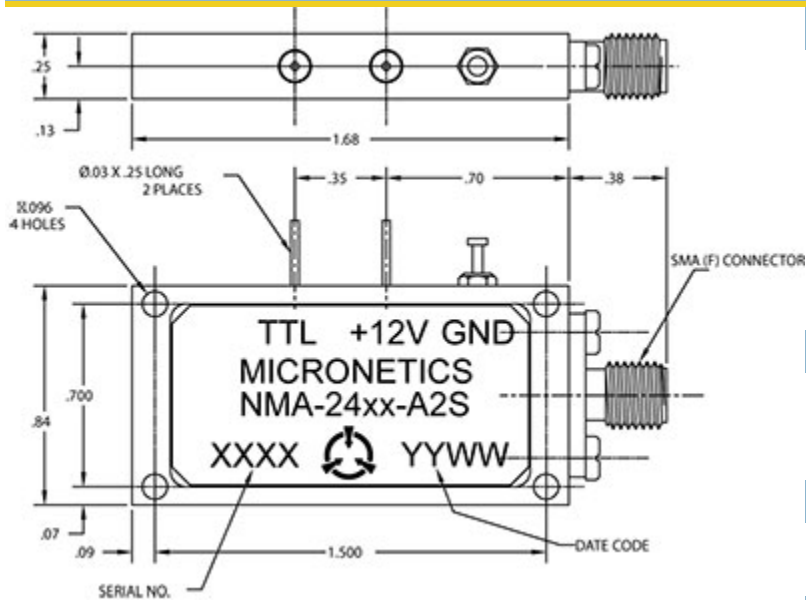

Specifications

RF Frequency	7.8 GHz to 8.5 GHz
Noise Output	74 dB Min ENR
Noise Spectral Density (N_0)	-100 dBm/Hz Min
Flatness	2 dB P-P Max
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	350 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	S Package
Connector Type	SMA(f)

Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 125 °C

Notes

Option TTL

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

